

INSTRUCTIONS FOR:

LOW LEVEL OIL DRAINER

Model Nos: **AK464DX.V2 & AK465D.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT

PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE, AND/OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- ✓ Replace damaged parts. *Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Keep the drainer clean and in good condition for best and safest performance.
- ✓ Wear appropriate protective clothing.
- ✓ Use drainer in a suitable working area. Keep area clean and tidy, and free from unrelated materials and ensure that there is adequate lighting.
- ✓ Ensure that the floor is not slippery and wear non-slip shoes.
- ✓ Keep children and unauthorised persons away from the work area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- ☐ **WARNING!** *DO NOT allow uncontrolled discharge of fluids which would pollute the environment.*
- ✗ *DO NOT position the drainer in such a way that it becomes a hazard to others in the work area.*
- ▲ **IMPORTANT:** AK464DX.V2 must be used in conjunction with a wall mounted air pump, model no: AK450DP in order to discharge waste oil, (not supplied with this unit).

2. DESCRIPTION


These steel drain pans are designed to collect waste oil via the top collection facility. The pans have front wheel steering and are suitable for use on forecourts as well as workshop floors. The 95 litre capacity is ideal for use with commercial vehicles. Model AK465D.V2 is fitted with a gravity drain tap and model AK464DX.V2 has a dry-fit male coupling for connection to wall mounted air pump AK450DP.

3. SPECIFICATIONS & PARTS

AK464DX.V2 & AK465D.V2
 Maximum capacity95litres
 Height270mm Exl handle
 Length1285mm
 Width800mm
 Net weight33kg

AK464DX.V2 DischargeAir pump
 AK465D.V2 DischargeGravity

Item	Part Number	Description
1	345-J1107	90 Litre sump drain unit
2	345-J1181	3mm Rear grip
3	345-J2254-M	3/4" Quick release coupling (male) (AK464DX.V2)
	345-J4175	3/4" BSP drum tap (AK465D.V2)
4	345-J9403-3	V18 1" Bore soft loader wheels
5	345-J9403-6	1" Domed starlock washer
6	345-J9406	Swivel castor
7	345-J9406-B	Swivel castor with brake
8	345-J9500-1C	Capscrews M8 X 1.25 X 20mm
9	345-J9500-2C	Nuts BZP M8 X 1.25

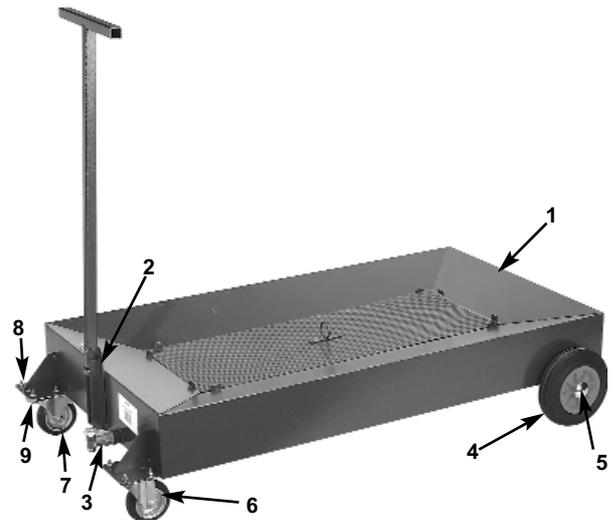

4. OPERATING INSTRUCTIONS

4.1. Collection of waste oil

- 4.1.1. If unit has been used to drain a previous vehicle check to ensure that there is sufficient spare capacity before you next use pan.
- 4.1.2. Place the pan under the vehicle's sump and drain accordingly.
- 4.1.3. When draining is complete remove pan and wipe up any spillage.

4.2. Evacuation of waste oil from pan unit.

☐ **WARNING!** *Dispose of all waste in accordance with local regulations.*

- 4.2.1. AK464DX.V2 - Take the discharge hose of wall mounted pump unit AK450DP and connect the female coupling to the male coupling of the pan unit and evacuate waste accordingly.
- 4.2.2. AK465D.V2 - Connect a suitable discharge hose, or position the gravity drain tap over a suitable outlet and open the tap.
When not in use store pan in a safe, dry, childproof location.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions, call us on 01284 757525 and leave your full name and address including your postcode.



Sole U.K. Distributor
 Sealey Group,
 Bury St. Edmunds,
 Suffolk.



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk