



# PLUNGER CAN

MODEL NO: **PC1, PC19, PC38**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear protective gloves



Wear eye protection



Wear face mask



Flammable



Wear protective clothing

## 1. SAFETY

### 1.1. GENERAL SAFETY

- WARNING!** Ensure Health & Safety regulations relating to the use of flammable liquids are adhered to when using this equipment. Familiarise yourself with the Plunger Can's application and potential hazards.
- DO NOT** smoke whilst handling the Plunger Can and fluids.
- DO NOT** operate the Plunger Can in areas where there may be flying sparks or other sources of ignition.
- DO NOT** use the Plunger Can to soak rags without the plunger attached.
- Maintain Plunger Can in good condition.
- Wear suitable protective clothing (PPE) including gloves and eye protection.
- Ensure the work area is free of clutter and has adequate lighting.
- Keep children and unauthorised persons away from the work area.
- Dispose of used cloths in a safe manner and away from sources of ignition.
- When not in use store in a safe manner and away from sources of ignition.

## 2. INTRODUCTION

Easy one-handed operation, convenient and safe for dispensing flammable solvents. Spring-mounted plunger delivers measured amounts of liquid to swab/cloth. Perforated metal flash arrestor protects against ignition and escape of flammable vapours. Surplus liquid drains safely back into reservoir.


## 3. OPERATION

### 3.1. Filling the can.

- 3.1.1. To fill the can, remove the plunger mechanism by twisting through 90° anti-clockwise (Fig.1).
- 3.1.2. Fill the can no more than three quarters full.
- 3.1.3. Replace the plunger by inserting back into the can, aligning up the two rollers on the underside of the plunger mechanism with the two cutaways on the can and turning 90° clockwise until it locks in place.

### 3.2. To soak a cleaning cloth with fluid.

- 3.2.1. Wearing suitable hand protection, place cloth over the perforated flash arrestor on the plunger.
- 3.2.2. Push the plunger down and release, repeat this procedure until you have sufficiently wet the cloth.
- 3.2.3. Any excess fluid will drain back into the reservoir.
  - WARNING: DO NOT** operate the plunger without a cloth covering the perforated flash arrestor as cleaning fluid may be ejected, causing personal injury.

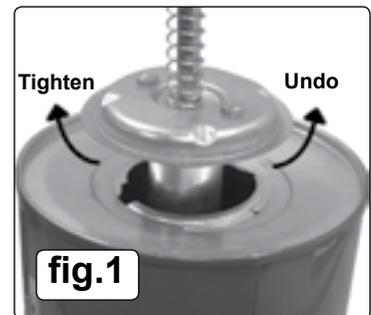

### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR

01284 757500

01284 703534

sales@sealey.co.uk

www.sealey.co.uk