

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.2 GENERAL SAFETY


❑ **WARNING!** Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this tool.

❑ **WARNING!** Familiarise yourself with the specific applications and limitations of the bush replacement tool, as well as any potential hazards.

- ✓ This tool should be used in conjunction with inspection maintenance procedures recommended in the vehicle manufacturer's manual.
- ✓ Ensure that the bush replacement tool is the correct tool for the task.

DO NOT use the bush replacement tool for any purpose other than that for which it is designed.

- ✓ Ensure that the vehicle is properly supported with axle stands before working under the vehicle.
- ✓ Ensure there is adequate lighting prior to using the bush replacement tool. A range of inspection lamps is available from your local Sealey dealer.
- ✓ Keep children and unauthorised persons away from the working area.
- ✗ **DO NOT** use the bush replacement tool if any parts are damaged or missing, as this may cause failure and/or personal injury.
- ✗ **DO NOT** use the bush replacement tool when you are tired, or under the influence of alcohol, drugs or intoxicating medication.

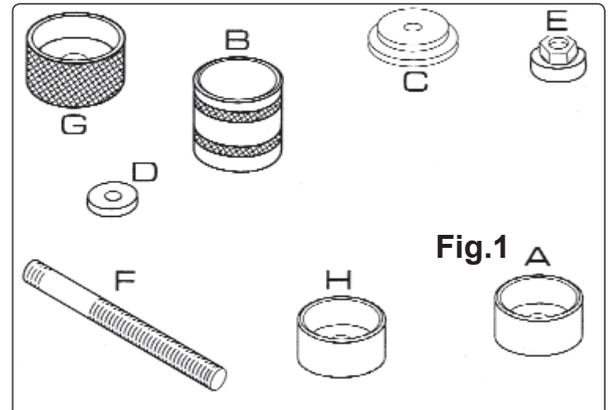

ALWAYS KEEP FORCE (F) SCREW WELL LUBRICATED.




DO NOT USE AIR TOOLS



Threaded rod maximum load 150Nm. Exceeding this load will shorten the life of the threaded rod. The threaded rod is considered to be a consumable item and is NOT covered under warranty.

2. OPERATING INSTRUCTIONS

Fig.2

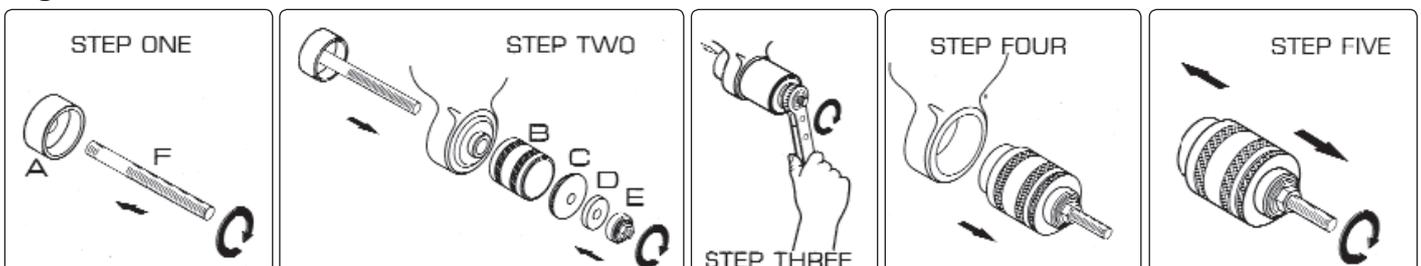


2.1. REMOVING A BUSH.

Refer to Fig.2:

- 2.1.1. Screw the threaded bar F into the bush removal cup A and insert the threaded bar into the bush to be removed from the vehicle rear trailing arm bush-mounting (Step one).
- 2.1.2. Locate components B, C, D and E on threaded bar F (Step two).
- 2.1.3. Using a ring spanner, or ratchet wrench, tighten nut E (Step three) until the bush is clear of the vehicle rear trailing arm and located in component B (Step four).
- 2.1.4. Remove the bush from component B by unscrewing the bush removal cup A and components C, D and E from the threaded bar F (Step 5).
- 2.1.5. Replace all the components comprising the bush replacement tool in the appropriate slots in the carrying case (Fig.4).

Fig.3

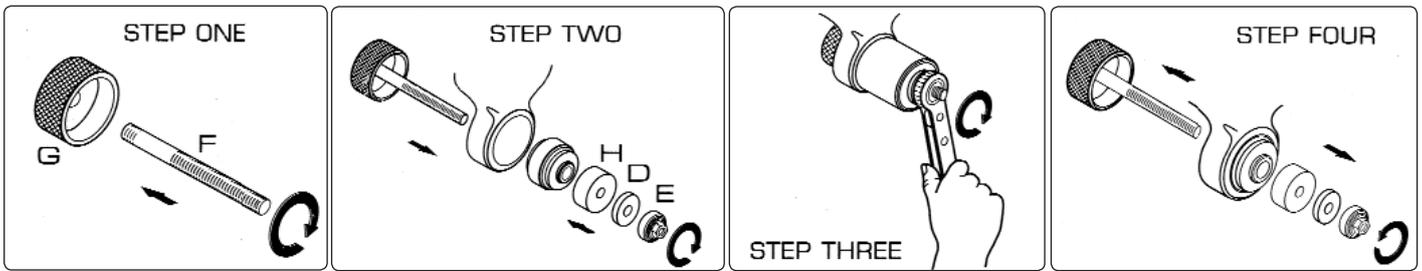

3.1. REPLACING A BUSH

Refer to Fig.3:

- 3.1.1. Screw the threaded bar **F** into the bush insertion cup **G**. Hold the cup against the outer face of the trailing arm, so that the threaded bar protrudes through the bush seating. Slide the bush on to the threaded bar **F** (Step one).
- 3.1.2. Locate components **H**, **D** and **E** on threaded bar **F** (Step two).
- 3.1.3. Using a ring spanner, or ratchet wrench, tighten nut **E** (Step three) until the bush is pressed into the vehicle rear trailing arm.
- 3.1.4. Unscrew the bush insertion cup **G**. Remove the threaded bar **F** from the bush mounting and components **H**, **D** and **E** from the threaded bar **F** (Step four).
- 3.1.5. Replace all the components comprising the bush replacement tool in the appropriate slots in the carrying case (Fig.4).



Fig.4

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.