



INSTRUCTIONS FOR:  
**3.6V LI-ION CORDLESS  
SCREWDRIVER SET - 46PC**  
MODEL No: **CP36S**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



**IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.**

## 1. SAFETY INSTRUCTIONS

### 1.1. GENERAL SAFETY

- ✓ Maintain the screwdriver in good condition. Check moving parts alignment on a regular basis.
- ✓ Keep the screwdriver and charger clean for best and safest performance.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings and other loose jewellery and contain long hair.
- ✓ Secure loose workpieces with a clamp, vice or other adequate holding device.
- ✓ Avoid unintentional starting.
- ✓ Wear approved safety eye protection.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Be aware that this screwdriver does not need to be plugged into the mains power.
- ✓ Keep children and unauthorised persons away from the working area.
- x **DO NOT** allow children to operate the screwdriver.
- x **DO NOT** hold unsecured workpiece in your hand.
- x **DO NOT** carry the screwdriver with your finger on the trigger.
- x **DO NOT** use the screwdriver for a task it is not designed for.
- x **DO NOT** operate the screwdriver when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- x **DO NOT** get the screwdriver or battery charger wet or use in damp or wet locations.
- ✓ Keep screwdriver and charger in a safe, dry, child proof area where the temperature will not exceed 104°F (40°C).

### 1.2. ELECTRICAL SAFETY FOR USE OF CHARGER.

**USE ONLY THE SUPPLIED CHARGER PLUG FOR CONNECTING SCREWDRIVER TO THE POWER SUPPLY.**

- WARNING!** It is the user's responsibility to read, understand and comply with the following electrical instructions: You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB. You must also read and understand the following instructions concerning electrical safety.
- 1.2.1. **The Electricity At Work Act 1989** requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- 1.2.2. **The Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. **If in any doubt about electrical safety, contact a qualified electrician.**
- 1.2.3. **You must ensure that you:**
  - ✓ Inspect the charger plug, cable and connector for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged **DO NOT** use.
  - ✓ **Important:** Check that the voltage marked on the charger plug is the same as the power supply to be used.
  - x **DO NOT** pull the charger plug from the mains socket by the lead.
  - x **DO NOT** use any other type of charger with this product.
  - x **DO NOT** try to take the charger plug apart.
  - x **DO NOT** use the charger plug to charge or power any other electrical item.
  - x **DO NOT** get the charger wet, or use in wet, damp conditions (for indoor use only).
  - WARNING! NEVER** substitute a standard 13amp 3 pin plug, or any other type of plug, for the charger plug.

### 1.3. BATTERY SAFETY

- WARNING!** To reduce the risk of burns or fire:
  - x **DO NOT** attempt to open, disassemble, modify or service the battery pack.
  - x **DO NOT** crush, puncture, short external contacts or dispose of in fire or water.
  - x **DO NOT** expose to temperatures above 60°C (140°).
- ✓ Recycle or dispose of used battery as stipulated by local regulation.

## 2. INTRODUCTION AND SPECIFICATION

Powerful lightweight screwdriver featuring locking swivel adjustment from pistol to straight type. Forward, reverse and trigger-lock control. Adjustable torque with up to 6 settings. 6mm quick-release bit holder. Integral LED light to illuminate working area. Powered by a lithium-ion battery which maintains a high energy density level and has no memory effect, lasting for longer periods of time than traditional Ni-Cd cells and will recover from a deep discharge state with no tendency to reduce overall capacity. Three LED's indicate battery life. Soft-grip handle for comfort and control. Supplied in a carry-case with accessories.

**No-Load Speed: . . 0-200rpm**  
**Noise Power . . . . . 62dB.A**  
**Noise Pressure . . . 72dB.A**

**Maximum Torque: 3.5Nm**  
**Charging Time: . . . 3-5 Hours**

#### Contents:

Charging Unit, Magnetic Bit Holder, Socket Adaptor.

Screwdriver Bits: Slotted - 3, 4, 5, 6, 7mm, Phillips - #0, #1, #2, #3, Pozi - #0, #1, #2, #3, Hex - 2, 2.5, 3, 3.5, 4, 5, 6mm

TRX - T10, T15, T20, T25, T27, T30, T40, T45, Sockets - 6, 7, 8, 9, 10, 11, 12, 13mm, 55mm.

Screwdriver Bits: Slotted - 4, 6mm, Phillips - #0, #2, Drill Bits - 1.5, 3mm.



*Original Language Version*

### 3. OPERATION

#### ❑ IMPORTANT WARRANTY INFORMATION:

The battery fitted to this cordless tool is considered to be a consumable item and its ability to accept charge will reduce over time. We will warranty it against mechanical and electrical defect for a period of one year - this does not cover fair wear and tear. If the battery is not properly charged before first use, or regularly conditioned, its capacity will diminish. Under these circumstances we will not replace the battery even if it is less than one year old.

- 3.1. To charge the screwdriver, insert the charger jack into the charging socket on the screwdriver (fig.1) and plug the charger into a mains socket.
- 3.2. The red LED will illuminate to indicate the battery is being charged. When charging is complete, unplug the charger from the mains and the screwdriver.
- 3.3. Place a bit into the bit holder of the screwdriver. Select the required direction by using the reverse switch (which will lock the screwdriver in it's central position) and squeeze the power trigger to start the screwdriver.
- 3.4. If the work area is dark, press the LED switch on the side of the screwdriver to activate the LED worklight (fig.2).
- 3.5. To check the condition of the battery, press and hold down the battery indicator button next to the battery level indicator (fig.1). If all LEDs illuminate, there is sufficient charge, if just the yellow and red LEDs illuminate, the screwdriver will soon need charging, if just the red LED illuminates, the screwdriver needs to be charged immediately.
- 3.6. To change the position of the handle, press the handle release and turn the handle around 180° until it clicks into position.
- 3.7. To select torque or drill setting, twist the torque selector around to the required setting - from 1 (the lowest) to 6 (the highest) for torque setting or to the drill symbol for drilling.
- 3.8. When finished working, remove the bit from the bit holder, pulling back the quick release bit holder if needed. Clean the screwdriver and replace all parts in the storage case. Store the case in a safe, dry, child proof location.

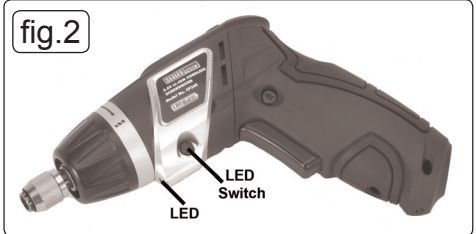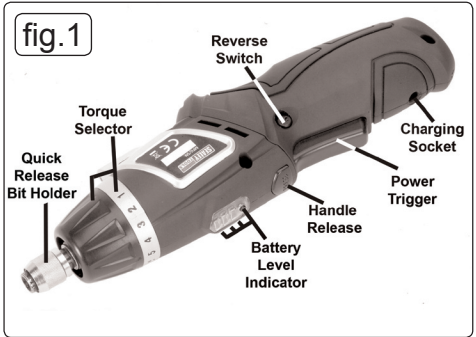

### Risk of Hand Arm Vibration Injury

3.6V Li-ion cordless screwdriver set Model No. CP36S when operated in accordance with these instructions and tested in accordance with BS EN 28662-1:1993, ISO 8662-1:1988 and BS EN ISO 8662-7:1997 results in the following vibration emission declared in accordance with BS EN 12096:1996.

**Measured vibration emission value:** 0.153m/s<sup>2</sup>    **Uncertainty:** 0.06m/s<sup>2</sup>

These values are suitable for comparison with emission levels of other tools that have been subject to the same test.

**This tool may cause hand-arm vibration syndrome if its use is inadequately managed.**

This is a 'NO LOAD' vibration figure.

A competent person should carry out a risk assessment following HSE guidelines.

Measurement results can be highly variable, depending on many factors, including the operator's technique, the condition of the work equipment, the material being processed and the measurement method.

**Recommended Measures to reduce risk of hand-arm vibration syndrome:**

We recommend appropriate safety equipment is utilised and regular breaks for the operator are employed to reduce any residual risk of fatigue or repetitive strain injury.

#### Environmental Protection.



Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycle centre and disposed of in a manner which is compatible with the environment.



When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



Li-Ion

#### Battery Removal.

Undo the 5 cross head screws in the handle, and split the 2 halves of the handle revealing the battery compartment. Remove the battery by cutting the wires. Dispose of the battery according to local authority guidelines.

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme.

Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim.

**INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,  
Kempton Way, Suffolk Business Park,  
Bury St. Edmunds, Suffolk,  
IP32 7AR

☎ 01284 757500

☎ 01284 703534



www.sealey.co.uk

sales@sealey.co.uk