



RECHARGEABLE FLEXIBLE UNDER-BONNET LIGHT 10W COB LED, 1600LM

MODEL NO: **LED142**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY

1.1. GENERAL

It is the user's responsibility to read, understand and comply with the following electrical instructions:

- ✓ Inspect the cable and connector for wear and damage to ensure items are safe before connecting to the power supply. If worn or damaged **DO NOT** use.
- ✓ Ensure the light is fully charged before initial use.
- ✗ **DO NOT** charge in damp conditions.
- ✗ **DO NOT** turn the light on when it is being charged.
- ✗ **DO NOT** shine directly into your, another person's or an animal's eyes.
- ✗ **DO NOT** allow children to use the light.
- ✗ **DO NOT** handle or move the light whilst it is being charged.
- ✗ **DO NOT** use the light if you suspect that the battery or the light casing is damaged.
- ✗ **DO NOT** leave battery in a discharged state, recharge battery immediately. Before storage, fully recharge the battery, subsequently recharge the battery at least once every six months of non-use.
- ✓ Recycle or dispose of used battery as stipulated by local regulation.

1.2. BATTERY SAFETY

- ☐ **WARNING!** To reduce the risk of burns or fire:
 - ✗ **DO NOT** attempt to open, disassemble, modify or service the battery pack.
 - ✗ **DO NOT** crush, puncture, short external contacts or dispose of in fire or water.
 - ✗ **DO NOT** expose to temperatures above 60°C (140°).
- ✓ Replace only with the battery pack designated for this product.
- ✓ Recycle or dispose of used battery as stipulated by local regulation.
- ✓ If the electrolyte in the cells gets on your skin, thoroughly wash with soap and water. If it gets in your eyes, rinse thoroughly with cool water and seek immediate medical attention.

2. INTRODUCTION

Super bright 10W COB LED produces up to 1600 lumens with a wide spread of light, illuminating the whole work area. Includes interchangeable hooks, one set of short hooks with 360° of rotation and silicone bands with foam covered hooks to prevent damage to paintwork. Silicone bands stretch from 1.35-1.7m. Light band is bendable to best position light in any situation. Includes an additional 150° of rotation at either side of the band. Both sides of the light band feature covered magnets that allow the light to be attached to a bonnet without the detachable silicone hooks or rotating hooks. 2 x 3.7V 2Ah Lithium-ion battery for extended battery life with a long run time of 3.5 hours at 1600lm. Easy-to-read charge indicator displays the battery level during use and while charging. Charges via a USB Type-C cable (supplied).


3. SPECIFICATION

Model No:	LED142
Battery:	2 x 3.7V 2Ah Li-ion Battery (14.7Wh)
Charging Time:	3hr
IP Rating:	IP54
LED Type:	COB
Lumen Output:	High/Low: 1600/800lm

Minimum/Maximum Width:	1350-1700mm
Nett Weight:	0.45kg
Operating Time:	High/Low: 3/6hr
Power:	10W

4. FEATURES

1	Power Switch.	4	Flexible LED light.
2	3.7V 2Ah Charge Socket.	5	Short Hooks.
3	Swivel adjustment.	6	Flexible Straps.

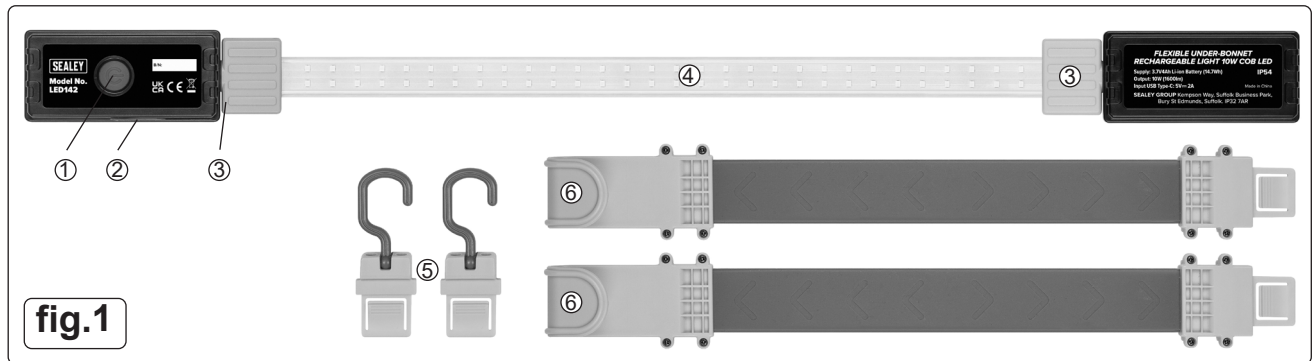

5. CHARGING


- ❑ **WARNING!** The battery fitted to this lamp is considered to be a consumable item and its ability to accept charge will reduce over time. We will warranty it against mechanical and electrical defect for a period of one year, this does not cover fair wear and tear. If the battery is not properly charged before first use, or regularly conditioned, its capacity will diminish. Under these circumstances we will not replace the battery even if it is less than one year old.
- 5.1. Connect the charger cable into the charging port on the lamp, see fig.1. Plug into power supply and turn on, the charge LEDs on the lamp will light as the battery charges. When fully charged all four green lamps will go out.
- 5.2. When the battery has fully charged disconnect from mains supply.
NOTE: The Lithium battery does not suffer from memory effect.

6. ASSEMBLY

- 6.1. Clip the ends of the hooks or flexible straps into either end of the LED lamp. See fig.2.

7. OPERATION

- 7.1. Place the hook at the end of the lamp over one edge of the bonnet and gently pull the other hook towards the other side of the bonnet.
- 7.2. Steady the lamp with one hand, whilst extending the hook over the other side of the bonnet.
- 7.3. Rotate the lamp to provide best illumination of work being undertaken.
- 7.4. To use the lamp, scroll through the two settings using the on/off switch above the power socket. Press once for 50% output, once more for 100% output, and press to turn lamp off. The charge status LEDs will light when the on/off switch is pressed or whilst charging.

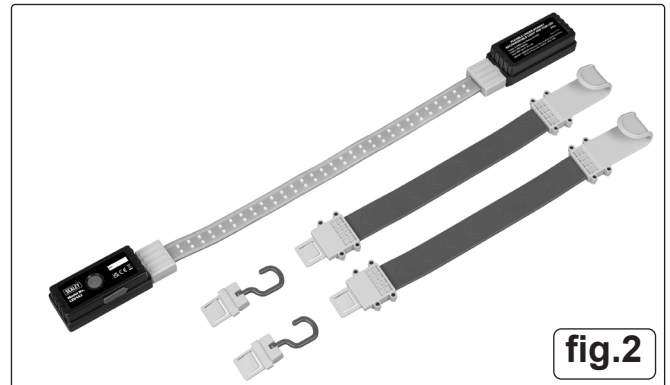

8. MAINTENANCE

- 8.1. Keep lamp clean and check for damage before every use. If damage is observed, remove from use until unit is repaired.
 - ✖ **DO NOT** use solvents to clean lamp.
 - 8.1.1. Store lamp in a dry, childproof area.



BATTERY REMOVAL

Remove the screws in the black section of the lamp control section to remove the batteries.

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk