

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY

1.1. ELECTRICAL SAFETY.

- WARNING!** It is the user's responsibility to read, understand and comply as follows. You must check all electrical equipment and appliances to ensure they are safe before using. You must inspect power supply leads, plugs and all electrical connections for wear and damage. You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products. It is particularly important to use an RCD together with portable products that are plugged into an electrical supply not protected by an RCCB.

If in doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer. You must also read and understand the following instructions concerning electrical safety.

- 1.1.1. The Electricity At Work Act 1989 requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- 1.1.2. The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of the appliance, and the safety of the appliance operator. If in doubt about electrical safety, contact a qualified electrician.
- 1.1.3. Ensure the insulation on all cables and the product itself is safe before connecting to the mains power supply. See 1.1.1. & 1.1.2. above and use a Portable Appliance Tester (PAT).
- 1.1.4. Ensure that cables are always protected against short circuit and overload.
- 1.1.5. Regularly inspect power supply, leads and plugs for wear and damage and inspect connections to ensure that none is loose.
- 1.1.6. Important: Ensure the voltage marked on the product is the same as the electrical power supply to be used, and check that plugs are fitted with the correct capacity fuse. A 13 amp plug may require a fuse smaller than 13 amps for certain products (subject to 1.1.10. below) see fuse rating at right.
- 1.1.7. **DO NOT** pull or carry the powered appliance by its power supply lead.
- 1.1.8. **DO NOT** pull power plugs from sockets by the power cable.
- 1.1.9. **DO NOT** use worn or damaged leads, plugs or connections.

Immediately replace or have repaired by a qualified electrician.

A U.K. 3 pin plug with ASTA/BS approval is fitted. In case of damage, cut off and fit a new plug according to the following instructions (discard old plug safely). (UK only - see diagram at right).


Ensure the unit is correctly earthed via a three-pin plug.

a) **Connect the green/yellow earth wire to the earth terminal 'E'.**

b) **Connect the brown live wire to live terminal 'L'.**

c) **Connect the blue neutral wire to the neutral terminal 'N'.**

d) After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable outer insulation extends beyond the cable restraint and that the restraint is tight.


Double insulated products are fitted with live (BROWN) and neutral (BLUE) wires only. Double insulated products are always marked with this symbol . To re-wire, connect the brown and blue wires as indicated above.

DO NOT connect the brown or blue to the earth terminal.

- 1.1.10. Cable extension reels. When a cable extension reel is used it should be fully unwound before connection. A cable reel with an RCD fitted is recommended since any product which is plugged into the cable reel will be protected.

1.2. GENERAL SAFETY

- WARNING!** Disconnect lamp from mains power before changing bulb or performing any maintenance.
- ✓ Replace or repair damaged parts. Use genuine Sealey parts only. Non-authorised parts may be dangerous and will invalidate the warranty.
- ✓ Maintain the lamp in good condition.
- ✗ **DO NOT** use the lamp if damaged.
- ✗ **DO NOT** use lamp close to paint fumes, solvents or other flammable liquids or flammable waste, such as wipes or cleaning rags.
- ✗ **DO NOT** fit a bulb larger than 100 watts.
- ✓ When not in use switch off the lamp and remove plug from power supply.
- ✓ Remember that the wire guard will be hot during and after use.
- ✓ Use gripper on secure, non-flammable supports only.

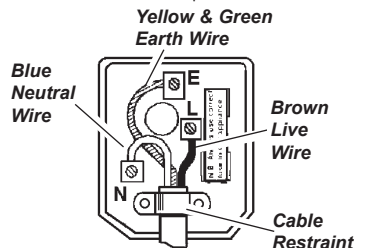

FUSE RATING
THIS PRODUCT MUST BE
FITTED WITH A
3 AMP FUSE

2. SPECIFICATION

Composite tough construction, features unique spring loaded mechanism incorporated into handle. Two red rubber covered pads help prevent accidental damage to gripped surfaces. Bulb mounted in ceramic holder and protected by metal grille giving safe, directional light. Supplied with 5mtr cable and BS approved plug.

Model No ML100G
Voltage 230V
Power 100W
Bulb Included No
Bulb Fitting ES
Cable Length 5mtr
Fitted Plug Yes
Bulb Model No BS60
Overall Length 300mm

3. USE

3.1. Gripper

3.1.1. Squeeze jaw to open the gripper. **DO NOT** attach gripper to anything that might break under its pressure.


3.2. Bulb (not supplied)

3.2.1. To replace bulb, release end cover and remove the glass bulb cover.

☐ **WARNING! The wire guard and bulb will be very hot during and after use.**

3.2.2. Edison screw bulb, 230V, 100 watt max. - to remove, screw bulb anti-clockwise, to replace screw clockwise. **DO NOT** attempt to remove bulb directly after use, the bulb will be hot.

3.2.3. Replace glass bulb cover and grille end cover, ensure the rubber stops sit firmly on the bulb cover.

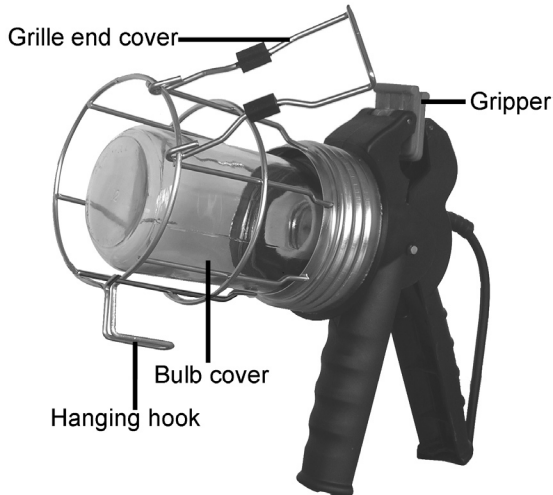

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR

☎ 01284 757500



www.sealey.co.uk



01284 703534



sales@sealey.co.uk