



48W SOLDERING STATION

MODEL NO: **SD008**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Indoor use only




Hot surfaces

1. SAFETY

1.1. ELECTRICAL SAFETY

- WARNING!** It is the responsibility of the owner and the operator to read, understand and comply with the following:
You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. You must also read and understand the following instructions concerning electrical safety.
- ✓ Ensure that cables are always protected against short circuit and overload.
- ✓ Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none are loose.
- ✓ Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating at right.
- ✗ **DO NOT** use worn or damaged cables, plugs or connectors. Have any faulty item repaired or replaced immediately by a competent electrician.
- ✓ It is recommended that this device is wired directly to a fused isolator switch. If, however, a plug is fitted, the following applies:
- ✓ Fit a new plug according to the following instructions (UK only).
 - a) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
 - b) Connect the BROWN live wire to the live terminal 'L'.
 - c) Connect the BLUE neutral wire to the neutral terminal 'N'.
 - d) After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable restraint is tight.

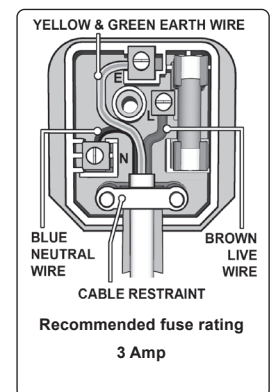

1.2. GENERAL SAFETY

- WARNING!** Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- ✓ Familiarise yourself with the application, limitations and potential hazards of the soldering station.
- ✓ Replace or repair damaged parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.
- ✓ Locate soldering station in a suitable working area, keep area clean and tidy and free from unrelated materials.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep the soldering iron clean for best and safest performance.
- ✓ Ensure there are no flammable or combustible materials near the work area.
- ✓ Wear approved safety eye protection (standard spectacles are not adequate).
- ✓ Wear appropriate protective clothing.
- ✓ Ensure the workpiece is adequately held before operating the soldering iron.
- ✓ Always replace the soldering iron in its holder when not in use.
- ✓ Remove excess solder from the soldering iron by wiping the tip on a damp, natural sponge; not by abrupt force.
- ✗ **DO NOT** attempt to remove excess solder from the soldering iron by shaking it. Hot solder may become airborne and land on skin causing burns and blisters.
- ✗ **DO NOT** allow children or pets into the area where the soldering is taking place.
- ✗ **DO NOT** attempt to cool the soldering iron with water.
- NOTE:** This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

2. INTRODUCTION

48W Soldering station with rapid heat up. Variable temperature control. Maintains temperatures between 160-480°C. Supplied with a metal soldering iron stand, tip sponge, replaceable tip.

3. SPECIFICATION

MODEL NO:.....SD008
Electrical Plug Type:3-Pin BS
Frequency:.....50Hz
Heating Element Voltage:.....230V AC
Power:.....48W

4. OPERATION

- 4.1. Unpack the soldering station and check all parts. Damaged parts must not be put into operation.
- 4.2. Put the holding rack for the soldering iron sideways in the soldering station, wet the cleaning sponge in the sponge rack with water.
- 4.3. Put the soldering iron in the holding rack.
- 4.4. Place the soldering station on a solid and dry surface.
- 4.5. Connect the mains supply and turn on the soldering station by using the power switch (I=ON/O=OFF).When turned on, the power switch is lit.
- 4.6. Always put the soldering iron on the holding rack when it is heating up or during breaks from soldering.
- 4.7. Make sure the workbench for soldering is clean.
- 4.8. Only use solder for electronics. Acidic solder can damage the soldering tip or the work piece.
- 4.9. Regulate the desired temperature of the soldering iron with the adjusting knob.
- 4.10. The colour-coded areas are equal to following temperatures:
Yellow ≥ 160°C
Light Orange 180°C to 350°C
Deep Orange 350°C to 450°C
Red ≥ 550°C
- 4.11. Lower the temperature during breaks, this saves energy and extends the durability of the soldering tip.
- 4.12. Wait for about 10 minutes until the soldering tip reaches the setting temperature, test the temperature by touching the soldering tip with solder. If the solder melts away easily, start soldering.
- 4.13. Tin the hot soldering tip with solder; wipe off excessive solder on the wet cleaning sponge.
- 4.14. Heat up the to-be-soldered part with the soldering tip and add solder.
- 4.15. Wait for the hot solder to cool down.
- 4.16. Clean the soldering tip on the wet sponge after each soldering.
- 4.17. After the soldering is done, put back the soldering iron in the rack and turn off the soldering Station at the main switch.
- 4.18. **DO NOT** file off the soldering tip, or it will be damaged.
- 4.19. Never touch the hot soldering tip.
- 4.20. Let the soldering iron cool down after use.
- 4.21. The soldering iron should not be dunked into water.
- 4.22. During breaks, the soldering iron must be placed in the holding rack.

5. MAINTENANCE

- 5.1. This tool must be placed on its stand when not in use.
- 5.2. If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid hazards.
- 5.3. **GENERAL CLEANING**
 - 5.3.1. The outer case of the iron or station may be cleaned with a damp cloth using small amounts of liquid detergent Never submerge the unit in liquid or allow any liquid to enter the housing. Never use solvent to clean the case.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk