



14PC 3.7V LITHIUM-ION QUICK SELECT CORDLESS SCREWDRIVER

MODEL NO: **CP36MS.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



wear eye protection

1. SAFETY

1.1. GENERAL SAFETY

- ✓ Maintain the screwdriver in good condition. Check moving parts alignment on a regular basis
- ✓ Keep the screwdriver clean for best and safest performance.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings and other loose jewellery and contain long hair.
- ✓ Secure loose workpieces with a clamp, vice or other adequate holding device.
- ✓ Avoid unintentional starting.
- ✓ Wear approved safety eye protection.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Keep children and unauthorised persons away from the working area.
- ✗ **DO NOT** allow children to operate the screwdriver.
- ✗ **DO NOT** hold unsecured workpiece in your hand.
- ✗ **DO NOT** carry the screwdriver with your finger on the trigger.
- ✗ **DO NOT** use the screwdriver for a task it is not designed for.
- ✗ **DO NOT** operate the screwdriver when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✗ **DO NOT** get the screwdriver wet or use in damp or wet locations.
- ✓ Keep screwdriver in a safe, dry, child proof area where the temperature will not exceed 104°F (40°C).
- ✓ **BATTERY SAFETY**
- **WARNING!** To reduce the risk of burns or fire:
 - ✗ **DO NOT** attempt to open, dismantle, modify or service the battery pack.
 - ✗ **DO NOT** crush, puncture, short external contacts or dispose of in fire or water.
 - ✗ **DO NOT** expose to temperatures above 60°C (140°).

2. INTRODUCTION

Compact, lightweight and comfortable to use. Quick bit selection combined with six bit magazine storage system means choosing the right bit couldn't be easier. Forward, reverse and trigger-lock with soft grip handle. Features LED work light and three colour battery indicator. Supplied with 12 bits in two magazines and pin charging cable.

3. SPECIFICATION

Model No.:.....**CP36MS.V2**
 Battery:3.7V 1.3Ah Li-ion
 Charging time:.....3-5hr
 No-Load Speed.....0-230rpm
 Max. Torque:4.5Nm
 Contents:.....Screwdriver Bits; Slotted - 3, 4, 5mm, Philips - #1, #2, #3, Pozi - #1, #2, #3, TRX-Star* - T10, T15, T20



4. OPERATION

4.1. CHARGING

- 4.1.1. Plug the charge lead into the micro pin port (fig.1).
- 4.1.2. Connect the charge lead into a suitable power supply.
- 4.1.3. When charging commences, the charge indicator will light.
- 4.1.4. As the charge builds, the LEDs will light in sequence until the green shows, denoting a full charge. The amber LED represents mid-charge.
- 4.1.5. When fully charged, remove the charger lead from the screwdriver and the power outlet.

4.2. CHARGE LEVEL

- 4.2.1. When the tool is operated, the display shows the charge level: full charge is shown by all three LEDs being lit. The number of lit LEDs reduces with the charge level. When just the red shows, the tool requires recharging as in section 4.1.

4.3. OPERATION

- 4.3.1. Pressing the trigger (fig.1) will actuate the screwdriver. Sliding the forward /reverse selector will change the direction of rotation.
- 4.3.2. Pressing the trigger will also switch the LED worklight on.


4.4. CHANGING BITS

- 4.4.1. The CP36MS is supplied with two magazines containing screwdriver bits. To change a bit which is contained in the fitted magazine, pull the magazine carrier forward (fig.2) and rotate the magazine until the required bit is at the top. The bit to be loaded may be viewed through the magazine viewer.
- 4.4.2. To load the chosen bit, pull the magazine carrier back toward the handle.
- 4.4.3. To change the magazine, pull the magazine carrier forward and push the magazine to the left until it hangs below the screwdriver then pull the magazine forward until released from the spindle (fig.3).
- 4.4.4. Place the alternative magazine on the spindle and swing it back into the magazine carrier.
- 4.4.5. Push the magazine carrier back as in 4.4.2.

fig.2



fig.3

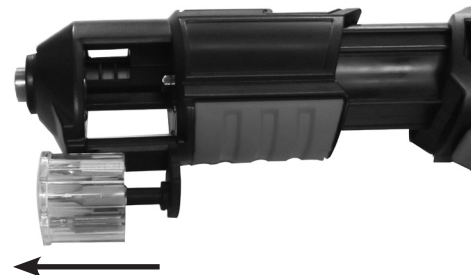

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk