

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

1. SAFETY INSTRUCTIONS

1.1 GENERAL SAFETY

- ✓ Maintain the screwdriver in good condition. Check moving parts alignment on a regular basis.
- ✓ Keep the screwdriver and charger clean for best and safest performance.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings and other loose jewellery and contain long hair.
- ✓ Secure loose workpieces with a clamp, vice or other adequate holding device.
- ✓ Avoid unintentional starting.
- ✓ Wear approved safety eye protection.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Be aware that this screwdriver does not need to be plugged into the mains power.
- ✓ Keep children and unauthorised persons away from the working area.
- x DO NOT allow children to operate the screwdriver.
- x DO NOT hold unsecured workpiece in your hand.
- x DO NOT carry the screwdriver with your finger on the trigger.
- x DO NOT use the screwdriver for a task it is not designed for.
- x DO NOT operate the screwdriver when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- x DO NOT get the screwdriver or battery charger wet or use in damp or wet locations.
- ✓ Keep screwdriver and charger in a safe, dry, childproof area where the temperature will not exceed 104°F (40°C).

1.2 ELECTRICAL SAFETY FOR USE OF CHARGER.

USE ONLY THE SUPPLIED CHARGER PLUG FOR CONNECTING TORCH TO THE POWER SUPPLY.

- **WARNING!** It is the user's responsibility to read, understand and comply with the following electrical instructions: You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB.

You must also read and understand the following instructions concerning electrical safety.

1.2.1. The Electricity At Work Act 1989 requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.

1.2.2. The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. **If in any doubt about electrical safety, contact a qualified electrician.**

1.2.3. You must ensure that you:

- ✓ Inspect the charger plug, cable and connector for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged **DO NOT** use.
- ✓ Important: Check that the voltage marked on the charger plug is the same as the power supply to be used.
- x **DO NOT** pull the charger plug from the mains socket by the lead.

- x **DO NOT** use any other type of charger with this product.
- x **DO NOT** try to take the charger plug apart.
- x **DO NOT** use the charger plug to charge or power any other electrical item.
- x **DO NOT** get the charger wet, or use in wet, damp conditions (for indoor use only).
- **WARNING! NEVER** substitute a standard 13amp 3 pin plug, or any other type of plug, for the charger plug.

2. INTRODUCTION AND SPECIFICATION

Lightweight cordless power screwdriver with forward and reverse both developing 2.5Nm of torque. Built-in LED work light to enhance vision in dark areas. Three colour LEDs to indicate battery life. Supplied with 17 bits. Recharges in 3-5 hours.

No Load Speed: 180rpm


Max Torque: 2.5Nm

Charge Time: 3 - 5Hours

Contents; Slotted - 3, 4, 5, 6, 7 x 24mm, Slotted - 3, 4, 5, 6 x 50mm, TRX-Star* - T10, T15, T20 x 24mm, Phillips - #1, #2, #3 x 24mm, Bit Adaptor, HSS Drill Bit 2mm, Cordless Screwdriver, Pouch.

3. OPERATION

- 3.1 To charge the screwdriver, plug the charger into the mains and insert the charger jack into the charging socket on the screwdriver (see fig.1)
- 3.2 The red LED will illuminate to indicate the battery is charging. Charge time: 3-5 hours.
- 3.3 Place a bit into the magnetic spindle of the screwdriver. Squeeze the trigger either at the top or bottom for reverse or forward use.
- 3.4 If work area is dark, slide the switch forward on the top of the screwdriver to activate the LED worklight
- 3.5 To check the battery life of the screwdriver press and hold down the battery indicator button (fig.1) if all LEDs illuminate there is sufficient charge, if just the yellow and red LEDs illuminate the screwdriver will soon need charging, if just the red LED illuminates the screwdriver needs to be charged immediately.

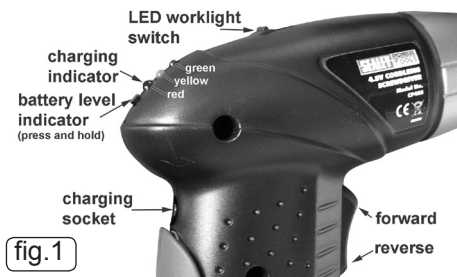

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

