

# T3 router

*The Trend T3 is a light duty plunge router specifically designed for the hobbyist or home craftsman*



Light but powerful, the Trend T3 router is not only a suitable starting point for those woodworkers new to routing, but offers the precision and ease of use required for many fine detailing and finishing applications. Fitted with a 550 watt motor and electronic variable speed control, the T3 router

is ideal for all general light duty applications around the home and workshop, not only on wood, but many involving the use of plastics, laminates and other materials. For safe keeping and storage, together with its accessories and router



The Trend T3 router can be used for light duty routing applications, including edge moulding, rebating, trimming and template work. The standard TBC base configuration allows the T3 to be fitted to most Trend jigs and accessories.



For template routing a 16mm diameter guide bush is supplied with the T3 router. Other diameter guide bushes are available from the standard Trend range, allowing the T3 to be used with jigs such as the DJ300 dovetail jig.



The body of the T3 router can be detached from the base unit to allow the T3 to be used as a hand-held carving or die grinding tool, using multi-flute burs or grindstones. Do not use standard router cutters for these applications.




Accessories supplied with the T3 router include a side-fence, dust extraction adaptor, a 16mm guide bush and 2 extra collets, a 6.3mm collet fitted to router and 6mm and 8mm alternatives. A spindle/body lock spanner is included as well as the collet nut spanner.




For fast repetitive applications, the T3 is fitted with a three-stage turret stop and graduated depth-gauge rod. The T3 will also accept optional accessories from the Trend T5 router range, such as the fine height adjuster.



The smooth plunge action on the T3 can be locked at the required cutting depth using the positive action lever lock. The cutting speed can be pre-set between 8000 and 24000rpm using the step-less dial on top of the router body. **IP**

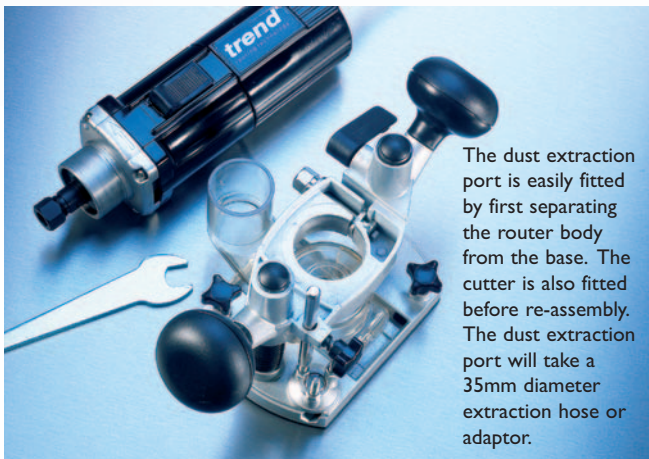

The dust extraction port is easily fitted by first separating the router body from the base. The cutter is also fitted before re-assembly. The dust extraction port will take a 35mm diameter extraction hose or adaptor.

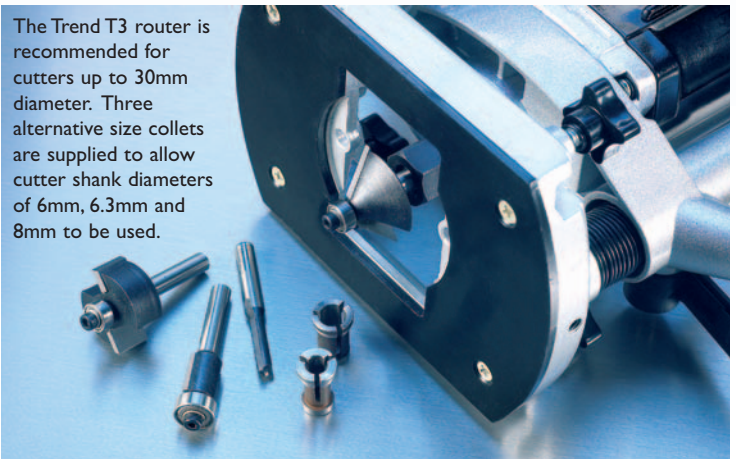

The Trend T3 router is recommended for cutters up to 30mm diameter. Three alternative size collets are supplied to allow cutter shank diameters of 6mm, 6.3mm and 8mm to be used.

## cutter set

Protected in a plastic carrying case, this value twelve piece set contains a range of the most widely used cutters for both decorative as well as constructional woodworking. The set contains two straight cutters of 6.3mm and 12.7mm diameter, a 3.2mm radius cove cutter, a V-groove cutter and a dovetail cutter. Seven bearing guided cutters are included, two rounding over cutters of 6.3mm and 9.5mm radius, a 45° chamfer cutter, a 12mm diameter flush trimming cutter, a 6.3mm radius edge cove cutter, rebate cutter and a decorative ogee moulding cutter. The set is available with either 1/4 inch or 8mm diameter shanks.

SET/SS8 \_\_\_\_\_ £19.95



## ROUTING KIT

**Includes:** T3EK Router \_\_\_\_\_ £39.95  
SS8 Cutter Set \_\_\_\_\_ £19.95

**KIT/T3/SS8**  
**£54.95**

