CATALOGUE 2008/9

50

ELECTROMC

ELON C

6

IMPORTANT INFORMATION

EW PRICES EFFECTIVE FROM 1ST FEBRUARY 2009

CRAFTERNIH

ROUTING & WOODWORKING

trend[®] routing technology

WELCOME to the 2008/9 Trend Catalogue

e have provided routing products, cutters, jigs and accessories to the woodworking market for over half a century. Today our catalogue includes 4000 precision engineered and innovative products, making it the largest range available worldwide.

To maintain our leading position in the Routing market, we constantly develop and improve our ranges. This catalogue includes over 100 new products highlighted on the following two pages. These include key products such as the T4 light duty plunge router; Airshield Pro powered respirator and T50 Impact Driver.

We are also aware of the need to develop our business to meet the changing needs of our customers and the business environment generally. Therefore, we are developing our website to provide easier accessibility to our products by our customers. This is expected to be ready by Autumn 2007.

This new catalogue launches our Environmental Campaign. We have made a partnership with 'Tree Appeal', an organisation that helps responsible organisations reduce their environmental footprint by planting native British broad-leaved trees in the UK and Tree Twinning projects in Africa. We have made a commitment to plant 2000 trees, so there will be a number of exciting Trend Tree Appeal campaigns in the near future.

We thank you for your support and will continue to ensure that you can count on us to offer high quality innovative products for all of your routing and woodworking needs.

We continually strive to provide outstanding service in sales, technical advice and delivery, therefore your continued feedback is vital to us in maintaining these levels of service.

Should you have any comments regarding the content of this catalogue then please do not hesitate to contact myself or one of my colleagues.

Jeff Willcocks Managing Director



For your nearest Stockist CALL FREE 0800 487363

or use our search engine

www.trend-uk.com/stockist

day delivery.



AVAILABLE WORLDWIDE

We have well established distributors worldwide. Please see our website for details. For assistance in obtaining our products overseas or for dealer



All our products are available

from stockists around the UK.

If your stockist does not have

the products you require in

stock, they can be supplied

through your stockist for next

enquiries, please contact Jan Hughes.

Tel: 00 44 (0) 1923 249911 Email: hughesj@trendm.co.uk



TECHNICAL SUPPORT

Our Technical Support team, staffed by experienced engineers and former tradesmen, is available for practical advice on cutter selection, setting-up, jig-making and routing techniques. They also offer a leading design service for tooling made to order for specific applications.

For Free Technical Support:

Tel: 00 44 (0) 1923 224681 (8.45am - 5.30pm Mon - Fri) Fax: 00 44 (0) 1923 228657 Email: technical@trendm.co.uk

Also available: INDUSTRIAL TOOLING CATALOGUE


Innovative products developed specifically for the Industrial Woodworking market.

TRADE CATALOGUE

Packed with woodworking solutions for the Professional Tradesman.

To order your free catalogues please visit www.trend-uk.com or call 0800 487363.



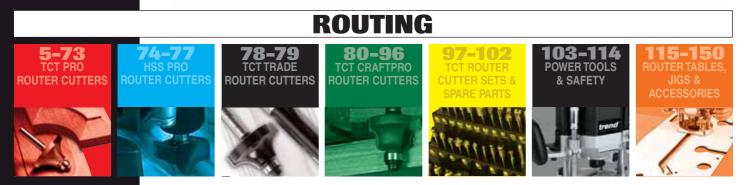

All prices are in Pounds Sterling & exclusive of VAT @ the current rate. Prices effective from 1st February 2009 until 31st December 2009.

Our Website

WITH NEW FEATURES

We have recently updated our website with improved navigation & comprehensive information on every product. All products will soon be available to buy on-line with a same day despatch.

Bookmark our site in your web browser & make a regular visit. For more details see page:

www.trend-uk.com



ENVIRONMENTAL STRATEGY

To celebrate the launch of the new Trend Catalogue, we have formed a partnership with Tree Appeal, which is an organisation working with Defra that plants broad leaved trees in the UK and also specific tree planting projects in Africa.

The philosophy of Tree Appeal is to plant and conserve trees within the UK in recognition and appreciation of the environmental and humanitarian benefits that trees deliver to the well being of our valuable planet. We have committed to planting 2000 trees in our first year of partnership and will be launching various campaigns in the near future to achieve that target.

For further information visit:

www.treeappeal.com







Suppliers Association.

Member of the Saw Doctors Association, the leading trade organisation which promotes excellence in the manufacture and supply of woodworking cutting tools.



OVER 100 NEW

TTE

Alle

117

wight



EXHIBITION & SHOWS For a list of diary dates on forthcoming open days and



ROUTING COURSES One or two day routing courses available, both basic and advanced. Full instruction provided on a wide range of Trend products. See page: 196

102

SAFETY



Before using Trend products please read the safety points

and information on page:

DVDs, VIDEOS, **BOOKS & CLOTHING**

Including details on our new routing book and DVD.



COMPATIBILITY CHART

Our large range of routing attachments, jigs and tools fit most makes of routing machines to maximise possible applications. See our compatibility chart on pages:



ww.trend-uk.com/compatibility



Consistently high standards are guaranteed by strict quality control procedures and inspection by our quality controllers. Our quality system is BS EN ISO 9001 registered to comply with international standards. Items described in standards. Items described in this catalogue may not necessarily be manufactured under a registered ISO 9001 management system.

WOODWORKING ACCESSORIES

www.trend-uk.com/courses





173-185 SNAPPY QUICK RELEASE **DRILL SYSTEM**



190-191 **MEASURING &** MARKING





ALPHABETICAL INDEX - BACK COVER

PRO CUTTERS

trend

EV

POWER

NEW

AIRSHIELD

NEW

The new improved

fully protected powered respirator. AIR/PR0 £219.00 SEE PAGE 112

PRO

A new range of Rotatip™ cutters for 1/4" collet routers. SEE PAGE 12-14

TOOLS

Γ4

T4EK

T50

Compact 12V

T50K

Cordless Impact

Driver with quick change chuck.

SEE PAGE 185

£169.00

Powerful 850W light duty plunge router with extra features.

SEE PAGE 108

NEW

£85.00



TRADE CUTTERS



CRAFTPRO CUTTERS



ROUTING JIGS

New worktop jig for use on bathroom & kitchen worktops.





The Mini Routabout routs access holes to pipes & cables.

M/RBT From £40.50 SEE PAGE 123

NEW

Jig for routing draining grooves in solid timber for Belfast type sinks.

DG/JIG £102.00 SEE PAGE



ROUTING ACCESSORIES


NEW



NEW

The new Door Stand securely holds the door while routing lock & hinge recesses.

D/STAND/A £36.00 SEE PAGE 133



D/CLAMP/A £17.00 SEE PAGE 133

Our new utility bag is ideal for transporting router & accessories.

 CASE/UBR
 £31.00

 SEE PAGE 146

SPINDLE TOOLING

EW

A range of new grooving heads, jointing & disposable insert cutter blocks.



SEE PAGES 154-155

SAWBLADES



Snappy

The Quick Release Drill System Four piece tool belt for tools & screwdriving accessories.

 SNAP/TB1/SET
 £42.00

 SEE PAGE 184

For transporting cordless drill, drilling & screwdriving tools.

SNAP/TOTE/1 £27.00 SEE PAGE 184

MEASURING & MARKING

The Multiscribe is a multi-functional tool for a variety of markingout applications.

NEW

 MS/PR0
 £31.50

 SEE PAGE 191

SHARPENING


New honing guide to achieve the correct angle on chisels & plane irons.

NEW

 DWS/HG/SET
 £37.50

 SEE PAGE 193

ROUTING BOOK





COMPLETE ROUTING by Alan Holtham is an essential read for both the amateur & the experienced router user.

BOOK/CR £21.00 SEE PAGE 195

TREND CUTTER RANGES

INDUSTRIAL **TOOLING CATALOGUE**

Our Industrial Tooling is a high quality, innovative range that has been developed specifically for the UK industrial woodworking market.

SAWBLADES

Unique quality long lasting Tungsten **Carbide Tipped saw** blades.



SPINDLE TOOLING

Tungsten Carbide multi profile cutter heads, brazed tip & disposable insert tooling.

DRILLING TOOLS

Micrograin Tungsten **Carbide Tipped** drilling tools, dowel drills & boring bits.

MACHINING

Wide range of profile straight machining router cutters using D-Namic carbide.



Phone 0800 487363 for your free Industrial Tooling Catalogue and details of your nearest stockist

TCT PRO ROUTER CUTTERS

For the most demanding applications in manufacturing & in the woodworking trades.

Our straights & trimmers use D-Namic Carbide that cuts up to twice further than its nearest competitor.

NAMIC Features:

1400 Lines Pages 5-73

- Advanced automated grinding improves the carbides resistance to wear.
- Up to 200% longer life when cutting abrasive materials.
- Cleaner cut than other existing carbides.
- Final results & life that makes it the most cost effective carbide today.
- Developed in conjunction with the world's leading carbide manufacturer & is exclusively available from Trend.

HSS PRO ROUTER CUTTERS Single piece high speed steel tooling. Range comprises of tools for softwood & for the window industry. Ground with a very fine edge for superior cut in softwood. Window Industry cutters for alloy & plastic **270 Lines** extrusions are made from super high speed Pages 74-77

TCT TRADE ROUTER CUTTERS

PTFE non-stick coated micrograin TCT router cutters designed for the tradesman.

- Microgranular TC tips with highly ground face for a superior finish.
- Extra long shanks.

steel.

Practical plastic tube storage cases.

100 Lines Pages 78-79

TCT CRAFTPRO ROUTER CUTTERS

Specially designed to meet the needs of the woodworker & tradesman for quality & performance.

- Microgranular Tungsten Carbide tips to ensure a perfect sharpness.
- Highly ground tip face to ensure it maintains its edge.
- PTFE non-stick coating on the body to minimise resin & heat build-up for longer life.
- Extra long shanks, ideal for router table use.

400 Lines Pages 80-96

PROFESSIONAL ROUTER CUTTERS





ROUTER CUTTER GRADES


Tungsten Carbide Tipped Cutters

This grade of cutter has Tungsten Carbide Tips brazed onto a steel body and is designed to cut the most abrasive materials. With careful handling, they will outlast HSS grade cutters by many times under normal conditions. Small sized cutters have a solid carbide insert.

Applications: Cutting, routing and profiling natural timbers, plywood, MDF, chipboard and abrasive plastics such as solid laminate and Coriane. EN847 Group HW

SIC/SC Solid Tungsten Carbide Cutters

These are turned, milled and ground from a solid piece of Tungsten Carbide and provide the greatest durability when used under stress load conditions. They also offer better plunge cutting characteristics than TCT and many more re-sharpenings can be obtained from STC tools. Furthermore, a harder grade of carbide is used as the tool is not being brazed. They have similar applications to TCT grade cutters. STC rasps can also be used on GRP. EN847 Group SC.

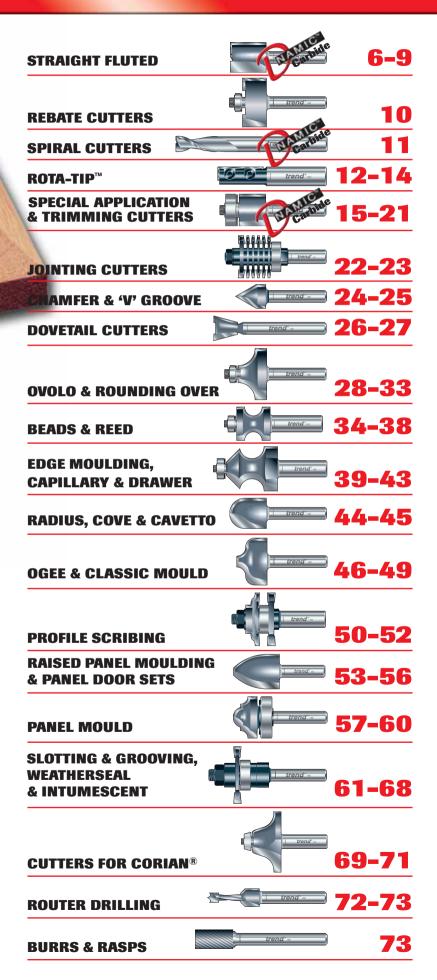

Ref. 3/81

trend

Ref. 4/2

trena

STRAIGHT FLUTED



- Use TCT for abrasive materials such as chipboard, MDF, plywood, hardwoods and hard plastics.
- Two flutes give a clean finish to the cut edges.
- All cutters are suitable for plunge routers unless stated.
- Cutters above and including 9.5mmØ, have TCT plunge centre tip.
- For cutters with extra long shanks, see 'Pocket Cutters' on page 8.

KEY TO PRODUCT REFERENCES


Prefix S = Solid Tungsten Carbide (STC).

Suffix D = Especially suited for drilling.

Suffix M = Short shank for Makita 3600B & 3612BR, Ryobi & Hitachi routers.

- ★ Solid Carbide insert. Handle small diameter cutters with care & take shallow passes.
- No centre TC tip, so not suitable for plunging abrasive materials.
- For use with Trend worktop jigs.
- Note Diameter dimensions shown in **bold** denote exact size.

NEW SIZES

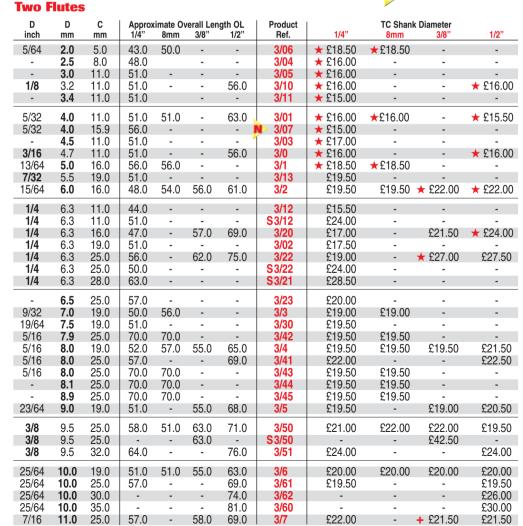

Δ

D

С

CARBIDE

router cutters

A new generation of extended life straight










tren<u>d</u>


D inch	D mm	C mm	Approx 1/4"	timate Ov 8mm	erall Leng 3/8"	gth OL 1/2"	Product Ref.	1/4"	TC Shank 8mm	Diameter 3/8"	1/2"
15/32	12.0	19.0	51.0	51.0	51.0	61.0	3/8	£21.50	£21.50	+ £21.50	£21.50
15/32	12.0	25.0	-	-	-	68.0	3/71	-	-	-	£20.00
15/32	12.0	32.0	65.0	-	-	73.0	3/74	£23.50	-	-	£23.50
15/32	12.0	38.0	-	-	-	80.0	3/72	-	-	-	£23.50
15/32	12.0	50.0	-		-	109.0	3/73	-	-	-	• £28.50
15/32	12.0	50.0	•	•	-	109.0	3/73D	-	-	•	£31.00
15/32 15/32	12.0 12.0	63.0 63.0	-	-	-	114.0 100.0	3/75 3/75M	-	-	-	£32.50 £34.00
	-			-	-	100.0			-	-	2.34.00
31/64	12.55	25.4	67.0	-	-	-	3/76	£23.50	-	-	-
1/2	12.7	19.0	51.0	-	-	-	3/80	£19.50	•	•	-
1/2	12.7	25.0	55.0	-	-	68.0	3/08	£20.00	-	-	£20.00
1/2 1/2	12.7 12.7	32.0 32.0	64.0 -	-	73.0	74.0 77.0	3/81 S3/81	£24.50 -	•	£29.00 -	£20.00 £61.50
1/2	12.7	32.0 37.0				79.0	3/82	-	-	-	£01.50 £27.50
1/2	12.7	50.0	-	-	-	108.0	3/83	-	-	-	We £27.00
1/2	12.7	50.0	-	-	-	99.0	3/83D	-			w £29.00
1/2	12.7	50.0	-	-	-	84.0	3/83M	-	-	-	We £29.00
1/2	12.7	63.0	-	-	-	115.0	3/85	-	-	-	We £34.00
33/64	13.0	20.0	52.0	-	-	-	3/9	£22.00	-		-
33/64	13.0	26.0	57.0	57.0	-	72.0	4/0	£31.00	£31.00	-	£31.00
35/64	14.0	25.0	56.0	-	-	67.0	4/01	£23.50	-	-	£23.50
35/64	14.0	50.0	-	-	-	95.0	4/03	-	-		£44.50
9/16	14.3	25.0	58.0	-	-	69.0	4/02	£26.00	-	-	£26.00
19/32	15.0	25.0	57.0	57.0	57.0	67.0	4/1	£33.50	£33.50	-	£33.50
19/32	15.0	35.0	-	-	-	76.0	4/04	-	-	-	£22.50
5/8	15.9	25.0	57.0		-	66.0	4/26	£31.50	-		£31.50
5/8	15.9	32.0	-	-	63.0	74.0	4/20	-	-	-	£26.50
5/8	15.9	37.0	-	-	70.0	79.0	4/21	-	-	-	£34.50
5/8	15.9	50.0	-	-	-	96.0	4/22	-	-	-	£38.00
5/8	15.9	63.0	-	-	-	105.0	4/24	-	-	•	£43.00
5/8	16.0	19.0	52.0	52.0	52.0	60.0	4/2	£21.50	£21.50	•	£25.50
43/64	17.0	25.0	54.0	-	-	65.0	4/25	£29.50	-	-	£29.50
45/64	18.0	25.0	57.0	57.0	-	67.0	4/29	£30.00	£28.00	-	£30.00
45/64	18.0	50.0	-	-	-	92.0	4/30	-	-	-	£42.00
23/32	18.2	21.0	53.0	-	53.0	62.0	4/4	£24.00	-	+ £25.00	£27.00
23/32	18.2	32.0	-	-	-	74.0	4/40	-	-	-	£36.00
3/4	19.1	25.0	58.0	58.0	60.0	67.0	4/5	£29.00	£29.00	+ £29.00	£29.00
3/4	19.1	37.0	-	-	-	79.0	4/50	-	-	-	£35.00
3/4	19.1	50.0	-	-	-	92.0	4/51	-	-	-	£38.50
3/4	19.1	63.0	-	-	-	105.0	4/52	-	-	-	£47.50
25/32	20.0	25.0	57.0	57.0	-	66.0	4/6	£32.50	£32.50	-	£32.50
53/64	21.0	19.0	50.0	-	-	59.0	4/62	£34.00	-	-	£34.00
55/64	22.0	19.0	50.0	50.0	-	57.0	4/60	£24.00	£24.00	-	£24.00
7/8	22.2	19.0	51.0	-	-	-	4/07	£26.00	-	-	-
7/8	22.2	31.0	-	-	64.0	73.0	4/7	-	-	-	£34.00
29/32 61/64	23.0 24.0	19.0 19.0	50.0 50.0	- 50.0	•	57.0 59.0	4/71 4/72	£33.00 £34.00	- £34.00	-	£33.00 £34.00
63/64	24.0 25.0	19.0 25.0	50.0 56.0	50.0 56.0	-	59.0 65.0	4/72	£34.00 £33.50	£34.00 £33.50		£34.00 £33.50
									200.00		
1	25.4	19.0	51.0	-	-	60.0	4/08	£31.50	-	-	£31.50
1	25.4	25.0	-	•	61.0	68.0	4/8	-	•	+ £33.50	£34.50
1	25.4	37.0	-	-	-	79.0	4/80	-	-	-	£43.00
1-1/32		25.0	-	-	-	65.0	4/82	-	-	-	£43.50
1-1/16		32.0	-	-	-	72.0	4/83	-	-	-	£45.50
1-7/64		25.0	•	•	•	66.0	4/85	-	•	•	£47.50
1-1/8 1-3/16	28.5 30.0	25.0	-	-	•	67.0 67.0	4/9 4/91	-	-	-	£47.50 £48.50
1-3/16	30.0 31.7	25.0 25.0	-	-	-	67.0 67.0	4/91	-	-	-	£48.50 £48.50
1-3/8	35.0	25.0	-	-		67.0	4/10	-			£48.50 £51.00
1-1/2	38.1	25.0	-	-	-	66.0	4/12	-	-	-	£59.00
1-37/64		25.0	-	-	-	66.0	4/92	-	•	•	£62.50
1-5/8 1-3/4	41.3 44.5	25.0 32.0	-	-	-	66.0 73.0	4/93 4/94	-	-	-	£56.00 £63.50
1-5/4	44.5	32.0	-		-	73.0	4/94	-	-	-	£65.00
1-31/32		25.0	-			63.0	4/96	-	-		£63.50
2	50.8	25.0	-	-	-	66.0	4/15	-	-		£65.00







PROFESSIONAL ROUTER CUTTERS











For acrylic cutters see page 15 for full details. For aluminium cutters see pages 76-77 for full details

trend

	('	/	
		いたのでいると思い	
_	_		_
			-
	_		
1.0	-		
_	-		
			4
	70	1	
			1
-	1.1	-27	
			_
	_	_	

HOW TO

ORDER

Please state:

Product Ref.

Shank Dia.

TC

Metric

3.2mm

6.35mm

9.5mm

12.7mm

Cans of Trendicote

Ref.

are

available to prevent resin build

up on cutters and sawblades

See page 189 for full details.

Imperial

1/8"

1/4"

3/8"

1/2"

Shank Dia

Conversi

For HSS

cutters

see page 74

Single Flute

- Eccentric single flute cutters.
- Cutters are chosen for fast free cutting, when cutting speed takes preference over finish.
- Cutters with prefix S are Solid Carbide.
 A Cutters of 2.0mm diameter and below should
- have a maximum of 1.0mm depth of cut per pass.
- Small diameter tools must be handled with care to avoid breakage.
- Single flute cutters should not be used in eccentric chucks.
- ★ These cutters have Solid Carbide inserts rather than brazed tips.


Rof 2//





Ret. 2/4	D inch	D mm	C mm	Product Ref.	1/4"	TC Shank Diame 8mm	ter 1/2"
	-	1.0	3.0	2/0	£15.00	£15.00	-
	-	1.5	6.0	2/01	★£17.50	-	-
	1/16	1.6	5.0	2/1	★ £21.50	-	-
	-	1.8	6.0	2/02	★ £19.00	-	-
	5/64	2.0	5.0	2/10	★ £18.50	★ £18.50	-
	7/64	2.7	8.0	2/12	★ £20.00	-	-
_		3.0	11.0	2/15	★ £21.00	★ £21.00	-
	1/8	3.2	8.0	2/2	★ £20.00	-	-
ע⊥קן	5/32	4.0	11.0	2/3	★ £15.50	-	★£15.50
<u> </u>	3/16	4.8	11.0	2/4	★ £20.50	-	-
D	3/16	4.8	19.0	2/40	-	-	★£31.00
Ref. 2/55	-	5.0	19.0	2/45	£25.50	-	-
	7/32	5.5	19.0	2/5	★£27.00	-	-
	-	6.0	19.0	2/55	£26.00	-	-
	1/4	6.3	10.0	S 2/6	£26.00	-	-
	1/4	6.3	12.7	2/06	£20.00	-	-
	1/4	6.3	19.0	S 2/60	£27.00	-	-
	1/4	6.3	19.0	2/6	£17.00	-	£17.00
	1/4	6.3	25.0	2/61	£23.00	-	-
	-	7.0	19.0	2/62	£26.50	-	-
Π	5/16	7.9	25.0	2/63	£22.50	-	£22.50
	3/8	9.5	25.0	2/7	-	-	£22.00
Бл	1/2	12.7	37.0	2/81	-	-	£25.50
ċ	1/2	12.7	50.0	2/82	-	-	£34.50
	5/8	15.9	32.0	2/83	-	-	£34.50

Solid Tungsten Carbide

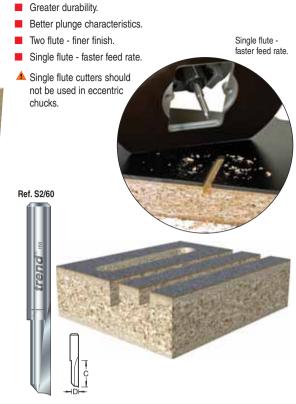

Single		•			01 I D'	
D inch	D mm	C mm	Product Ref.	1/4"	Shank Diam 3/8"	eter 1/2"
1/4	6.3	10.0	S2/6	£26.00	-	-
1/4	6.3	19.0	S2/60	£27.00	-	-
Two Fl	ute					
D	D	С	Product	STC	Shank Diam	eter
inch	mm	mm	Ref.	1/4"	3/8"	1/2'
1/4	6.3	11.0	S3/12	£24.00	-	-
1/4	6.3	25.0	S3/22	£24.00	-	-

S3/50

S3/81




Pocket Cutters

- Single and two flute cutters with extra long shanks.
- All the single flute tools & Refs. 3/20L, 3/55L & 3/84L have recessed shanks to allow deeper cutting.
- Deep grooving, rebating and mortising.
- Useful for template work when thickness of template restricts depth.
- Ref. 3/8L is suitable for use with Trend Hinge Jigs & Lock Jigs.
- Extra care must be taken to avoid breakage. Take more passes than usual, and only cut up to half the diameter of the cutter in one pass. This applies to cutters under 3/8" diameter.

trend





3/8

1/2



-

-

£42.50

-

£61.50

Single	Flute								
D	D	С	C2	OL	Product		TC Shank	Diameter	
inch	mm	mm	mm	mm	Ref.	1/4"	8mm	3/8"	1/2"
1/4	6.3	19.0	19.0	70.0	2/6L	£24.50	-	-	-
5/16	8.0	19.0	19.0	70.0	2/65L	-	-	£23.50	-
5/16	8.0	19.0	19.0	71.0	2/66L	-	-	-	£28.50
3/8	9.5	32.0	19.0	83.5	2/07L	-	-	£24.50	-

25.0

32.0

9.5

12.7


Two Fl	Two Flute										
1/4	6.3	19.0	19.0	70.0	3/20L	£23.00	-	-	-		
5/16	8.0	-	19.5	64.5	3/40L	£21.00	£21.00	-	-		
3/8	9.5	32.0	19.0	79.0	3/55L	-	£29.00	£25.50	-		
7/16	11.1	-	25.0	82.0	3/70L	-	-	£24.50	-		
-	12.0	-	19.0	66.0	3/8L	£21.50	-	-	-		
1/2	12.7	22.0	32.0	95.0	3/84L	-	-	-	£25.50		
5/8	15.9	-	32.0	95.0	4/23L	-	-	-	£31.50		
3/4	19.1	-	32.0	92.0	4/5L	-	-	-	£37.00		



PROFESSIONAL ROUTER CUTTERS

Down-cut Shear

- Tungsten Carbide Tipped.
- Two flute cutters with a positive shear angle (downcut) for fast cutting and fine finish.
- Ideal for grooving and trimming veneer finishes and laminated boards.
- Down cut feature stops break out on top edge.

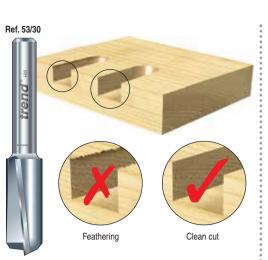

D	D	С	Ove	erall Len	gth	Product	Sh	nank Diame	eter
inch	mm	mm	1/4"	8mm	1/2"	Ref.	1/4"	8mm	1/2"
3/8	9.5	25.0	54.0	54.0	70.0	53/30	£21.50	£21.50	£23.00
1/2	12.7	38.0	-	-	79.0	53/82	-	-	£30.00
1/2	12.7	50.0	-	-	107.0	53/83	-	-	£31.00
	3/8 1/2	3/8 9.5 1/2 12.7	3/89.525.01/212.738.0	inch mm mm 1/4" 3/8 9.5 25.0 54.0 1/2 12.7 38.0 -	inch mm mm 1/4" 8mm 3/8 9.5 25.0 54.0 54.0 1/2 12.7 38.0 - -	inch mm mm 1/4" 8mm 1/2" 3/8 9.5 25.0 54.0 54.0 70.0 1/2 12.7 38.0 - - 79.0	inch mm mm 1/4" 8mm 1/2" Ref. 3/8 9.5 25.0 54.0 54.0 70.0 53/30 1/2 12.7 38.0 79.0 53/82	inch mm mm 1/4" 8mm 1/2" Ref. 1/4" 3/8 9.5 25.0 54.0 54.0 70.0 53/30 £21.50 1/2 12.7 38.0 - - 79.0 53/82 -	inch mm mm 1/4" 8mm 1/2" Ref. 1/4" 8mm 3/8 9.5 25.0 54.0 54.0 70.0 53/30 £21.50 £21.50 1/2 12.7 38.0 - - 79.0 53/82 - -

Inlay Cutters

- Tungsten Carbide Tipped.
- Single and two flute cutters specifically designed for inlaying stringing lines and bands to exact specifications.
- Have solid carbide inserts.
- Very shallow passes must be made to avoid breakage.

Single Flute

			Gingi					
	Ref. 3/11		D inch	D mm	C mm	Product Ref.	Shank I 1/4"	Diameter 8mm
Ref. 2/02		Π	-	1.5	6.0	2/01	£17.50	-
	M		-	1.8	6.0	2/02	£19.00	-
			-	2.0	5.0	2/10	£18.50	£18.50
MH	iren	D	7/64	2.7	8.0	2/12	£20.00	-
end	tr.		Two F	lute				
tr	$\overline{\Sigma}$	Π	D inch	D mm	C mm	Product Ref.	Shank E 1/	
			1/8	3.2	11.0	3/10	£16	6.00
		с	-	3.4	11.0	3/11	£15	5.00
1		╼┤┝╾╿	-	4.5	11.0	3/03	£17	.00

3/4


19.1

19.0

Hinge Recesser


- Two flute TC cutters giving good chip clearance.
- Ideal for shallow lateral routing cuts such as recessing hinges.
- Corners will require final trimming square with a hand chisel or a corner chisel.
- Ref. 3/8L is suitable for Trend Hinge & Lock Jigs. See page 130-133 for full details.



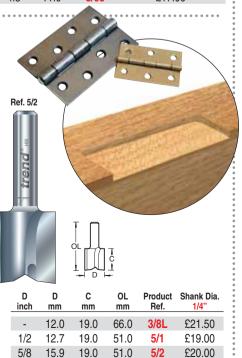

Up-down Shear

- Tungsten Carbide Tipped.
 - Two flute cutters with tips sheared up and down, giving a fine finish.
- For trimming veneered and double-faced boards, plywoods and natural timbers.
- These cutters have the action of pushing the chips towards the middle of the board being cut, thus ensuring that the veneers are sheared off cleanly in the process.




Π						
- 17/17	D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/2"
<u>∖</u> ∦ċ	1/2	12.7	38.1	79.0	14/1	£37.50
₋Lั⊐⊥ ⊣Ď⊢-	1/2	12.7	54.0	108.0	14/2	£42.50

Mortiser

0

- TCT cutters with staggered cutting surfaces.
 Deep mortising and grooving giving good chip clearance.
- For lock mortising, two width cuts will be needed to achieve the standard 19mm mortise.
- The lock mortiser **Ref. 5/53** will plunge and clear chips to a depth of 70mm in a number of passes.
- Tools have extra long shanks. Adjust the cutter in the collet to achieve maximum plunge depth.
- For Ref. 5/53 take several passes to avoid cutter breakage and motor overload.





5/3

51.0

£20.50

Ref. 14/2

trend

Ref. 5/53

trend

MH


trend 9

REBATE CUTTERS

CARBIDE TIPPED

Bearing Guided Rebate Sets

- Popular rebate sets which include different size bearings for a choice of rebates.
- Ease of setting-up and accurate depth of cut.
- Ideal for rebating straight and shaped work pieces.
- Ref. 46/39L has a 60mm shank length to give access to deep rebates.
- Ref. 46/44 is Ideal with delicate applications such as musical instrument production, when a small rebate is required for insertion of purfling.
- When using bearing Ref. B95A, make two passes when a full depth of cut is required by using a larger bearing first.



Bearing Guided Large Rebater


- Bearing guided for straight or curved work.
- For portable and stationary routers.
- Supplied as standard with Ref. BR/191 fitted.
- A variety of alloy bearing rings are available as accessories to give various rebate sizes. Rings are secured between the two bearings.

D	C	E	Product	Shank Dia.
mm	mm	mm	Ref.	1/2"
50.8	22.5	19.1 & 15.9	46/390	

Alternative size rebates using alloy bearing rings below

I	Ring Dia. mm	Rebate E mm	Product Ref.	Price
	44.4	3.2	BR/444	£6.00
	41.3	4.75	BR/413	£6.00
	38.1	6.35	BR/381	£6.00
	31.7	9.5	BR/317	£6.00
	25.4	12.7	BR/254	£4.25
	22.2	14.3	BR/222	£4.25
	20.6	15.1	BR/206	£4.25
	19.1	15.9	BR/191	£4.25
	15.9	17.45	BR/159	£4.25
	14.3	18.25	BR/143	£4.25

Α




D	С	Product	Sł	nank Diamet	er	
mm	mm	Ref.	1/4"	8mm	1/2"	
35.0	12.7	46/39	£51.50	£51.50	£55.50	
35.0	127	46/301	_	_	£62 50	

Supplied with four Bearings below

Rebate I	E Bearing Dia.	Product	
mm	mm	Ref.	Price
7.9	19.0	B19A	£6.00
9.5	16.0	B16A	£4.75
11.1	12.7	B127A	£3.25
12.7	9.5	B95A	£3.75

Alternative Bearings

Bearing Dia. mm	Product Ref.	Price
21.0	B21A	£8.00
23.0	B23A	£8.00
25.0	B25A	£8.50
30.0	B300A	£8.50
	mm 21.0 23.0 25.0	mm Ref. 21.0 B21A 23.0 B23A 25.0 B25A

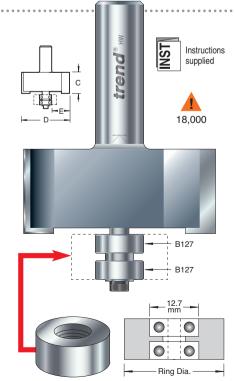

D	С	Product	Shank D	liameter	
mm	mm	Ref.	1/4"	8mm	
24.0	12.7	46/44	£47.50	£47.50	

Ref.

46/44

Supplied with three Bearings below


Rebate E mm	Bearing Dia. mm	Product Ref.	Price
1.0	22.0	B22	£8.00
2.5	19.0	B19	£3.25
4.0	16.0	B16	£3.25

Alternative Bearings

Rebate E mm	Bearing Dia. mm	Product Ref.	Price
1.5	21.0	B21	£8.00
2.0	20.0	B20	£8.00
3.0	18.0	B18	£8.00
3.5	17.0	B17	£8.50
4.5	15.0	B15	£8.50
5.0	14.0	B14	£8.50

Pin Guided Rebater

- The guide pin follows the work edge to give a preset width of rebate.
- Ref. 8D/4 can be used to create a counterbore for a slot to accept M5 and M6 pan head screws. See page 16 for more details.

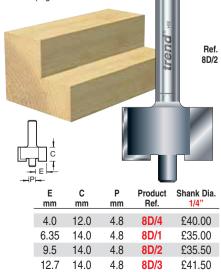



For HSS cutters see page 75

SPIRAL CUTTERS

Ref. 55/08

Ref. S57/2

STC Up-cut (Right Hand) Spiral

- Spiral cutters are not only ideal for use in CNC machines and for fixed head routing applications, but can also be used in portable routers.
- Feed rates range from 5 10m/min with speeds of 18,000 - 24,000 RPM.
- Solid Tungsten Carbide, ideal for hardwoods & abrasive material.
- Produces a fine finish. Up-cut prevents burning in plunge cuts.
- Permits high feed speed and allows better chip clearance.

D	D	С	OL	Product	Sh	ank Diame	ter
inch	mm	mm	mm	Ref.	1/4"	8mm	1/2"
1/8	3.2	12.7	50.8	S55/02	£17.50	-	-
5/32	3.96	15.9	63.5	S55/03	£19.00	-	-
3/16	4.76	19.1	63.5	S55/04	£21.00	-	-
1/4	6.35	25.4	63.0	S55/2	£23.50	-	-
5/16	7.9	25.4	76.0	S55/05	-	-	£87.00
-	8.0	25.0	63.0	S55/06	-	£22.00	-
3/8	9.5	31.8	76.0	S55/3	-	-	£54.00
1/2	12.7	31.8	76.0	S55/4	-	-	£56.00
1/2	12.7	38.0	89.0	S55/5	-	-	£62.50
1/2	12.7	50.8	101.0	S55/6	-	-	£96.00

STC Down-cut (Left Hand) Spiral

- Down-cut spirals are ideal for routing small workpieces or for holding workpieces secure in vacuum jigs.
- Down-cut pushes woodchips below the work.

D	D	с	OL	Product	Sh	ank Diame	eter
inch	mm	mm	mm	Ref.	1/4"	8mm	1/2"
1/8	3.2	12.7	50.8	S55/02LH	£17.50	-	-
5/32	3.96	15.9	63.5	S55/03LH	£19.00	- (-
3/16	4.76	19.1	63.5	S55/04LH	£21.00	-	-
1/4	6.35	25.4	63.0	S55/2LH	£23.50	-	-
5/16	7.9	25.4	76.0	S55/05LH	-	-	£87.00
-	8.0	25.0	63.0	S55/06LH	-	£22.00	-
3/8	9.5	31.8	76.0	S55/3LH	-	-	£54.00
1/2	12.7	31.8	76.0	S55/4LH	-	-	£56.00
1/2	12.7	38.0	89.0	S55/5LH	-	-	£62.50
1/2	12.7	50.8	101.0	S55/6LH	-	-	£96.00

SIC Ball End Up-cut Spiral

- Solid Carbide long reach with superior performance in 3-D carving.
- Ball end to give clean transition between depths.
- Two fluted up-cut spiral.

D	с	OL	Product		Diameter
mm	mm	mm	Ref.	3mm	6mm
3.0	25.0	65.0	S59/3	£41.50	-
6.0	25.0	75.0	S59/6	-	£59.00

Use at recommended speeds as indicated.

ISS Down-cut (Left Hand) Spiral

- For steel foam sandwich clad doors to facilitate a superior cut for windows & openings.
- For pierce and cut operations. Down-cut for superior finish.

				1($0,000 \xrightarrow{L} \xrightarrow{V} \xrightarrow{L}$
D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/2"
1/2	12.7	70.0	140.0	54/1LH	£86.00

CARBIDE A new generation of extended life straight

outer cutters

HIGH

USS Up-cut (Right Hand) Spiral

- Ideal for softwoods where a fine finish is required.
- Up-cut prevents burning in plunge cuts.

D	D	с	OL	Product	Sh	ank Diame	ter
inch	mm	mm	mm	Ref.	1/4"	8mm	1/2"
-	8.0	19.0	80.0	55/08	£28.50	£27.00	-
3/8	9.5	37.0	87.0	55/09	-	-	£31.50

STC Up-down Cut (Combined)


- Fine finish on both sides of laminated materials, solid timber & veneered boards.
- Ideal for edge trimming or veneered & double face boards. Ref. S57/01 for use on 16mm boards.
- Single fluted compression spirals.

D	D	с	OL	Product	Sh	ank Diam	eter
inch	mm	mm	mm	Ref.	1/4"	3/8"	1/2"
1/4	6.35	19.0	64.0	S57/01	£66.50	-	-
3/8	9.5	25.4	70.0	S57/1	-	£105.50) -
1/2	12.7	38.1	89.0	S57/2	-	-	£141.50

SIC Mini Up-cut (RH) & Down-cut (LH) Spiral

- Range of small diameter shank cutters for CNC routers.
- Used for specialised applications including signmaking & PCB machining.
- Up-cut prevents burning in plunge cuts. Down-cut (LH) prevents feathered edges.

D mm	C mm	OL mm	Product Ref.	Shank Dia. 3mm	Ref. S58/4
1.5	5.0	38.0	S58/1	£20.00	TO M
2.0	6.0	38.0	S58/2	£20.00	OLA
2.5	7.0	38.0	S58/3	£20.00	
3.0	12.0	38.0	S58/4	£20.00	
3.0	25.0	65.0	S58/5	£41.50	D
1.5	5.0	38.0	S58/1LH	£20.00	Ŧn W
2.0	6.0	38.0	S58/2LH	£20.00	
2.5	7.0	38.0	S58/3LH	£20.00	
3.0	12.0	38.0	S58/4LH	£20.00	
3.0	25.0	65.0	S58/5LH	£41.50	D





trend



Ref. S59/6

Ref. S55/4LH

Ref. S55/4

trend

.

ROTA-TIP™ **Replaceable Tips**



Shank Diameter

1/2

-

£51.50

£48.50

£58.50

£58.50

£66.50

£51.50

£51.50

£51.50

£51.00

£51.00

£51.50

£53.00

£54.00

£53.00

£55.00

£55.50

£49.00

Shank Dia.

1/2

1/4'

£32.50

-

-

-

-

-

-

-

- Solid Carbide replaceable blades.
- Tool body remains in place when changing blades, thus reducing down-time. Straight cutters have blades with two or four cutting edges, allowing them to be rotated and locked in identical positions.

С

mm

29.5

29.5

29.5

29.5*

29.5*

49.5

29.5

29.5

29.5

49.5

49.5

29.5

29.5

29.5

49.5

29.5

29.5

29.5

ab

С

mm

OL

mm

66.0

76.0

76.0

100.0

89.0

100.0

76.0

76.0

88.0

107.0

90.0

88.0

88.0

88.0

107.0

88.0

88.0

76.0

OL

mm

Plunge Tip

Product

Ref.

RT/03

RT/04

RT/10

RT/11

RT/13

RT/05

RT/06

RT/18

RT/12

RT/07

RT/08

RT/19

RT/14

RT/16

RT/17

RT/15

Product

Ref

RT/12M

RT/11M

1/2" shank tools are ideal for use in production applications.

5/8

5/8

-

-

3/4

3/4

-

7/8

With

D

inch

Clear economical advantage over conventional brazed tip tooling.

D

15.9

15.9

16.0

16.0

18.0

19.1

19.1

20.0

22.0

22.2

epl

D


mm

Single D **Replaceable** inch mm **Blade** 1/2 12.7 120 The single blade can be rotated 180° to give double 12.7 1/2 the life of a conventional 1/212.7 tool. 1/2 12.7 Refs. RT/11. RT/11M & 1/212.7 RT/13 are ideally suited for 14.0 use with Trend Combi 15.0

- worktop jigs. Ref. RT/13 is ideal for Trend KWJ900 worktop jig
- Refs. RT/11M & RT/12M have a shorter shank. designed for use with Makita 3600B & 3612BR, Ryobi and Hitachi routers.
- A Refs. RT/13 to be used on chipboard only.
- Refs. RT/15, 16, 17, 40 & 41 are suitable for fixed head machines only.


Suitable for plunge cutting.

trend

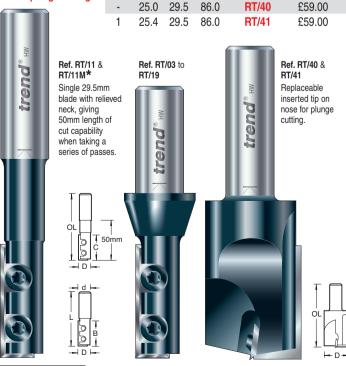


Two Replaceable Blades

- Refs. RT/21 to RT/24 have blades that can be rotated 180° to give double the life of a conventional tool. Not recommended for plunge cutting unless ramped into workpiece.
- Refs. RT/21 & RT/23 are used for rough cutting only & have staggered blades
- A Ref. RT/24 should be used in fixed head machines only.
- Refs. RT/50 & RT/51 are plunge tools with a TC tip brazed into nose suitable for plunge cutting & the blades that can be rotated in 90° increments.

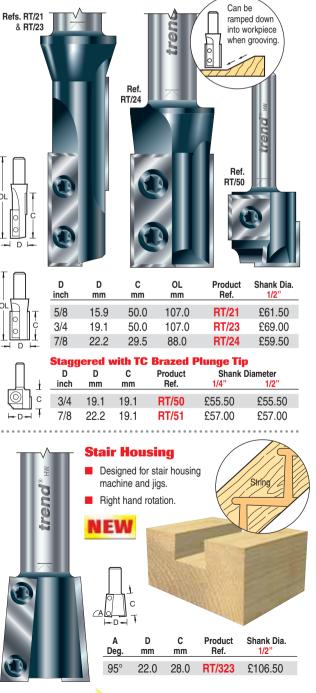


NEW SIZES

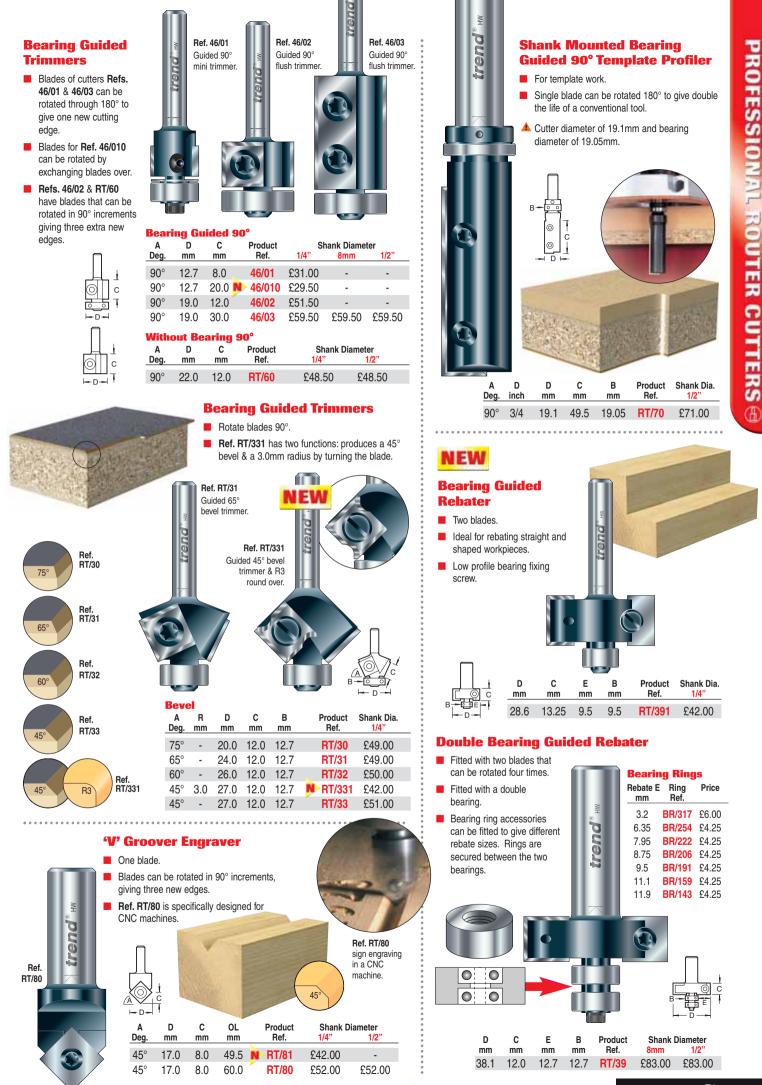

NEW SIZES

All prices are exclusive of VAT

trend

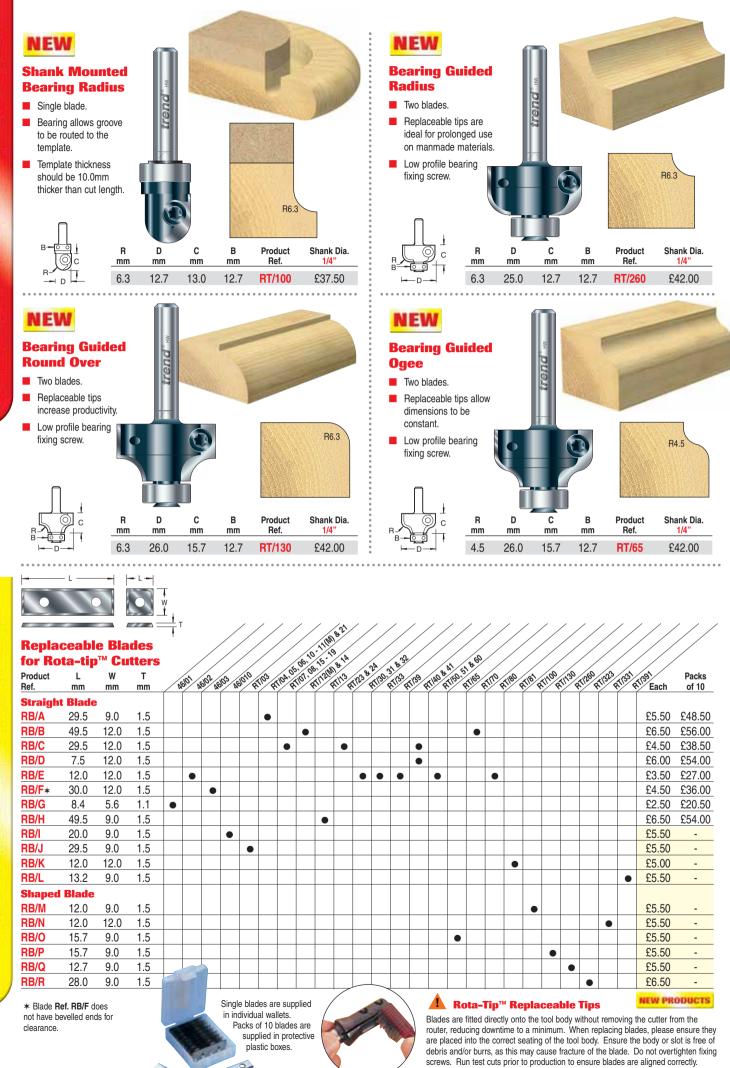

PROFESSIONAL ROUTER CUTTERS

14

trend

FRAIGHTS Special Applications

One Flute D

mm

6.3

6.3

12.7

6.3

12.7 32.0

Bearing Guided

NAMIC* CAL

р

mm

3.0

4.0

5.0

6.0

D

mm

6.3

6.3

12.7

С

mm

20.0

20.0

19.0

Grade

SIL

STO

TCT

Two Flute

ICT 6.3

ICT 6.3

TCT 6.3 С

mm

10.0

19.0

32.0

12.7

25.4

Two Flute Spiral Up-cut

С

mm

12.0

14.0

19.0

Product

Ref.

ACR2/80

25.0 ACRS3/22 £28.50

ACR3/81

46/05

46/07

Product

Ref.

S60/03

S60/04

S60/05

S60/06

0

16.0 ACR3/20

ACRS2/6 £26.50

ACRS2/60 £27.50



Shank Dia.

1/2

£30.00

-

£30.00

-

1/4"

£23.50

£17.50

£18.50

Shank Dia.

1/4"

£28.50

£28.50

£28.50

£28.50

£31.00

£32.50

Ref. S49/10

Coarse cutting

(non-plunge).

Shank Dia.

1/4"

£23.50

£21.50

£49.00

Acrylic Cutters

- Single flute for fast cutting.
- Two flute for fine finish.
- Cutters with prefix ACR are specially ground for cutting acrylic. Other two flute cutters can be polished for acrylic. Please refer to Trend Technical Department.
- Cutters with prefix S are Solid Carbide and are long lasting for a super fine finish.
- Cutters Ref. ACR2/80 & ACR3/81 can be used on phenolic resin.





reno



ACR3/81 Single flute for Two flute straight fast cutting. gives fine finish.

Refs. 46/05 & 07 Two flute mini-trim with guide bearing will profile intricate shapes. Max. 2.0mm trimming.



Ref. S60/1, S60/03 - 06 Up-cut helical gives long lasting super fine finish.

Down-cut helical gives long lasting super fine finish on fine acrylics. Prevents vibration.

Two Flute Spiral Down-cut

STC 6.3 19.0 S60/1LH

Solid	Carbide	Rasps

- Solid coarse and fine cut Carbide Rasps/Burrs
- For grinding, carving and shaping of glass reinforced plastics (GRP).
- Ref. S49/10 with twin bearing guides is ideal for following a template but is not suitable for plunge cutting.

Ref. S49/1 Fine cut - end mill cut (for plunge cutting).

All prices are exclusive of VAT

Spare Parts for Ref. S49/10

Bearing 12.7mmØ B127 £4.75 Collar COLL/14 £1.50

STC

Product Ref.

S49/01

S49/1

S49/10

PROFESSIONAL ROUTER CUTTERS 🖲

ABS/PVC Straight

STC

- Used to slot and trim low melting point plastics such as ABS, Styrene and PVC.
- For maximum life these cutters are Solid Carbide.
- Ref. ABSS2/61 is single flute for fast cutting.
- Ref. ABSS3/22 is two flute for fine finish.



cutting.

One Flute

wo Flute

С

mm

25.0

25.0


Use at recommended speeds as indicated.

D

mm

6.3

6.3

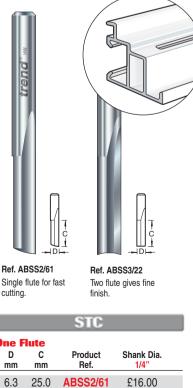









STC STC STC

19.0 6.3 19.0 S60/1

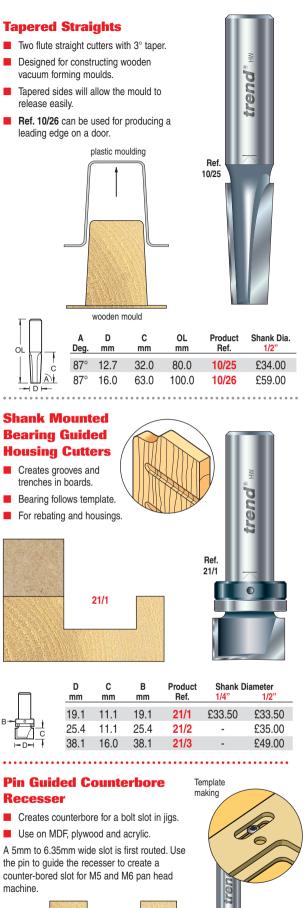

Bearing Guided Inlay Cutter Sets


- To produce grooves for the insertion of coloured or natural wood inlay.
- Supplied with three bearings to allow different depths of cut.
- Alternative bearings available.




34/91

34/92

С



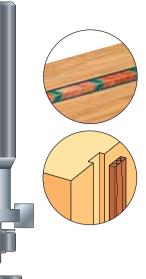

C mm	D mm	N mm	OL mm	Product Ref.	Shank Dia. 1/2"	
6.3	22.2	19.0	77.0	34/90	£40.00	
12.7	22.2	19.0	82.0	34/91	£43.00	
19.0	22.2	19.0	88.0	34/92	£45.50	

trend

Supplied with three Bearings

Ref.

Depth E mm	Bearing Dia. mm	Product Ref.	Price
1.6	19.0	B19	£3.25
3.2	16.0	B16	£3.25
4.75	12.7	B127	£4.75

Alternative Bearings

Theorem and a second				
Depth E mm	Bearing Dia. mm	Product Ref.	Price	
0.6	21.0	B21	£8.00	
1.1	20.0	B20	£8.00	
2.1	18.0	B18	£8.00	
2.6	17.0	B17	£8.50	
3.6	15.0	B15	£8.50	
4.1	14.0	B14	£8.50	

Ref

36/3


Strip Recesser


.


Five sizes of recessing cutters for producing double rebates.

С

- For producing recesses with a lower rebate.
- Designed to accept library/bookcase shelving strip. Ref. 36/19 is specifically designed for Tonk Strip.

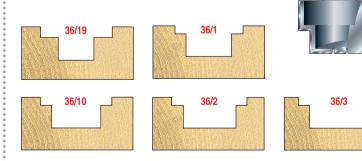

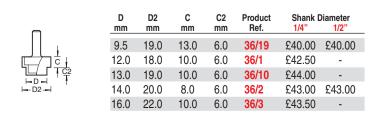



Shank Dia.

£40.00

1/4

TRIMMERS PROFILERS

Bearing Guided

- Self-guiding trimmers with bearings mounted on end of cutters.
- For trimming plastic or plywood overlay.
- For copy profiling, use the bearing to follow a template or base edge of board.
- An approximate 3mm overlap should be left before copy profiling.
- When using plastic laminate always allow laminate adhesive to dry before trimming. This avoids clogging the guide bearing.
- Tool diameters are 0.2mm smaller than bearing diameter.
- Refs. T46/1, 46/2 and 46/20 are downcut to prevent breakout on veneer.
- Ref. 46/211 has a sleeved bearing to allow for regrinds in case of resharpening.





tren
1-11

Ref.

46/200



inverted



- Self guided with low profile ball bearing guide and bearing fixing screw.
- For use in restrictive applications or within rebates of minimum 8mm height.
 - Down cut to prevent breakout on veneers.

	A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"		
	90°	19.1	16.0	19.1	46/200	£30.50		
	90°	19.1	25.0	19.1	46/201	£35.50		
	Replacement Bearing							
					Product Ref.	Price		
For 46/200 & 46/201					B19A	£6.00		

D H=							
D mm	C mm	B mm	Product Ref.	1/4"	Shank E <mark>8mm</mark>)iameter <mark>3/8</mark> "	1/2"
6.3	12.7	6.3	46/05	£17.50	-	-	-
6.3	25.4	6.3	46/07	£18.50	-	-	-
9.5	12.7	9.5	T46/0	£19.50	-	-	-
9.5	25.0	9.5	T46/02	£19.50	£19.50	-	-
12.7	16.0	12.7	T46/04	£18.50	-	-	-
12.7	25.0	12.7	T46/01	£20.00	£20.00	-	£20.00
12.7	38.1	12.7	46/210	-	-	-	£35.00
12.7	50.0	12.7	46/23	-	-	-	£56.00
15.9	13.0	15.9	• T46/1	£21.50	£21.50	-	-
18.2	14.0	18.2	46/211	£22.50	-	-	-
18.2	37.0	18.2	46/21	-	£47.50	£47.50	-
18.2	50.0	18.2	46/22	-	-	£55.50	£56.00
19.1	14.0	19.1	• 46/2	£28.50	+ £20.50	£31.00	-
19.1	25.0	19.1	• 46/20	£34.50	£34.50	£35.50	£35.50
19.1	50.0	19.1	46/212	-	-	-	£52.50
	D mm 6.3 9.5 9.5 12.7 12.7 12.7 12.7 15.9 18.2 18.2 19.1	D C mm mm 6.3 12.7 6.3 25.4 9.5 12.7 9.5 25.0 12.7 16.0 12.7 25.0 12.7 36.1 12.7 30.0 15.9 13.0 18.2 14.0 18.2 50.0 19.1 14.0 19.1 25.0	D C B mm mm mm 6.3 12.7 6.3 0.5 12.7 9.5 9.5 25.0 9.5 12.7 16.0 12.7 12.7 25.0 12.7 12.7 25.0 12.7 12.7 38.1 12.7 12.7 30.0 15.9 15.9 13.0 15.9 18.2 14.0 18.2 18.2 50.0 18.2 18.2 50.0 18.2 19.1 14.0 19.1	D C B Product Ref. 6.3 12.7 6.3 46/05 6.3 25.4 6.3 46/07 9.5 12.7 9.5 T46/0 9.5 25.0 9.5 T46/02 12.7 16.0 12.7 T46/04 12.7 25.0 12.7 T46/01 12.7 25.0 12.7 T46/01 12.7 38.1 12.7 46/210 12.7 50.0 12.7 46/23 15.9 13.0 15.9 •T46/1 18.2 14.0 18.2 46/211 18.2 37.0 18.2 46/21 18.2 50.0 18.2 46/22 19.1 14.0 19.1 •46/20	D C B Product Ref. 1/4" 6.3 12.7 6.3 46/05 £17.50 6.3 25.4 6.3 46/07 £18.50 9.5 12.7 9.5 T46/0 £19.50 9.5 25.0 9.5 T46/02 £19.50 12.7 16.0 12.7 T46/04 £18.50 12.7 25.0 12.7 T46/01 £20.00 12.7 25.0 12.7 T46/01 £20.00 12.7 38.1 12.7 46/210 - 12.7 50.0 12.7 46/23 - 15.9 13.0 15.9 •T46/1 £21.50 18.2 14.0 18.2 46/21 - 18.2 37.0 18.2 46/21 - 18.2 50.0 18.2 46/22 - 19.1 14.0 19.1 •46/20 £34.50	D C B Product Ref. 1/4" Shark C 6.3 12.7 6.3 46/05 £17.50 - 6.3 25.4 6.3 46/07 £18.50 - 9.5 12.7 9.5 T46/0 £19.50 - 9.5 12.7 9.5 T46/02 £19.50 - 9.5 25.0 9.5 T46/02 £19.50 - 12.7 16.0 12.7 T46/01 £20.00 £20.00 12.7 25.0 12.7 T46/21 £20.00 £20.00 12.7 38.1 12.7 46/210 - - 12.7 30.0 15.9 •T46/1 £21.50 £21.50 12.7 30.0 15.9 •T46/1 £21.50 £21.50 18.2 14.0 18.2 46/21 £22.50 - 18.2 37.0 18.2 46/21 - £47.50 18.2 50.0 18	D C B Product Ref. 1/4" Shark 8mm Dimmeter 3/8" 6.3 12.7 6.3 46/05 £17.50 - - 6.3 25.4 6.3 46/07 £18.50 - - 9.5 12.7 9.5 T46/0 £19.50 - - 9.5 25.0 9.5 T46/02 £19.50 £19.50 - 9.5 25.0 9.5 T46/02 £19.50 £19.50 - 12.7 16.0 12.7 T46/04 £18.50 - - 12.7 25.0 12.7 T46/01 £20.00 £20.00 - 12.7 38.1 12.7 46/21 - - - 12.7 38.0 12.7 46/21 - - - 12.7 38.0 18.2 46/21 £21.50 £21.50 - 18.2 14.0 18.2 46/21 - £47.50 £

For Refs.

Template

46/05 & 46/07

always restrict


overlap of material to a max. of 3.0mm.

Replacement Bearings


	Product Ref.	Price
For 46/05 & 46/07	B63B	£3.75
For T46/1	B16	£3.25
For T46/0, T46/02	B95A	£3.75
For T46/01, T46/04, 46/23 & 46/210	B127A	£3.25
For 46/21 & 46/22	B18	£8.00
For 46/2, 46/20 & 46/212	B19	£3.25
For 46/211	B182	£7.00

Bearing Guided Overlap Trimmer Roughing cutter which leaves an

- overhang of 3mm, for secondary final trimming.
- Life can be extended by varying height of cutter.

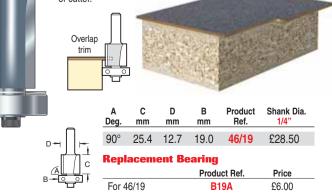

trend

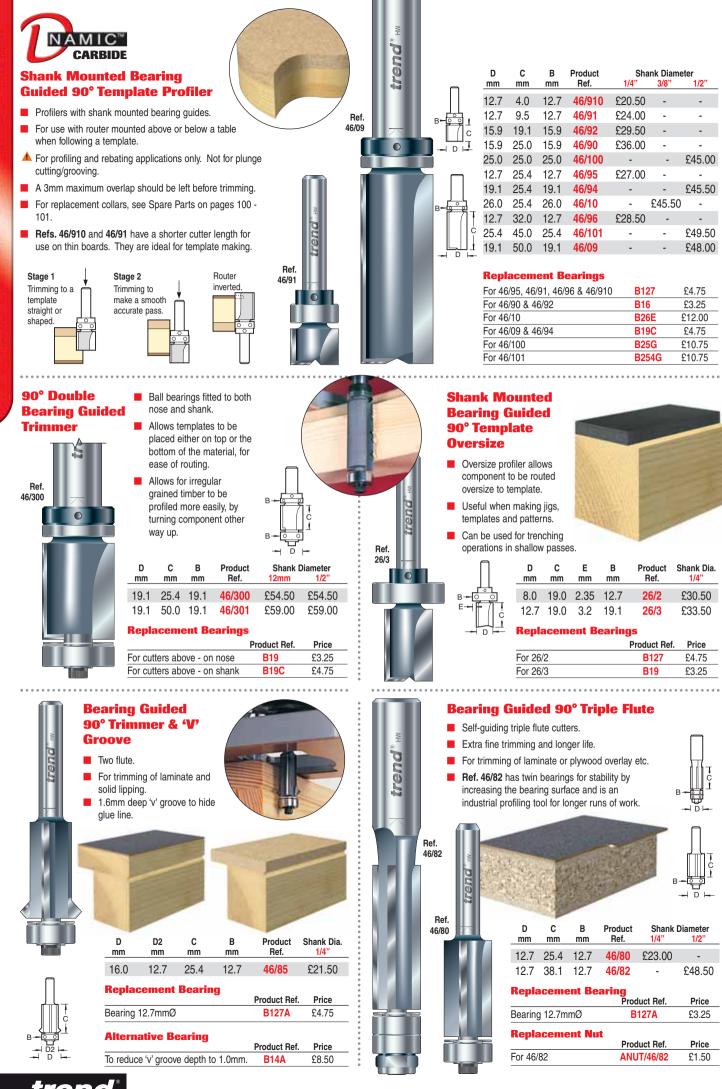

trend

All prices are exclusive of VAT

AMINATE TRIMMERS



Guided Economy Trimmers

- Solid Tungsten Carbide economy cutter.
- Self-guiding 90° trimming only with Ref. S48/39 & S48/40.
- Self-guiding at 83° with Ref. S48/41.
- Ref. S48/42 is for trimming on a rebate. The guide length is 3mm.
- Ref. S48/39 is a shorter version of Ref. S48/40.



Refs. S48/40

& S48/39








Ref. S48/42

				STC		
τn	 A Deg.	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
	90°	6.3	10.0	38.0	S48/39	£19.00
	90°	6.3	10.0	52.0	S48/40	£22.00
	83°	6.3	6.0	38.0	S48/41	£19.00
	 90°	6.3	6.0	35.0	S48/42	£19.00


Combi Trimmers


- For trimming top & lip.
- Economical cutters, perform 3 functions:
- To top trim the overlay at 90°. 1.
- 2. To trim the overlay at 45° or 60°.
- The base of the cutter can trim the vertical 3. lipping at 90°.
- Requires side fence or roller bearing.

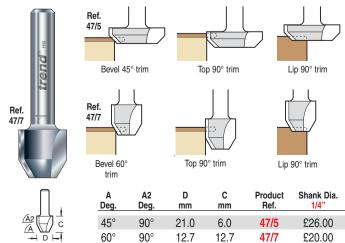

Economy Trimmers

- Solid Tungsten Carbide economy cutter.
- For use on short runs at 90° or 60° with Ref. S47/70, at 90° or 83° with Ref. S47/71 and at 90° or 45° with Ref. S47/72.
- Will trim and bevel by changing cutter height.
- Requires a side fence or a copy follower guide on the router.
 - ireno Bevel 45° trim Top 90° trim





				STO	2		
A Deg.	A2 Deg.	D mm	C mm	C2 mm	OL mm	Product Ref.	Shank Dia 1/4"
45°	90°	6.3	6.3	3.2	38.0	S47/72	£19.00
60°	90°	6.3	6.0	6.0	32.0	S47/70	£21.00
83°	90°	6.3	5.0	4.5	38.0	S47/71	£19.00

Bevel Trimmers

- Three bevel cutters for edging.
- For trimming laminate, when a wider edge line is preferred on the finished edge.
- Supplied in 80°, 60° and 30° versions of bevel angle.

No bottom cut.

Ref.

47/6A





80







A Deg.	D mm	C mm	Product Ref.	Shank Dia. 1/4"
80°	14.0	20.0	47/3	£26.00
60°	12.0	24.0	47/6A	£25.50
30°	10.0	24.0	47/6C	£24.00




Ref. S47/72		
ΤΠ		


Bearing Guided Combi Trimmers

- A self-guided combination trimmer.
- A 90° trim is obtained by engaging the bottom half.
- A 45° trim is obtained by lowering the cutter.
- A fine height adjuster is recommended when using this cutter.
- A larger 20mm bearing will spread the wear to the cutting edges when 45° trimming.









Product

Ref.

46/06

B18

B20

Shank Dia.

£38.00

£8.00

£8.00

1/4

C2

mm

5.0

C3

mm

6.0



45

Replacement Bearing


Alternative Bearing

Bearing 18.0mmØ

Bearing 20.0mmØ to spread wear

Bearing Guided Adjustable Chamfer

- These two adjustable trimmers will trim and bevel the top and bottom edges of the workpiece.
- The width of workpiece accommodated can be adjusted with spacers.
- Trimmer blocks have four wings.
- Life of cutting edges can be extended with larger bearing 26mm Ref. BB26.

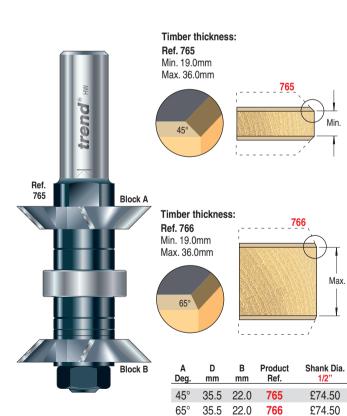

Spare Parts

45° Block A

45° Block B

65° Block A

65° Block B


Arbor with spacers

Bearing 22.0mmØ

Alternative bearing



trend



SP-765A

SP-765B

SP-766A

SP-766B

SP-765C

BB22

BB26

£36.00

£36.00

£36.00

£36.00


£7.50

£8.00

£10.75

Bearing Guided Bevel Trimmers

- Five self-guided trimmers.
- Cut a wider edge line, at angles between 30° and 80°.
- Bearing is supplied as standard.
- A larger 19mm diameter bearing will spread the wear of the cutting edges.
- Ref. 46/6D has a gap between the tips and bearing, to reduce adhesive build-up.














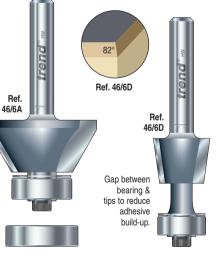







_	A Deg.	D mm	C mm	Product Ref.	Shank Dia. 1/4"
	82°	15.0	12.0	46/6D	£19.50
	80°	20.0	14.0	46/3	£34.00
	60°	29.0	13.0	46/6A	£34.50
	45°	27.0	9.0	46/6B	£35.00
	30°	27.0	7.0	46/6C	£32.50
				_	

Replacement Bear	ʻing		
For 46/3-6C 16.0mmØ	B16	£3.25	
For 46/6D 12.7mmØ	B127A	£3.25	
Alternative Bearin For 46/3-6C 19.0mmØ	g B19	£3.25	

Guided Pierce & Trim

- Combination pierce and trim cutters.
- Pierce and cut out apertures in laminate worktops.
- Using nose of the cutter as a guide follower for all except Ref. 47/42.
- Ref. 47/8 is High Speed Steel for extra fine finish on nonabrasive materials.
- Ref. S47/4 is made from Solid Carbide for long life.
- Refs. 47/50, 47/50S and 47/42 will trim bottom and top laminate simultaneously.
- Refs. 47/50S and 47/42 are specially designed for the caravan building industry, used for cutting apertures in windows, doors and the floor pan.

trend

Ref. 59/1 is a single fluted spiral, specifically suited for aluminium panels in caravan manufacture. Ref. 47/40

Ref. 59/1

Ref. 47/42 has a TC plunge cut.

Ref. 47/4,

S47/4, 47/45 & 47/8

/A

D

Δ




С U C2

irend

Ref. 47/42


trend

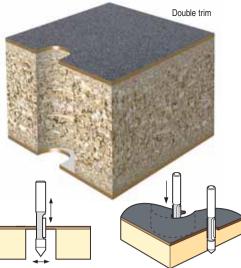

	-					
				CT		
Sing	le Flı	ute				
D mm	C mm	P	roduct Ref.	Sh 1/4"	ank Diame 3/8"	eter 1/2"
6.3	18.0) 4	47/4	£17.00	-	-
6.3	22.0) 📢	S47/4	£24.00	-	-
9.5	25.0) 4	47/45	-	£27.50	-
12.7	29.0) 🚺 4	47/42	-	-	£32.50
Two	Flute	•				
D mm	1	C mm	C2 mm	Produ Ref		nk Diameter 1/2"
	-	~~ ~				004.00

D mm	C mm	C2 mm	Product Ref.	Shank Diameter 1/2"
12.7	30.0	30.0	47/40	£34.00
12.7	22.5	22.5	47/50S	£42.50
12.7	24.0	24.0	47/50	£42.50

		HSS	
Single Fl	ute		
D mm	C mm	Product Ref.	Shank Diameter 1/4"
6.3	16.0	47/8	£13.50
Single Fl	ute Spira	1	
6.3	19.1	59/1	£23.50

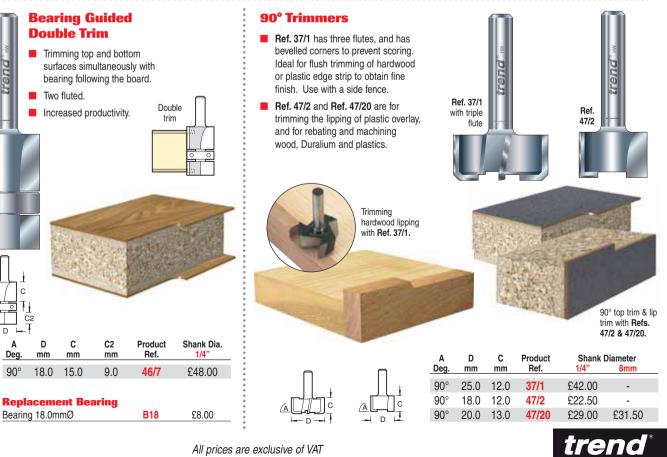

JOINTING CUTTERS

Bearing Guided Finger Jointer Set 866



Ref. 866 Finger Jointer combines an assembly of five TCT slotting cutters with an abutting-edge cutter to produce a profile that extends the glue line threefold, resulting in an extremely strong joint. The Finger Jointer fits into any portable or stationary router with a 1/2" collet.

Performing the cut

₀⊑


Timber must be machined square. The cutters should be assembled to match the spindle rotation, and be stacked at 90° to one another to ease stress on the tool.

> **Timber thickness** Min. 11.0mm (7/16") Max. 36.0mm (1-3/8")

> > D


mm

40.0



Min. 11.0mm (7/16") Max. 16.0mm (5/8")


Timber thickness Min. 31.0mm (1-3/16") Max. 36.0mm (1-3/8")



oparo i arto		
Arbor with spacers	SP-866A	£23.00
Tapered finger cutter - 2 wing	SP-866B	£13.50 (each)
Tapered butting cutter - 2 wing	SP-866C	£15.00
Bearing 28mmØ	BB28	£10.75
Spacer 8mm bore x 3.4mm thick	SPAC/8/34	£1.25 (each)

Bearing Guided Combi Jointer Set 876

INST rend Instructions supplied etc. Please note. Α Timber ends 18,000 must be cut square.



trend

This Comb Jointing Set can be fitted to all heavy duty routers mounted in a fixed head position. It comprises a set of five 4mm kerf, TCT groovers, mounted on an arbor and three ball bearings. These offer alternative cutting depths and provide a self-guiding facility.

The Comb Jointer is ideally suited for producing small boxes, instrument cases




0000 Max. 40.0mm

D mm	C mm	B mm	Product Ref.	Shank Diameter 1/2"
47.6	4.0	28.0	876	£106.50
Spare P	arts			
Arbor with	spacers	5	SP-876A	£23.50
Slotter - 3	wing		SP-876B	£14.00 (each)
		Timber Thickness	s	
Bearing 34	ImmØ	up to 6.5mm	BB34	£10.75
Bearing 29mmØ 6.6mm to 9.0mm			BB29	£10.75
Bearing 28	ßmmØ	9.1mm to 9.5mm	BB28	£10.75
Spacer 8m	nm bore	x 5.3mm thick	SPAC/8/53	£1.25 (each)

Bearing Guided Finger Jointer Set 865

Timber thickness Min. 11.0mm Max. 26.0mm

A bearing guided reversible finger jointer, to increase the gluing area for edge to edge joints.

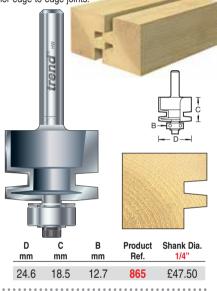

Offset

Tongue & Groover A heavy duty reversible finger jointer, to increase


the gluing area for edge to edge joints. Timber thickness

Min. 14.0mm Max. 25.0mm







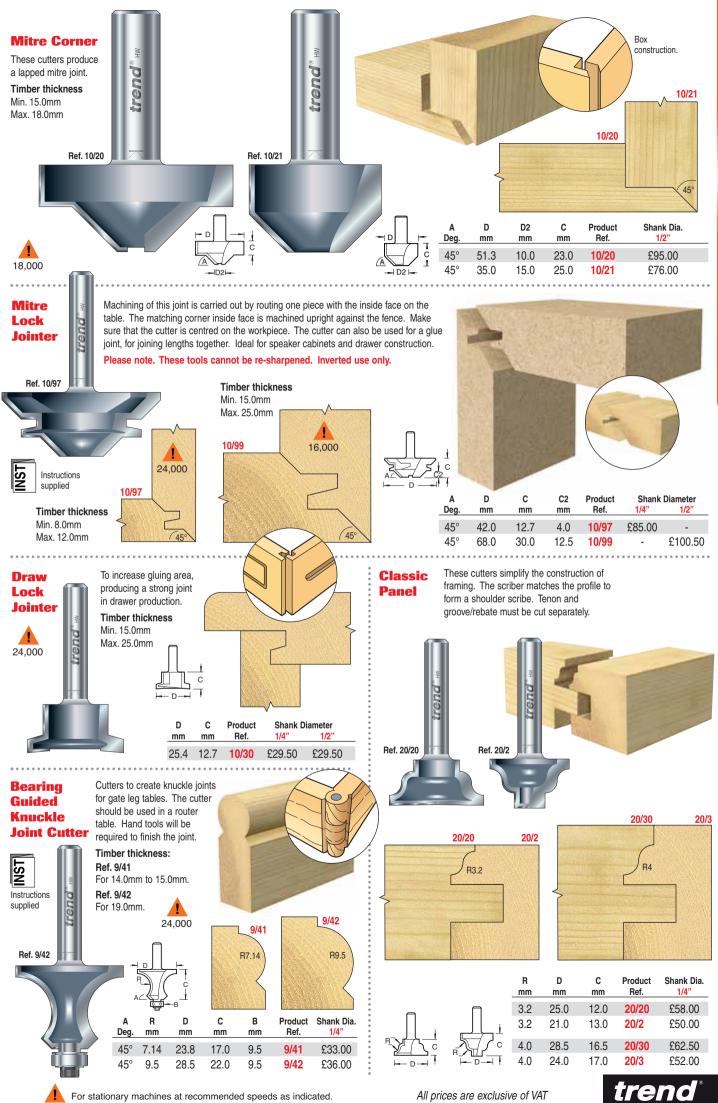

For stationary machines at recommended speeds as indicated.

PROFESSIONAL ROUTER CUTTERS

CHAMFER & 'V' GROOVE TC **Three Flute** Engraver Engraver Solid Carbide for long life. Ideal for engraving Cuts cleanly without feather and veining work. edging. Solid Carbide for S11/03 S47/70 S11/01 long life. Cuts to a fine ' V' (45° (60° groove point. Ideal for sign Ref. S11/01 (82.5° writing. (60° С Shank Diameter Α D С C2 Product -D-Deg mm mm mm Ref. 3mm 1/4' 45 3.0 3.0 S11/03 £19.50 D С C2 Product Shank Diameter _ -Deg. mm mm mm Ref. 1/4' 8mm 60° 6.3 5.0 6.0 S47/70 £21.00 A) -60° 12.5 £43.00 £43.00 D 82.5° £31.00 14.5 14.0 S11/11 5.0 15.0 16.0 S11/01 **Shank Mounted Chamfer 'V' Groove** Decorative fluting **Ball Bearing** following a template. Use for bevelling, chamfering and for Cutters producing mortar grooves. Approx. Follows template mounted 1.0mm flat will be found on nose. on board surface. Template 'V' jointed Ref. 11/3 is ideal for imitating 'V' should be at least 5mm board jointed tongue and groove on manthicker than cutter cut made board. length. Approx. 1.0mm flat Ref. 11/30 will be found on nose. Ref. 11/20 11/40 11/41 Mitre 11/20 (45 ioints. (45° 60° С A Ď D С в Product Shank Diameter Α Deg. 11/1 mm mm mm Ref. 1/4" 1/2" 11/5 11/2 (45° (30° 60° £29.00 12.7 16.0 12.7 11/20 (60° 45° 12.7 12.7 12.7 11/40 £25.50 C 45° 19.1 16.0 19.1 11/41 £35.00 -11/3 11/30 10/10 Mortar (45° **Groove &** (45° (45° Large irend Chamfer 10/11 10/12 Use for producing mortar grooves and 18,000 for bevelling Ref. 10/2 applications. (45° 10/1 10/2 (45° С Product Shank Diameter D C2 Α 1/4" 1/2" Deg. Ref. mm mm mm 30° 21.5 5.5 £27.00 12.0 11/1 £27.00 (45° 60° 12.7 10.3 £21.00 £21.00 £21.00 11.9 11/5 60° 45° 9.5 5.0 6.5 11/2 £26.00 --45° 19.1 9.2 13.0 11/3 £22.50 £22.50 £22.50 45° 11/30 £51.50 25.4 13 17.5 D С Shank Dia. -Δ C2 Product Deg mm Ref. 10/10 mm mm 1/245° 32.0 15.0 22.0 £41.00 45° 41.0 22.5 23.0 10/1 £41.50 45° 38.0 19.0 26.5 10/11 £38.50 (A) 51.0 10/12 60° 38.0 27.0 25.5 10/2£45.00 45° 25.0 35.0 £86.50





All prices are exclusive of VAT

46/38

(45°

Shank Diameter

1/2

£43.50


£51.00

1/2'

£45.50

£54.50

£59.00

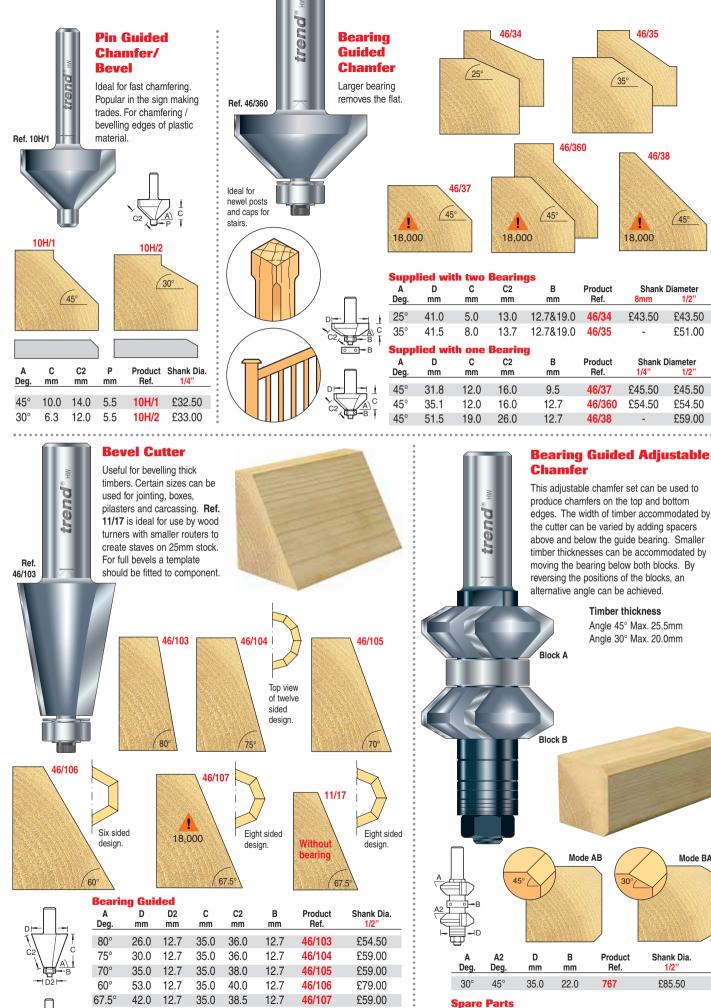

Product

Ref.

11/17

Shank Dia

1/4

£42.00

Block A - 3 wing Block B - 3 wing

Arbor with spacers

Bearing 22mmØ

Without Bearing

Α Deg

67.5°

D

mm

28.0

С


mm

28.0

25

Timber thickness

Angle 45° Max. 25.5mm Angle 30° Max. 20.0mm



j-o						
A Deg.	A2 Deg.	D mm	B mm	Product Ref.	Shank Dia. 1/2"	
30°	45°	35.0	22.0	767	£85.50	
	Parts - 3 wing			SP-767A	£36.00	

SP-767B

SP-767C

BB22

£36.00

£11.00

£8.00


trend

DOVETAIL CUTTERS

Dovetail Cutters

For dovetail joints and sliding dovetails. To suit user preference, the table shows angles from the horizontal and

from the horizontal and the profiles show angles from the vertical.

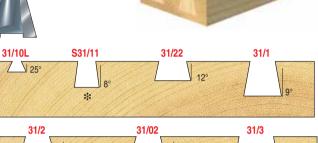

	Α	D	D	С	Product	s	hank Diam	eter
	Deg.	mm	inch	mm	Ref.	1/4"	8mm	3/8"
	115°	5.0	-	3.0	31/10L	£25.50	-	-
	98°	6.0	-	6.9	S31/11	*£24.50	-	
a l Ac	102°	9.5	3/8	8.5	31/22	£33.50	-	-
	99°	10.0	-	10.0	31/1	£22.00	-	-
	103°	13.2	-	14.0	31/2	✤ £22.50	-	-
	103°	13.2	-	13.0	31/02	£24.50	-	-
	100°	14.0	-	14.0	31/3	£23.50	-	-
a Mc	105°	14.0	-	14.0	31/4	• £17.50	-	-
	97°	16.0	5/8	16.0	31/5	£27.00	-	-
	105°	22.0	7/8	22.0	31/20	-	£27.50	£27.50

- * For use with Trend Dovetail Jig DJ300.
- ✤ For use with DeWalt Dovetail Jig DE6251.
- For use with Bosch Dovetail Jig ZF60.

D

mm

14.0

16.0

16.0

19.0

19.0

22.0

22.0

25.4

25.4

Α

Deg.

95

95°

95

95°


95°

95°

95°

95°

95°

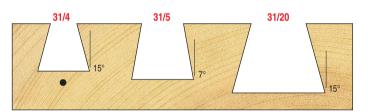

D

inch

-

5/8

5/8

3/4

3/4

7/8

7/8

1

1

С

mm

20.0

26.0

26.0

25.5

25.5

26.0

26.0

25.4

25.4

Ref.

32/10

32/11

32/11

32/12

32/12

32/13

32/13

32/14

32/14

Ref. 32/11 left hand & Ref. 32/11 right hand	P E F F F F F F F F F F F F F F F F F F
32/10	32/11

32/13

*

Stair Housing Dovetail Cutters

Purpose made for stair housing jigs. Ensures tight fit of tread in string.

Refs. 32/11 to 32/14 are available in left hand (LH) and right hand (RH) rotation. RH cutters are also used with Trend Stair Jigs.


Please state LH or RH when ordering.

Trend Stair Jig Ref. STAIR/A

Recommended cutters for tread thickness: Ref. 32/10X1/2TC 22mm (7/8") Ref. 32/11X1/2TC 25.4mm (1") Ref. 32/12X1/2TC 28.5mm (1-1/8") Ref. 32/13X1/2TC 32mm (1-1/4")

32/12

32/14





Product Rotation Shank Dia.

LH

RH

LH

RH

LH

RH

LH

RH

1/2'

£41.50

£48.00

£41.50

£48.00

£43.00

£50.00

£43.00

£54.50

£50.00

Stair Jigs See page 124 for full details. Ref. STAIR/A <u>Ref. STAIR/B</u>


Ref.

31/02



5

All prices are exclusive of VAT

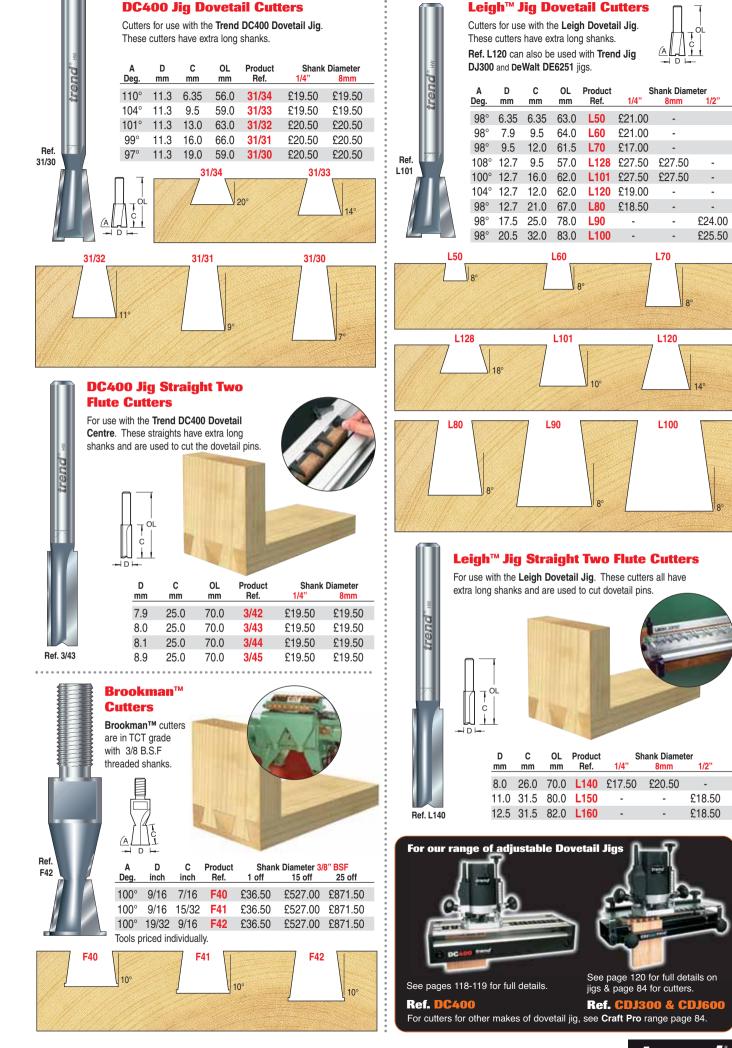

trend[®] 27

OVOLO & ROUNDING OVER

TUNGSTEN CARBIDE TIPPED

Shank Diameter


12mm

1/2"

8mm

28

Bearing Guided Ovolo

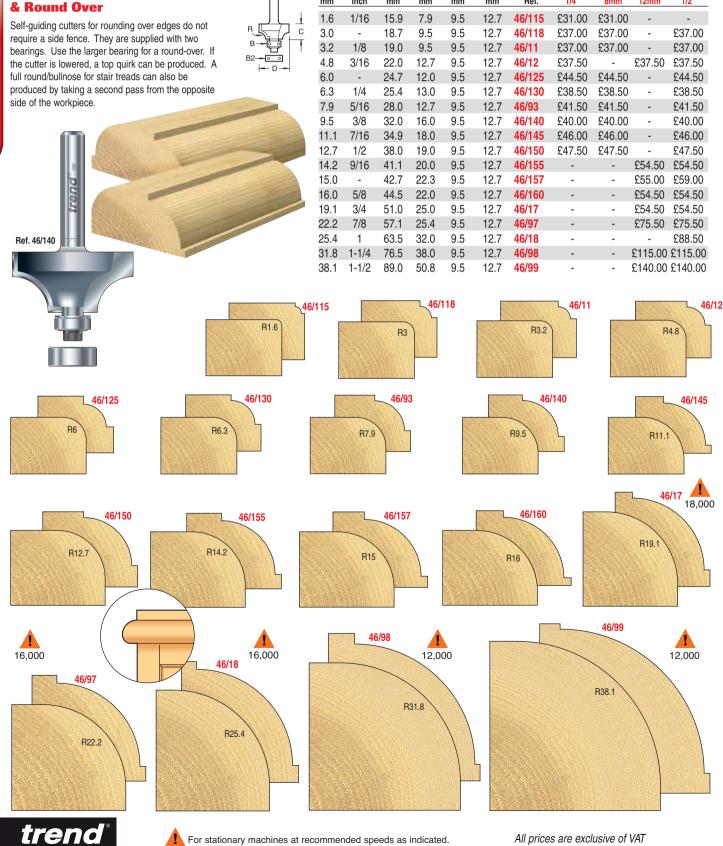

R

mm

R

inch

D

mm

С

mm

В

mm


B2

mm

Product


Ref.

1/4"

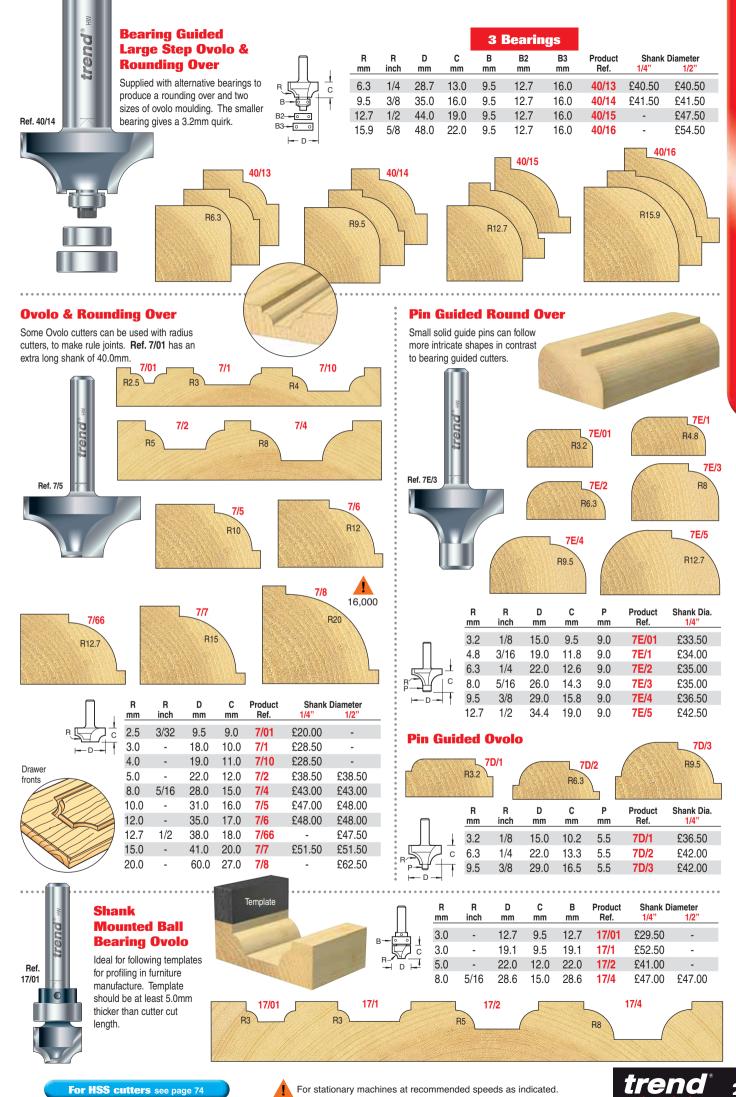

PROFESSIONAL ROUTER CUTTERS



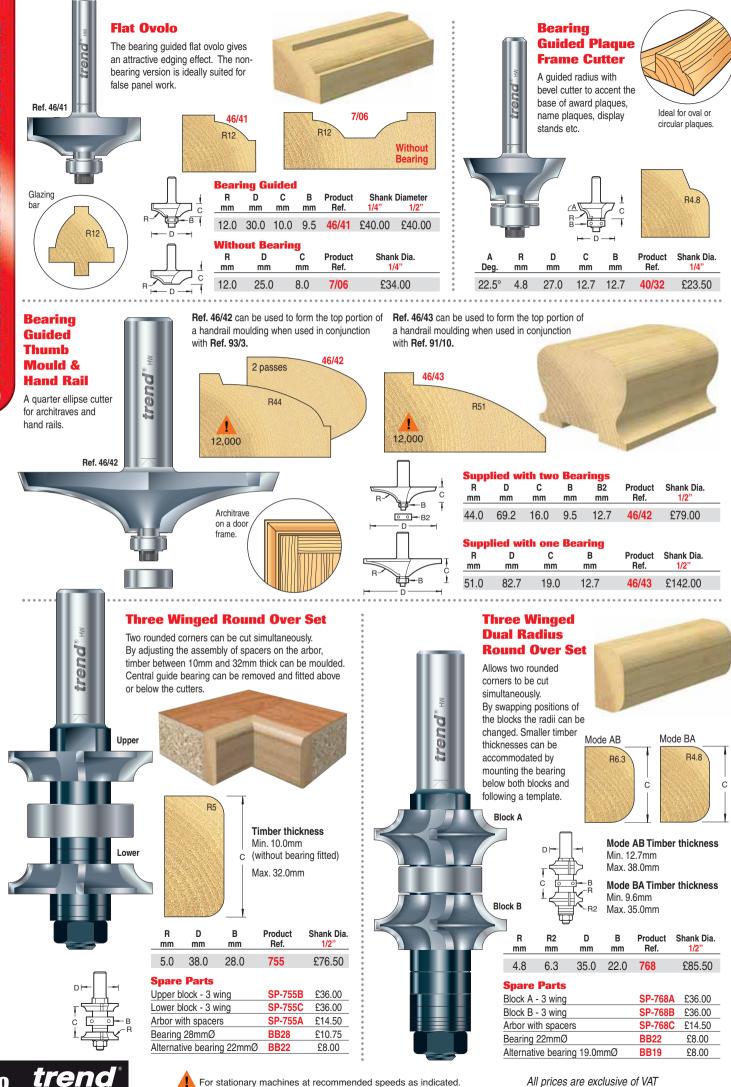


PROFESSIONAL ROUTER CUTTERS

30



For stationary machines at recommended speeds as indicated.


All prices are exclusive of VAT

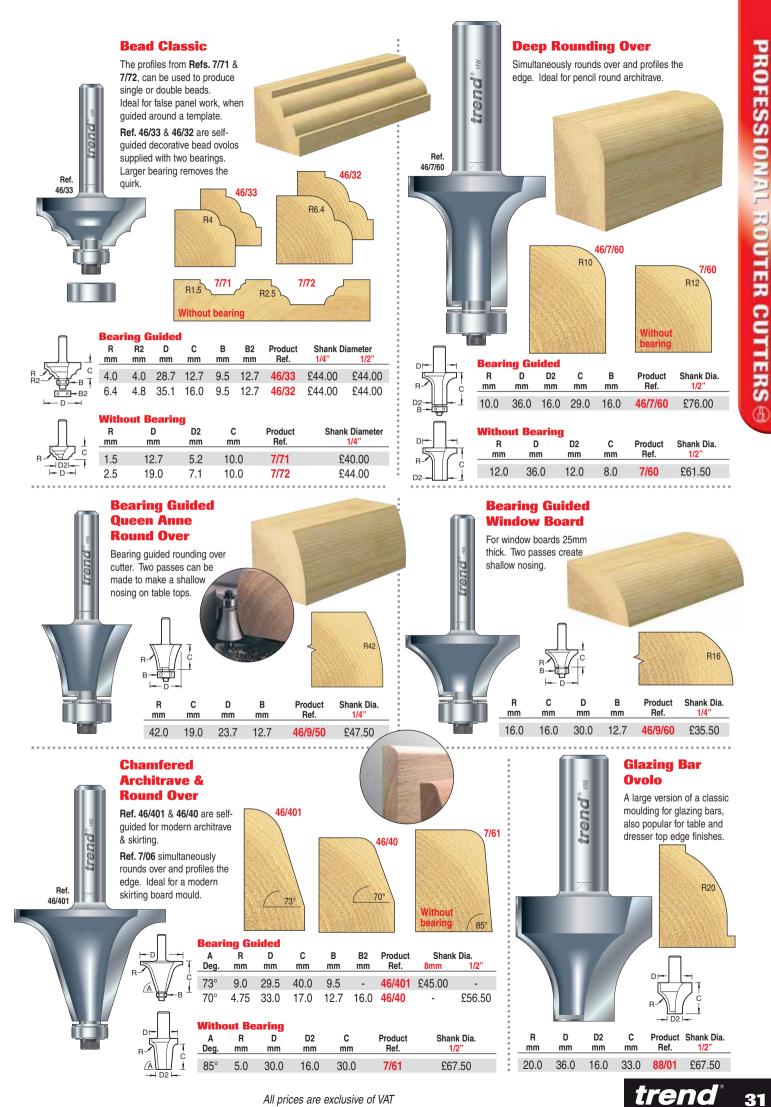


All prices are exclusive of VAT

OVOLO JOINTERS & SCRIBERS

32

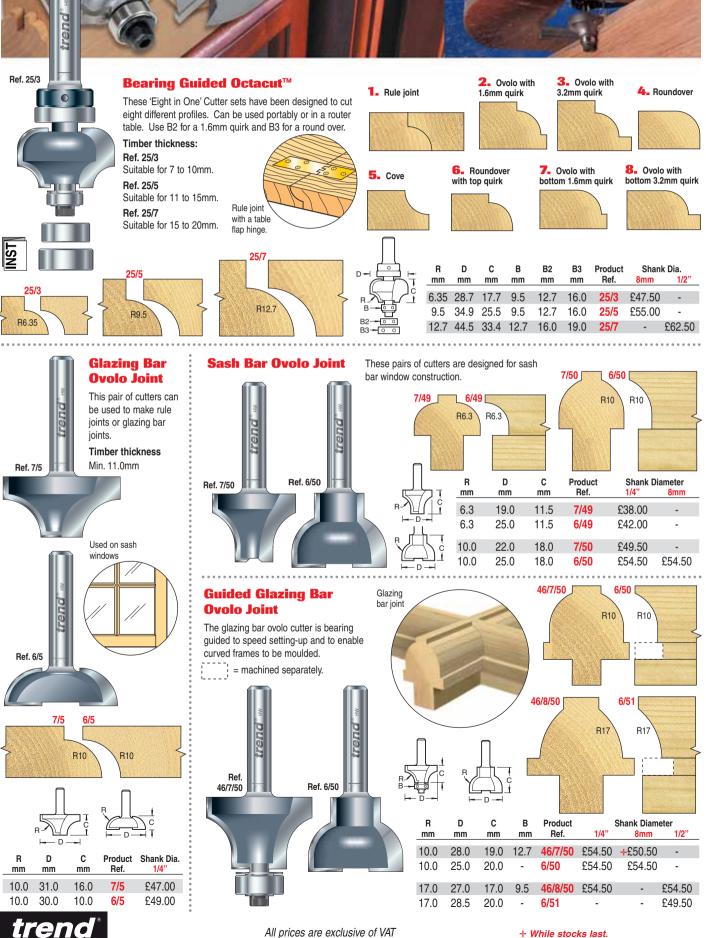

+ While stocks last.

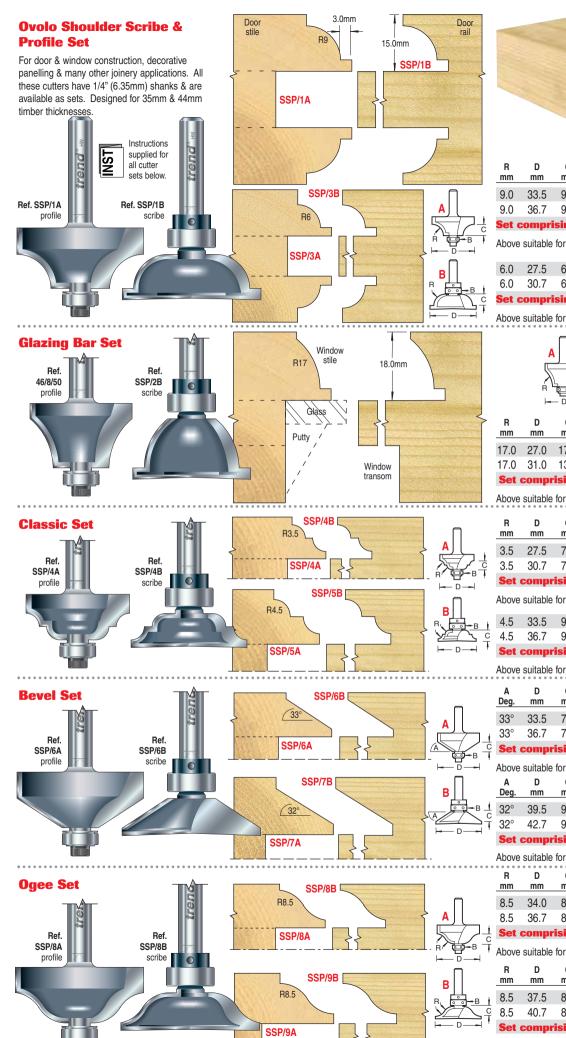

					-
				-	
		21		ES	
					1
			(Jestine)		
n	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
)	33.5	9.0	9.5	SSP/1A	£65.50
)	36.7	9.0	12.7	SSP/1B	£86.50
t i	compri	sing a	above	SSP/1	£141.00
ve	suitable	for 44.0)mm timb	er thickness	
)	27.5	6.0	9.5	SSP/3A	£97.50
)	30.7	6.0	12.7	SSP/3B	£82.00
t (compri	sing a	above	SSP/3	£141.00
ve	suitable	for 35.0)mm timb	er thickness	
		Π		Π	

R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
17.0	27.0	17.0	9.5	46/8/50	£54.50
	31.0	13.0	12.7	SSP/2B	£86.50
	comp			SSP/2	£133.50
	oomp	Joing		001/1	~100.00

Above suitable for 44.0mm timber thickness.

R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"			
3.5	27.5	7.0	9.5	SSP/4A	£101.00			
3.5	30.7	7.0	12.7	SSP/4B	£86.00			
Set	compr	isina	above	SSP/4	£141.00			
Set comprising above SSP/4 £141.00 Above suitable for 35.0mm timber thickness.								

 4.5
 33.5
 9.0
 9.5
 SSP/5A
 £101.00

 4.5
 36.7
 9.0
 12.7
 SSP/5B
 £110.50

 Set comprising above
 SSP/5
 £141.00

Above suitable for 44.0mm timber thickness.

A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
33°	33.5	7.8	9.5	SSP/6A	£93.00
33°	36.7	7.8	12.7	SSP/6B	£80.50
Set	compr	ising	above	SSP/6	£141.00

Above	suitable	for 3	5.0mm	timber	thic	kn	ess.	
	-	-	_		_			-

	A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
ļ	32°	39.5	9.5	9.5	SSP/7A	£97.50
	32°	42.7	9.5	12.7	SSP/7B	£82.00
	Set	compr	ising	above	SSP/7	£141.00

Above suitable for 44.0mm timber thickness.

••	R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
	8.5	34.0	8.0	9.5	SSP/8A	£97.50
	8.5	36.7	8.0	12.7	SSP/8B	£82.00
	Set	compr	ising	above	SSP/8	£141.00
Ť	Above	e suitable	for 35.0)mm timb	er thickness	
	в	D	С	в	Product	Shank Dia

	R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
÷	8.5	37.5	8.0	9.5	SSP/9A	£101.00
ç	8.5	40.7	8.0	12.7	SSP/9B	£86.00
•	Set	compr	ising	12.7 above	SSP/9	£141.00


Above suitable for 44.0mm timber thickness.

All prices are exclusive of VAT




trend

BEAD & REED

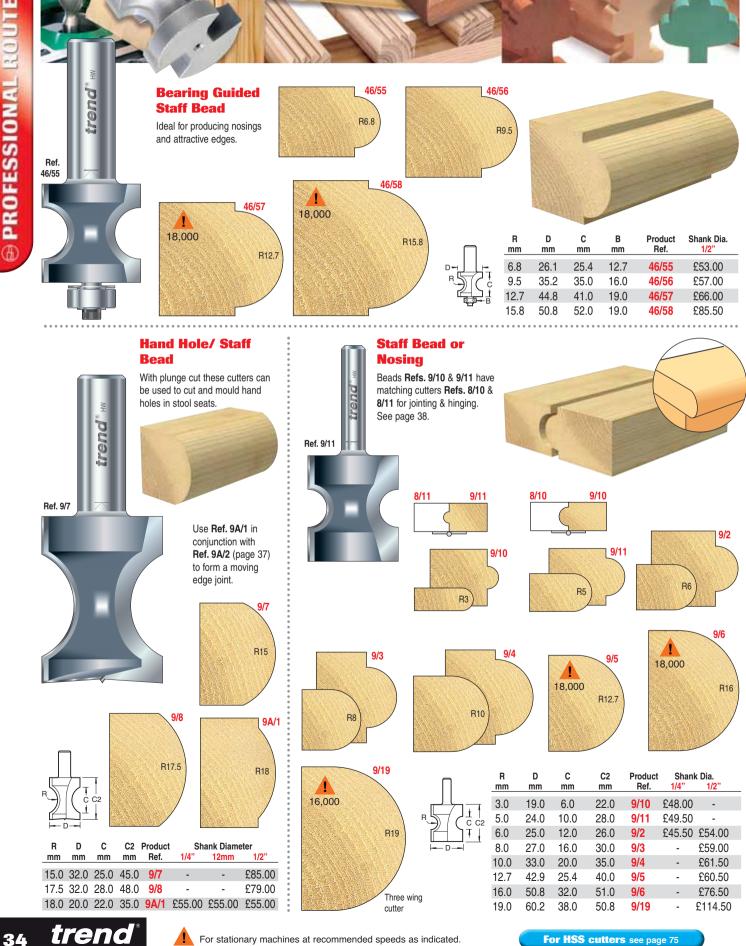



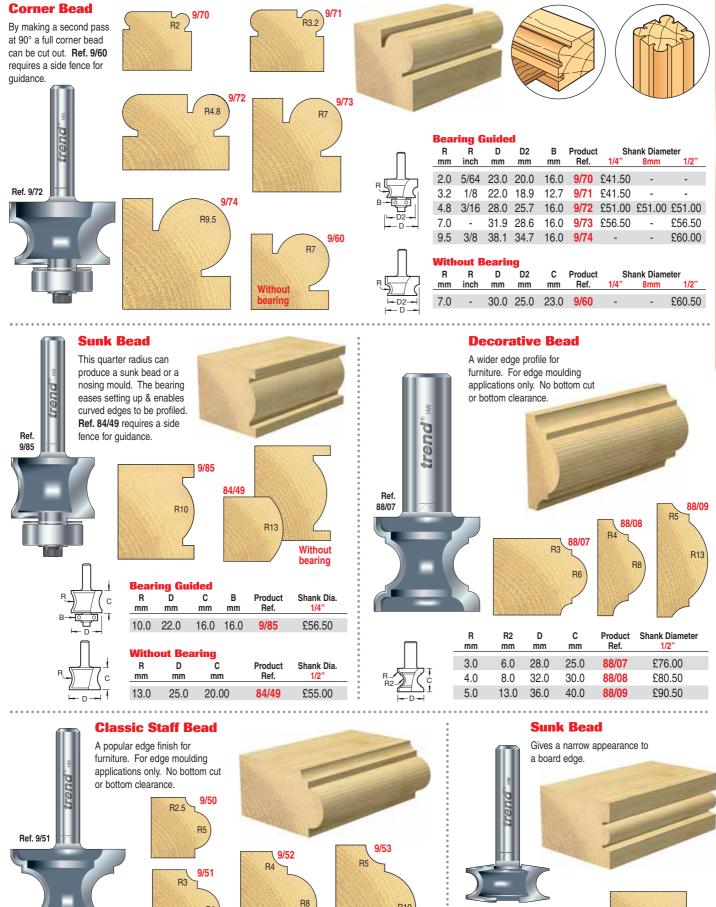

R10

1/2

£73.50

£67.50

R

mm

3.0

D

mm

22.0

С

mm

10.0


Shank Diameter

1/4"

£62.50

£67.50





С

mm

19.0

22.0

27.0

32.0

Product

Ref.

9/50

9/51

9/52

9/53

R6

D

mm

28.4

31.1

36.2

39.7

D2

mm

22.4

24.6

27.3

28.6

R

mm

2.5

3.0

4.0

5.0

R2

mm

5.0

6.0

8.0

10.0



1/4'


£45.00

Product Shank Diameter


Ref.

84/09

R3

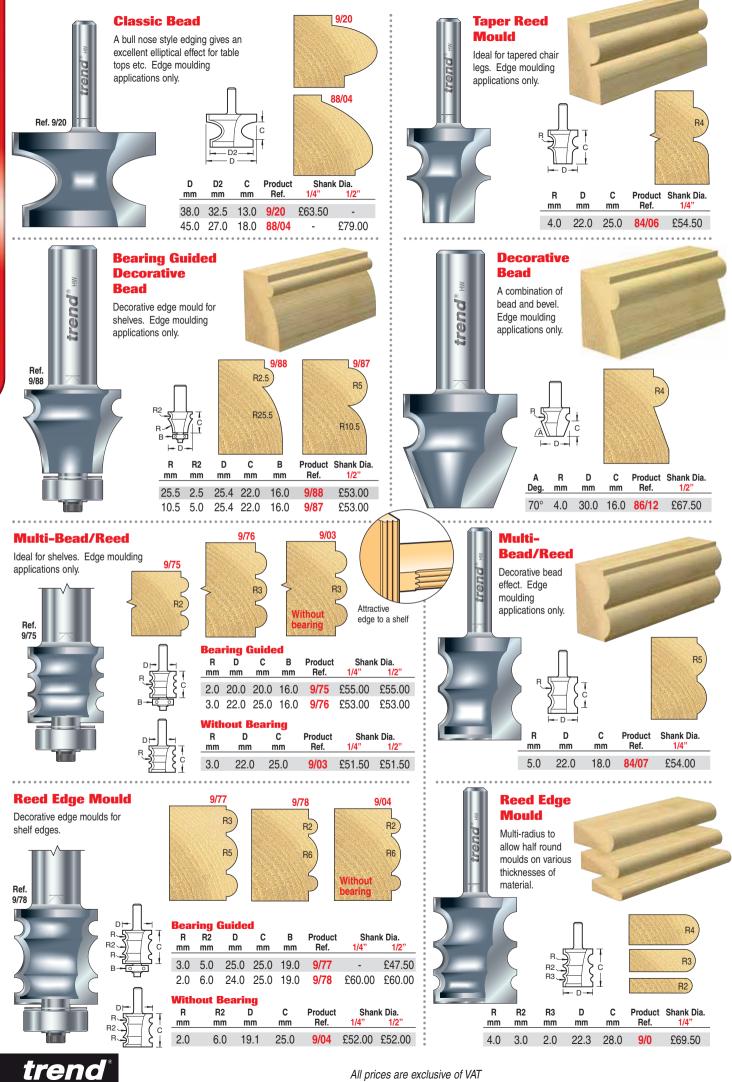

All prices are exclusive of VAT

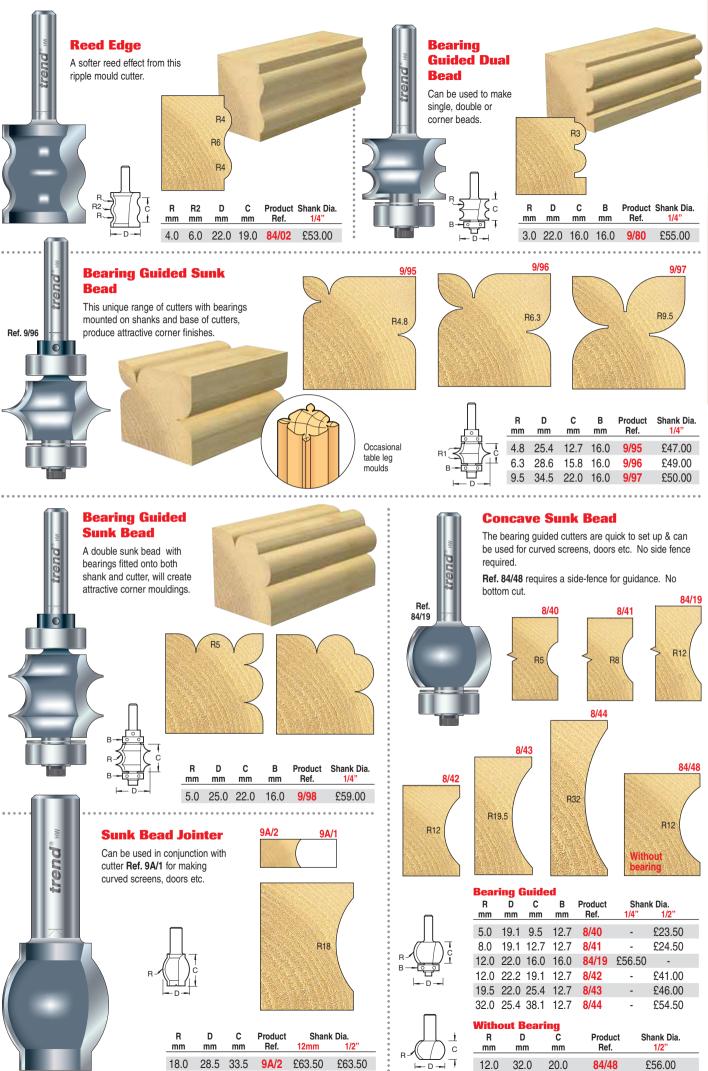

12.0


- D

32.0

20.0

37

trend

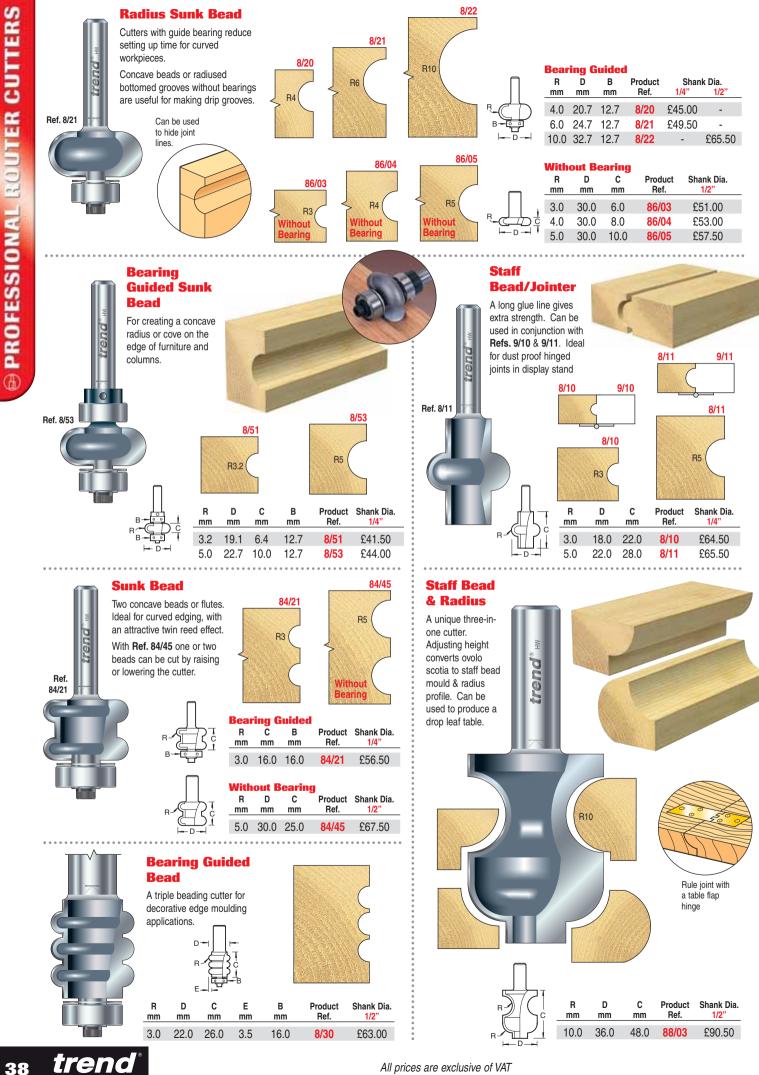


All prices are exclusive of VAT

EDGE MOULDING


49

Victorian

TUNGSTEN CARBIDE

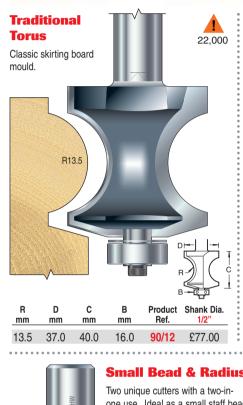


Ref. 9/57

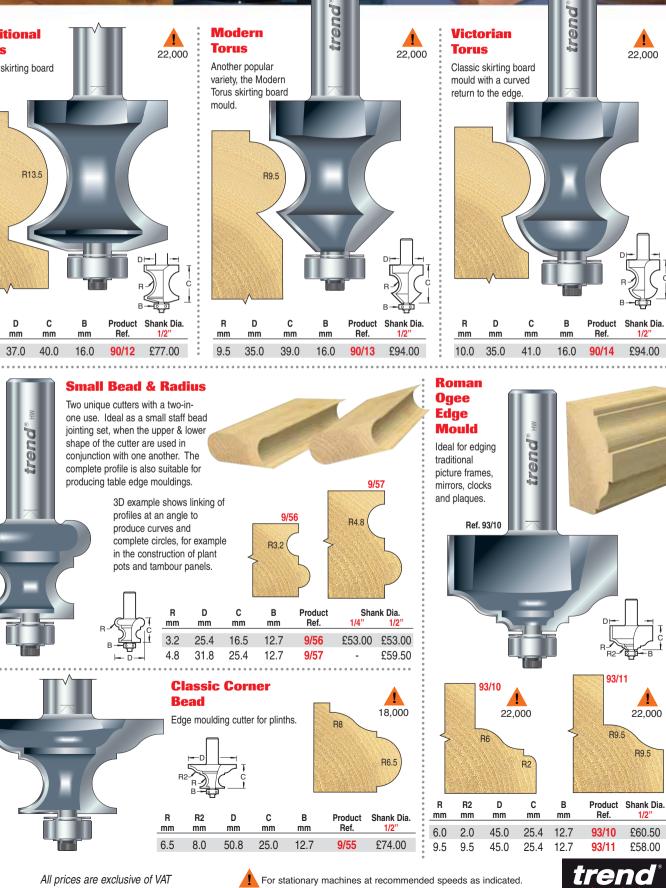




Modern



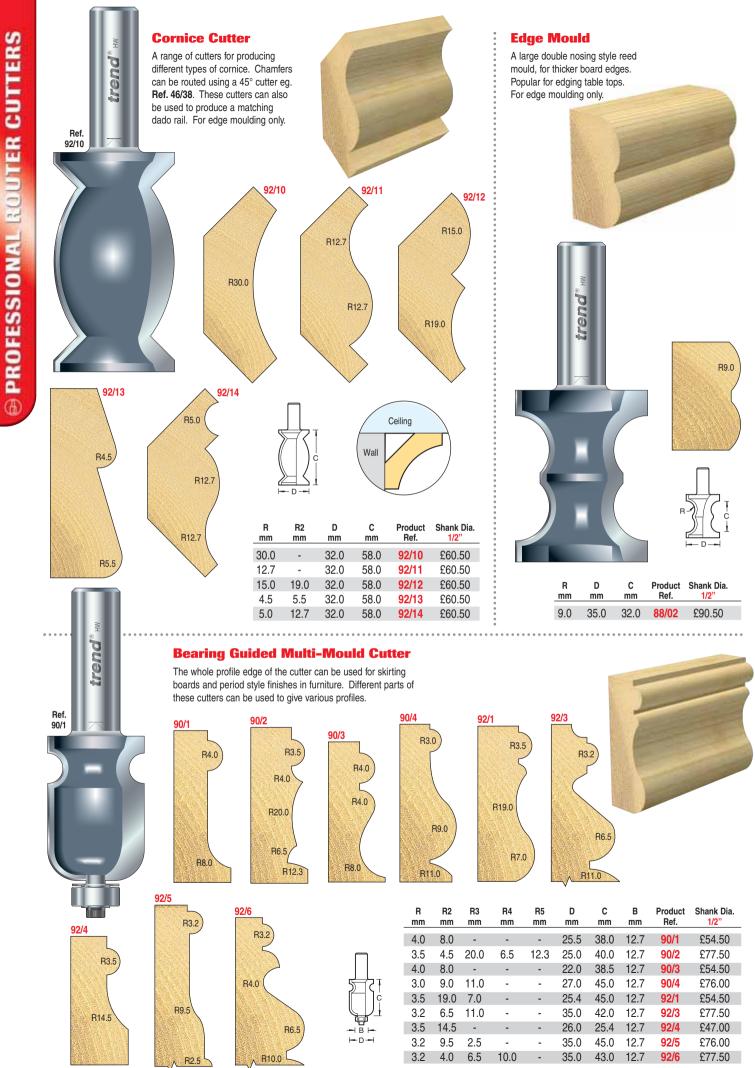

40

trend

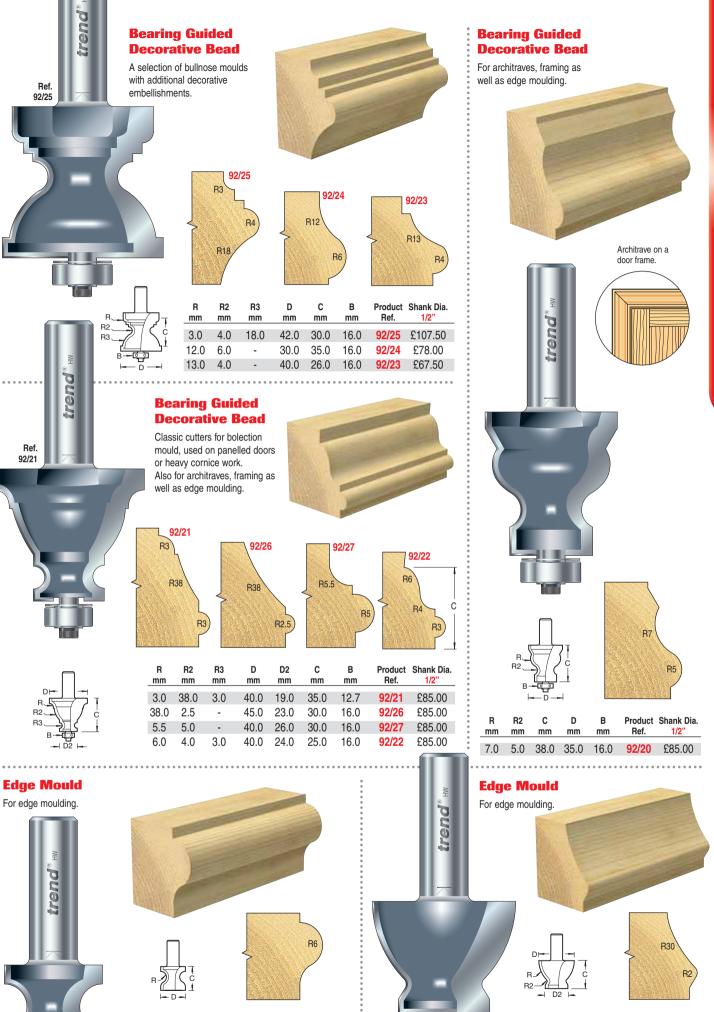

PROFESSIONAL ROUTER CUTTERS

Shank Dia.

£59.50

1/2

R

mm

30.0

R2

mm

2.0

D

mm

38.0

D2

mm

23.5

R

mm

6.0

D

mm

26.0

С

mm

25.0

Product

Ref

84/40



С

mm

30.0

Product

Ref.


84/47

Shank Dia.

1/2

£78.00


trend

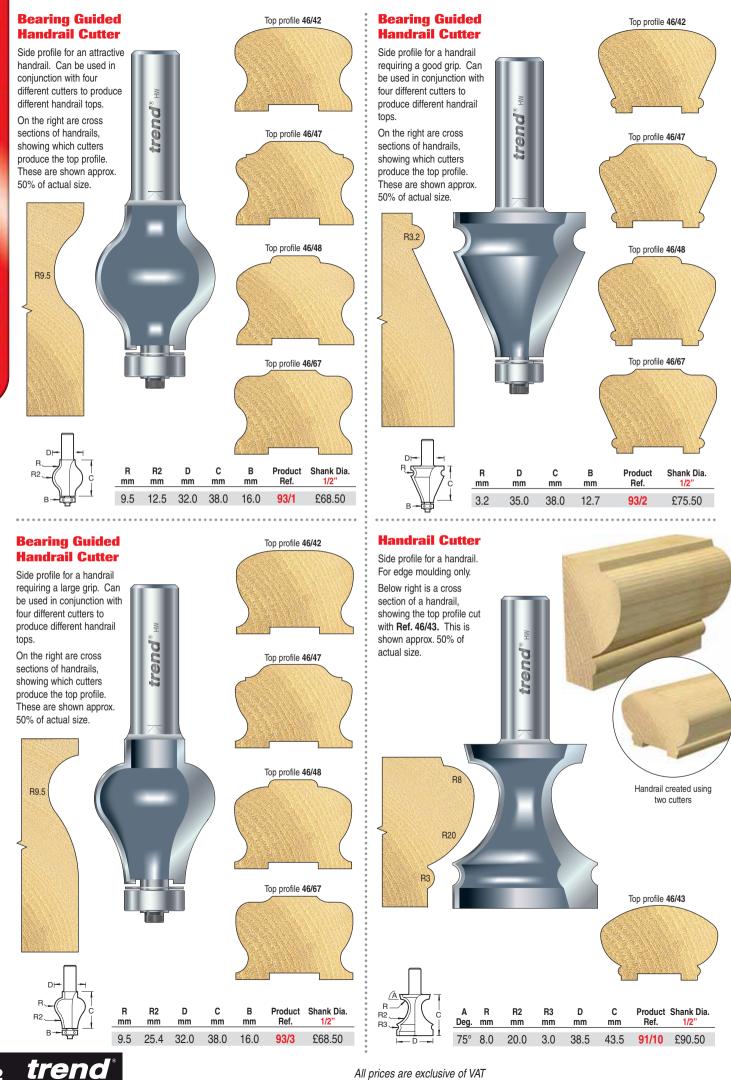

All prices are exclusive of VAT

CAPILLARY & DRAWER PULL



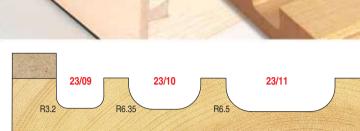



TUNGSTEN CARBIDE TIPPED

Water Channel Bearing Guided * Capillary The water channel cutters Groover produce radiused rebates and grooves. Suitable for plunge A capillary groove for sills & cutting. window sections. By changing to a larger bearing, a shallower cut can 23/1 23/2 23/3 23/4 be obtained. R5 R5 R5 R5 Supplied with Shank Mounted Bearing R8 R D С в Product Shank Dia. 1/4" 1/2' mm mm mm mm Ref. 3.2 12.7 12.7 12.7 23/09 £30.50 ŧ. С 6.35 19.1 16.0 19.1 23/10 £48.00 £48.00 Ref. 6.5 28.6 16.0 28.6 23/11 £49.50 23/09 D С Product Shank Dia R В mm mm mm mm Ref. 1/4" d Bearing Without Shank Mour 8.0 28.7 £56.50 It is advisable with Refs. 8.0 12.7 84/24 R р С Product Shank Dia. Ref. 23/09 & 23/10 shank mm mm mm 1/2' mounted bearing cutters 5.0 16.0 25.0 23/1 £41.00 **Drawer Pull** that the template is 5mm 5.0 18.0 25.0 23/2 £41.00 Radius thicker than the cut length £44.50 5.0 22.0 25.0 23/3 of the cutter. The long cut depth of 5.0 25.0 25.0 23/4 £51.50 these cutters allows trend them to produce under-84/96 **Drawer Pull Cutters Decor Edge** cut finger grooves. R2 An initial cut with a straight cutter is A small decorative edge cutter. required to produce this effect Ref. shown on the right. 84/82 irend For Ref. 84/96 use in two passes from left & right to cut a protruding R1 5 grip handle. Ref. 84/94 84/94 R4 84/82 R2 R2 R1 18.000 R6 84/93 18,000 84/95 R8 84/92 84/83 С R R2 D D2 Product Shank Dia. mm mm mm mm mm Ref. 1/2 B12.5 1 - D 1.5 22.0 £72.50 2.0 17.0 84/96 . 4.0 19.0 £78.50 13.0 84/94 R D С Product Shank Dia. R2 5.0 2.0 84/93 45.0 24.0 22.0 £92.00 mm mm Ref. mm 1/2 R R2 D C Product Shank Dia. 6.0 38.0 22.0 84/95 £93.50 mm mm mm mm Ref. 1/4 D2 17.0 £74.50 --11.0 22.0 32.0 84/82 8.0 2.0 44.8 24.0 25.4 84/92 £103.00 2.0 8.0 24.0 16.0 **84/10** £55.00

£78.00

12.5

25.0


32.0


84/83

trend

RADIUS, COVE & CAVETTO

ТС

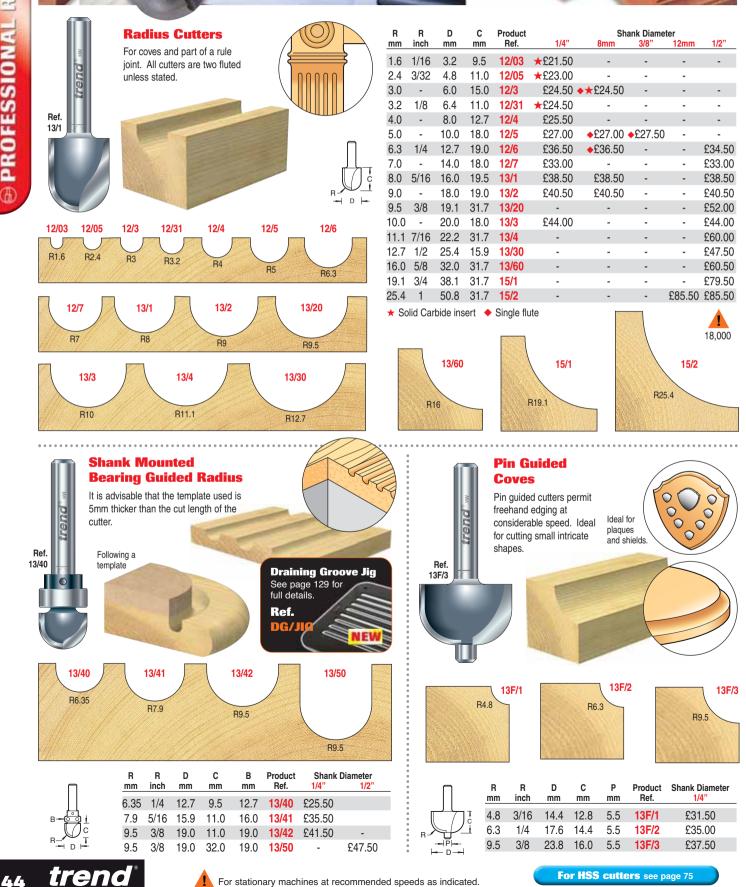

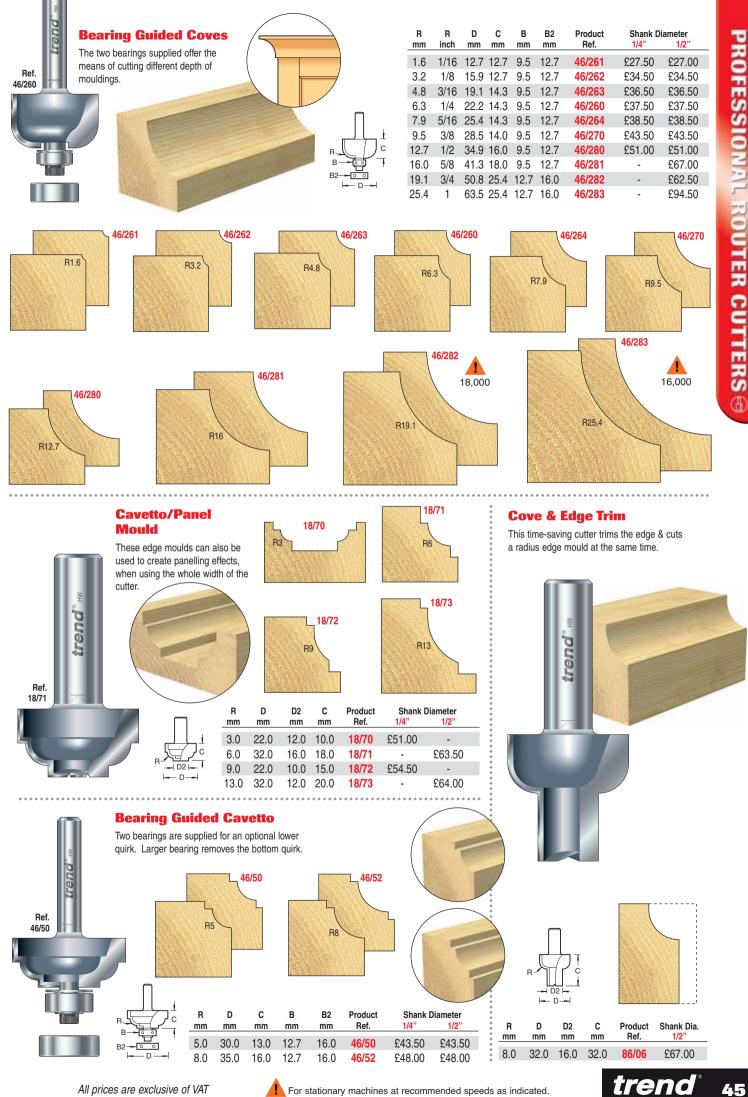

For stationary machines at recommended speeds as indicated.

OGEE & CLASSIC MOULD

Ogee **Cutters** Cutters for false panels or edge . moulds.

Curved work


Ref.

19/1

possible in fixed head router & copy follower.

Ref.

46/60



R

mm

2.5

3.0


4.0

4.7

7.2

mm

9.5





19/61

19/2

R7.2

R3



Supplied with two bearings. The larger bearing removes the bottom quirk. Ref. 46/67



R4.5

R4



trend

TUNGSTEN CARBIDE

46/66

R4.8

R6.3

46/290

R9.5

Shank Diameter

8mm

-

46/30 £46.00 £46.00 £46.00

R9 !

1/4"

£51.00

18,000

1/2'


£51.00

£74.50

Bearing Guided Quirk Topped Ogees

-D2 - D---

Self-guiding cutters, with the facility to change the profile by fitting a larger bearing & varying the depth. Supplied with two bearings. The larger bearing removes the bottom quirk.



С

mm

13.5

17.5

25.5

R4

B2

mm

12.7

12.7

12.7

curved sections to be

Bearing allows

routed

В

mm

9.5

9.5

9.5

Product

Ref.


46/60

46/61

46/62

-

46/60 R4 46/62 18,000 R9.5



£52.50

£83.00

R4

R R2

mm mm

4.0

6.0 5.0

9.5

C

46/30

R4

4.0

9.5

D С

mm mm

29.0 12.7

34.9 17.5

51.0 24.0

46/67 R9.5 R9.5 С

R mm	R2 mm	D mm	C mm	B mm	B2 mm	Product Ref.	Shank I 1/4"	Diameter 1/2"
4.5	4.0	28.5	12.7	9.5	12.7	46/65	£44.00	£44.00
6.3	4.8	35.0	17.5	9.5	12.7	46/66	£47.00	£47.00
9.5	9.5	63.0	20.0	9.5	12.7	46/67	-	£92.00

46/29

R5

B2

mm

12.7

12.7

12.7

в

mm

9.5

9.5

9.5

Bearing Guided Classic Style

Self-guiding cutters with the facility to change the profile by fitting a larger bearing & varying the depth. Supplied with two bearings. The larger bearing removes the bottom quirk.

R D

mm mm

6.3 41.3

9.5

4.0 34.9

57.0




Ref.

46/30

B2-•





B

B2-

– D


For HSS cutters see page 75

Product

Ref.


46/29

46/290

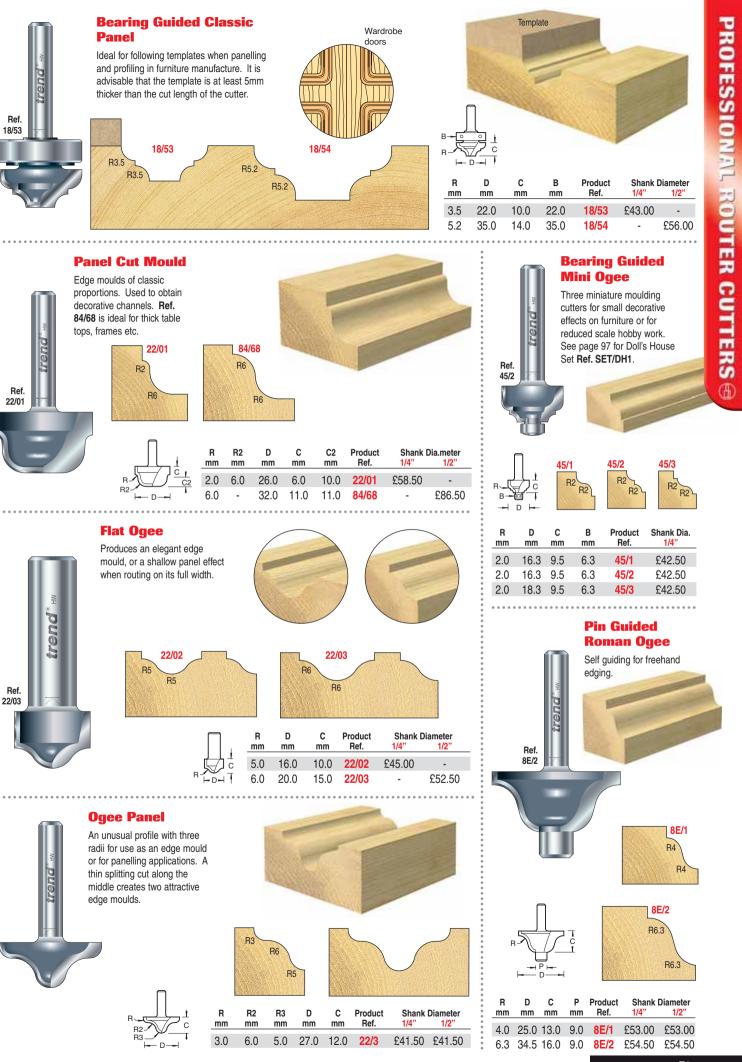

All prices are exclusive of VAT

trend

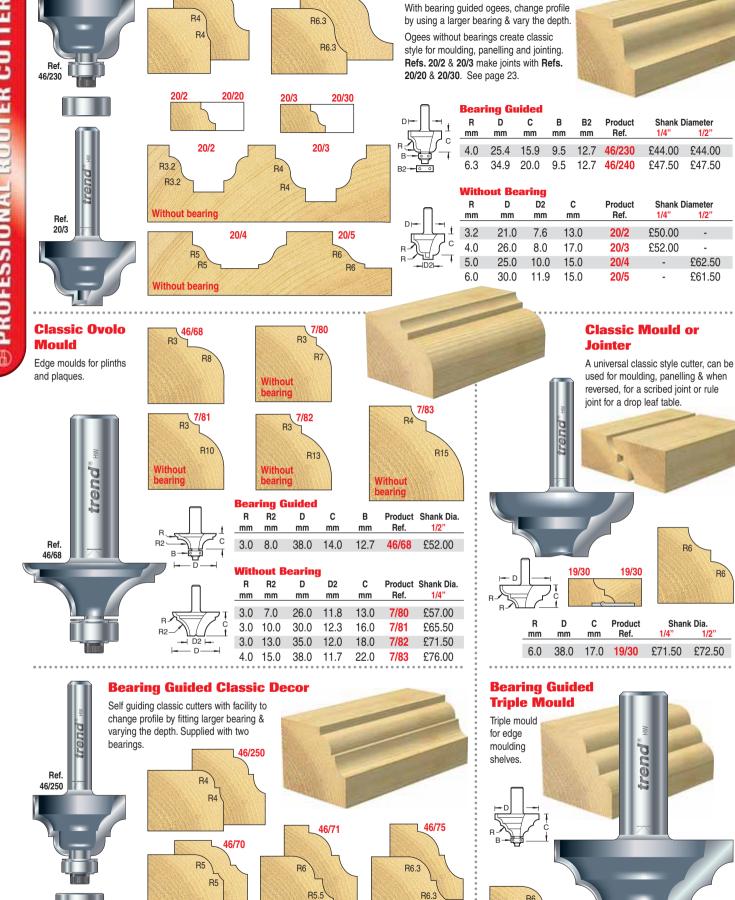

46/240

Roman Ogees

46/230



R R2 D

mm mm

4.0

5.0 5.0

6.0

6.3

С

mm mm

25.4 16.0

32.0 12.7

38.0 16.0

35.0 22.0

4.0

5.5

6.3

в

mm

9.5

12.7

12.7

9.5

B2

mm

12.7

16.0

16.0

12.7

Product

Ref.

46/250

46/70

46/71

46/75

All prices are exclusive of VAT

Shank Diameter

1/2

£44.00

£42.50

£47.50

£49.50

1/4"

£44.00

£42.50

£47.50

£49.50

R6

R

mm

6.0

RF

D

mm

47.3

Re

С

mm

23.8

В

mm

12.7


Product

Ref.

46/46

Shank Dia.

£57.00

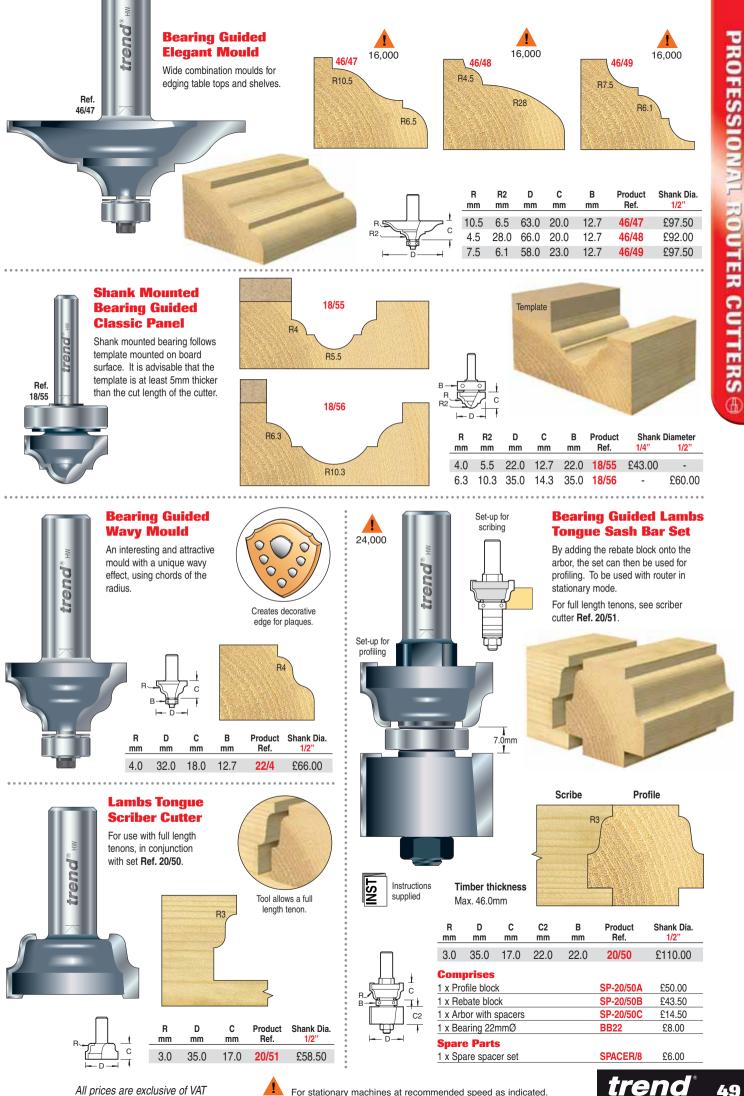

All prices are exclusive of VAT

For stationary machines at recommended speed as indicated.

L ROUTER CUTTERS PROFESSIONAL

Router

only.

.

table use

PROFILE SCRIBING

TUNGSTEN

Combination

trend

The classic method of producing cabinet panelled door and drawer fronts is made easy with these Profile Scriber sets.

18.000

NST

Instructions supplied

When using PSC sets at

thickness, the height of the

top quirk may be reduced.

the minimum material

- With the combination type, components are rearranged on the arbor to cut the profile or the scribe.
- The Easyset[™] system works by altering the height of the cutter. See opposite page for full details.
- For a range of complimentary panel mould cutters please see pages 53-56 for Raised Panel Moulding.


8mm shank tools


are for use with

medium & heavy

duty routers only.

Ref. PSC/2 **Bearing Guided** Set-up for Classic Set One piece scribing **NST** R5 9 Timber thickness: With 6.3 groover Min. 21.0mm R С C2 Shank Dia. D Product Max 26 5mm mm mm mm mm Ref. 8mm 1/2With 4.0 groover 5.9 46.0 4.0 PSC/2 £94.50 £94.50 15.0 Min. 18.0mm Max. 22.0mm 5.9 46.0 15.0 6.3 **PSC/20** £94.50

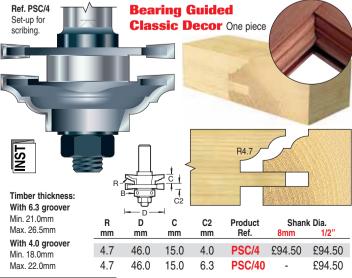

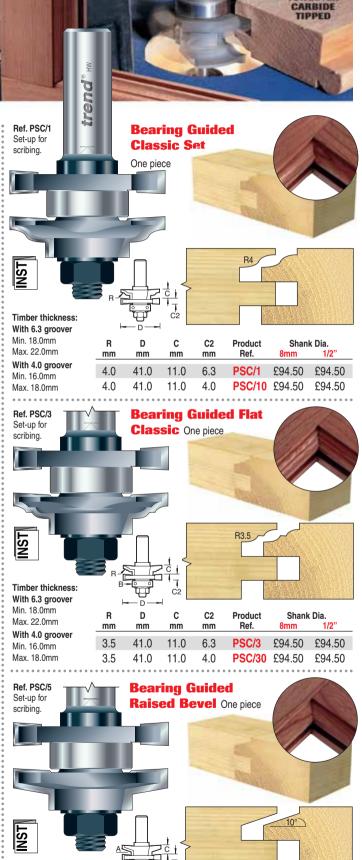

Timber thickness:	в- Н				
With 6.3 groover Min. 18.0mm Max. 22.0mm	A Deg.	D mm	C mm	C2 mm	
With 4.0 groover Min. 16.0mm	10°	41.0	11.0	6.3	
Max. 18.0mm	10°	41.0	11.0	4.0	

trend 50



Router Table use only at recommended speeds as indicated.

All prices are exclusive of VAT

Product

Ref.

PSC/5

PSC/50

Shank Dia.

8mm

£94.50

£94.50

1/2'

£94.50

£94.50

Easyset™

All in one system for quick setting

- These tools produce the same type of joint & use the same components as the combination PSC sets.
- Both parts of the joint are cut by only changing the cutter height.
- No re-assembly of parts is required to convert the tool from scribing mode to profiling mode & vice-versa.
 - Router table use only.

18.000

Instructions

supplied

When using PSC

minimum material


height of the top

thickness, the

quirk may be


sets at the

INST

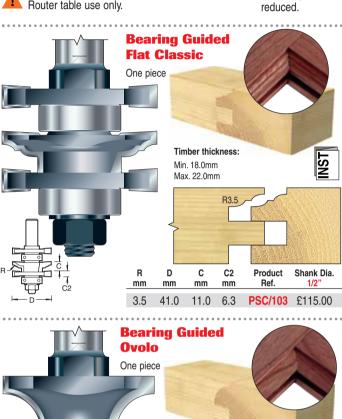




INST



Spare Parts

oparo i arto			
Profile block:	for PSC/1, 10 etc.	SP-PSC/1A, 10A etc.	£70.00
	for PSC/106 & 107	SP-PSC/106A & 107A	£70.00
Scriber block:	for PSC/106 & 107	SP-PSC/106B & 107B	£70.00
Groover:	for PSC/1, 3, 5,101,102,103	SP-34/70TC	£21.50
	for PSC/2 & 4	SP-34/71TC	£21.50
	for PSC/10, 30 & 50	SP-34/72TC	£21.50
	for PSC/20 & 40	SP-34/73TC	£21.50
	for PSC/106 & 107	SP-34/73ATC	£21.50
Bearings for all s	sets	BB22	£8.00
Arbor	for PSC/1 to 50	33/30 x 8mm	£6.50
		33/30 x 3/8"	£7.00
		33/30 x 12mm	£7.00
		33/30 x 1/2"	£7.00
Arbor	for PSC/101 to 103	33/31 x 1/2"	£12.50
Arbor	for PSC/106 & 107	33/32 x 1/2"	£12.00
Spacer set		SPACER/8	£6.00

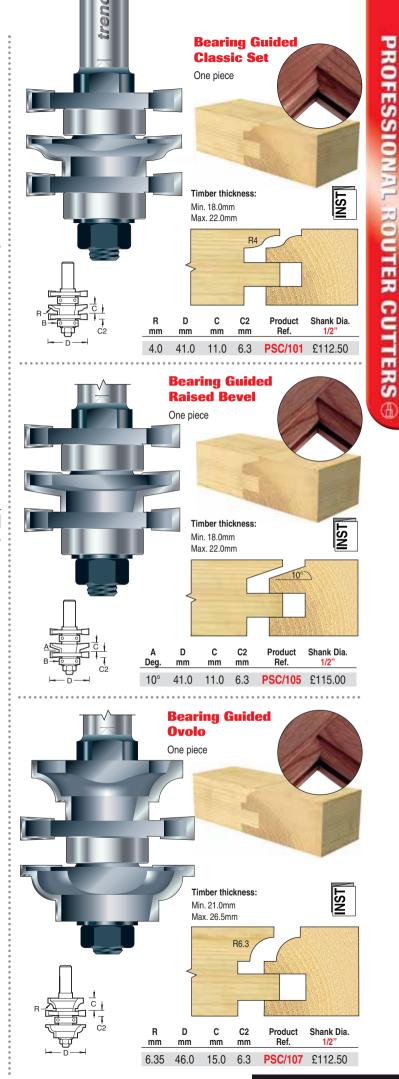

trend



Bearing Guided Profile Scriber Multi-Set

When the extra two profile blocks are interchanged, two more types of profile scriber joints can be produced. By using the extra groover, a 1/4" tongue & groove joint can be made. All supplied in a foam box.

8mm shank tools are for use with medium and heavy duty routers only.


A When using PSC sets at the minimum material thickness, the height of the top quirk may be reduced.


Instructions

supplied

18.000

<u>LSN</u>

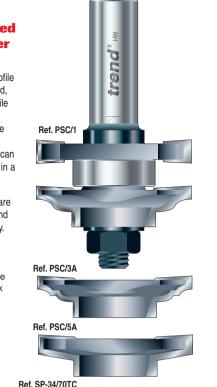

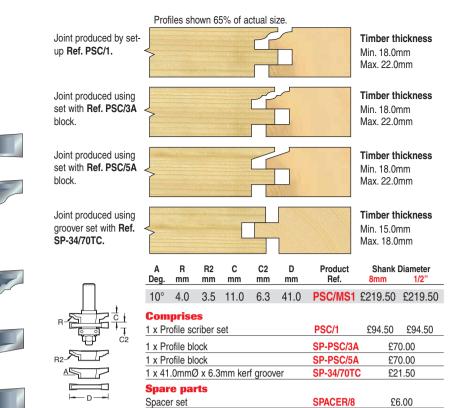

Frame & Panel Door Construction

Panelled door frames are made up of two vertical stiles and two horizontal rails. The inside edge of the stiles and rails are grooved to take the panel edge and the rail end tenon.

Moulded Edges

The inside edges of the stiles and rails are grooved and moulded, the groove being both deep enough to accept the edge of an infill panel and the stub tenon to form the frame joints.

Top and Bottom Rails

Simple doors have frame rails and stiles the same width, but a more balanced appearance is achieved with a wider bottom rail. The inside edge of the top and/or bottom rail can also be shaped.

- Stiles

These must be strong enough to take the hinges, catch and handle.

Muntin

Additional strength is achieved with the sub-division of horizontal and vertical rails. Wide doors normally have at least one central vertical member (muntin) to improve their appearance, provide additional strength and reduce the panels to more manageable sizes.

When joining sections to produce solid wood panels, alternate the growth ring direction of adjacent boards to prevent cupping.

Glued panel finished to

Infill Panels

The panels can be made from solid

composite board. They can be cut

as flat panels or with a traditional

fielded panels) The mould on the

panel can vary from a plain bevel to

a more elaborate decorative profile.

raised central area (raised and

timber, veneered plywood or


consistent thickness.


Assembly

Combination sets consist of an arbor, cutter block, groover and bearing, and are supplied assembled in the scribing mode. The order of these parts will need to be rearranged to convert the tool into the profiling mode. The cutter block and groover should always be assembled at 90° to each other to reduce the cutting impact of the tool. Spare shims are supplied with each set to provide adjustment for the tightness of the joint, this will be required if the tool has been re-sharpened. Full assembly instructions are provided with each set.

Cutting the Scribe


The timber of the rails or muntin should be cut square to length and mounted face up in a work-holder or mitre fence to ensure a safe and accurate cut. The back fence should be set level with the bearing guide to automatically give the correct depth of cut. A spelch block, fitted to the work-holder of the mitre fence will prevent break-out of the timber. Adjust the height of the set according to the thickness of the timber.





Cutting the Profile

Switch off the power to the router at the source. Leaving the tool set in the machine, re-assemble the components of the set into the profiling mode. With the sections to be machined face down, machine all profile edges.





Pushblock	NEW
See page 144 for	300
full details.	P -
Ref.	
PUSHBLOCH	14





When moulding the panel, begin by cutting across the end grain first. Any break out will then be removed when cutting with the grain.



Profile Scribed Joint

The end of the rails are cut to form

match the decorative rail/stile edge


the joint tenon and scribed to

moulding.

All prices are exclusive of VAT




RAISED PANEL MOULDING



- These Raised Panel cutters run best at lower speeds and match our range of profile scribers.
- All are suitable for use on natural timber and MDF.
- A 8mm shank tools are for use with medium and heavy duty routers only.
- A Router table or overhead router use only.
- * See Panel Door Set page 56.

Radiused

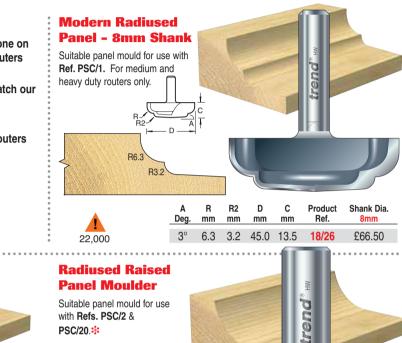

D2

mm

22.0

R

mm

14.0

D

mm

50.0

С

mm

14.0

Product

Ref.

18/21

Shank Dia.

£80.50

trend

53


1/2

PROFESSIONAL ROUTER CUTTERS

TUNGSTEN CARBIDE

Panel Raiser - 8mm Shank Suitable panel mould for ienc use with Ref. PSC/3. For medium & heavy duty routers only. **R14**



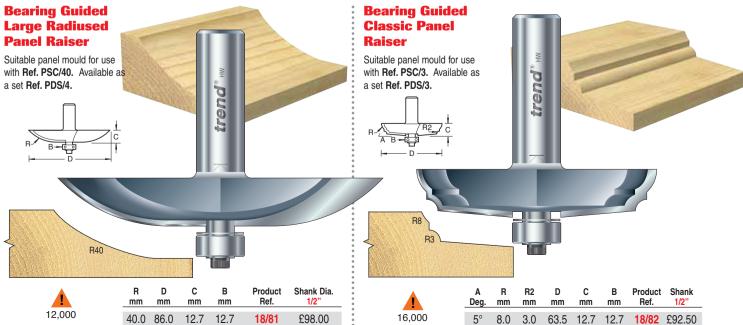


PSC/20.*


R14

For stationary machines or portable routers mounted in a table, at recommended speeds as indicated.



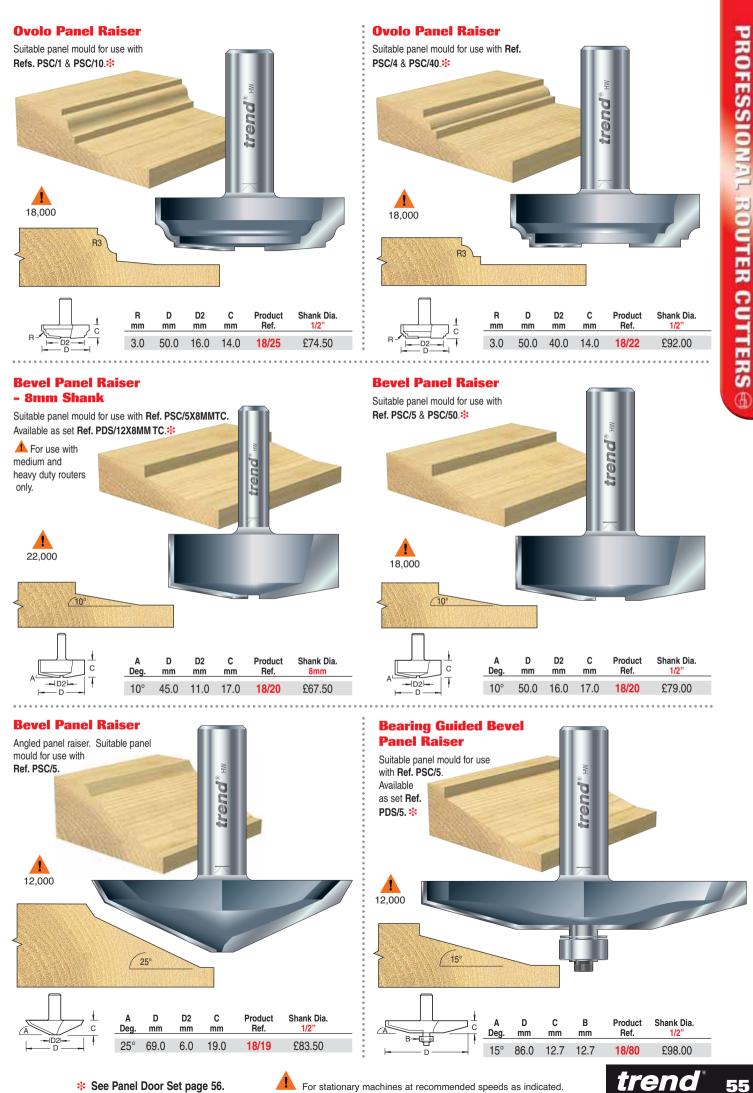


* See Panel Door Set page 56.

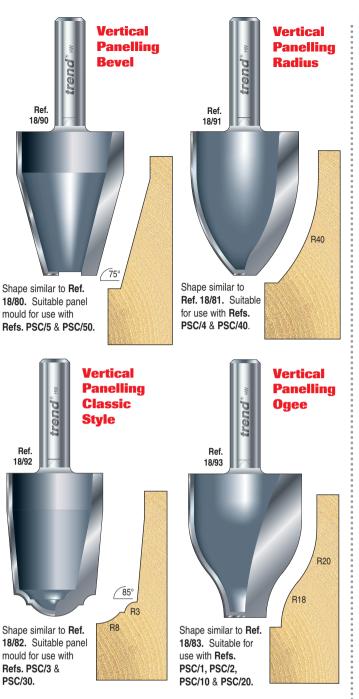

A 8mm shank tools are for use with medium and heavy duty routers only.

Π	Α	R	R2	D	с	Product	Shan	k Dia.
	Deg.	mm	mm	mm	mm	Ref.	8mm	1/2"
	75°	-	-	28.5	38.0	18/90	£66.00	£66.00
	-	40.0	-	28.5	38.0	18/91	£66.00	£66.00
	85°	3.0	8.0	25.4	38.0	18/92	£66.00	£66.00
□=_D-=	-	20.0	18.0	30.0	38.0	18/93	£66.00	£66.00



Why use Vertical Panel Mould Cutters?

- When 8mm collet medium duty router is available (with no table).
- When there is no variable speed facility on router.
- Cost of cutter is important.

Shaped work is not required. When used in a portable machine the panel will need to be clamped vertically with an extra support base for the router.

PANEL DOOR SETS

Bearing Guided Panel Door Sets

These panel door sets each consist of one profile scriber cutter and a matching bearing guided panel cutter. Details of each cutter can be found on their relevant pages. Two shank sizes are offered either 8mm and 1/2".

Amm shank set should only be used with a medium or heavy duty router.

Acouter table use only.



A Please note:

The panel raising cutters should be run at a max. speed on a stationary machine as follows: **Refs. 18/82X1/2** & **18/83X1/2** - 16,000 RPM **Refs. 18/80X1/2** & **18/81X1/2** - 12,000 RPM **Refs. 18/20X8MM** & **18/24X8MM** - 22,000 RPM


A When using PSC sets at the minimum material thickness, the height of the top quirk may be reduced.


Instructions supplied


1/2" Shank Panel Door Sets

Refs. PDS/1 to PDS/5X1/2TC Profiles shown 50% of actual size. Timber thickness

Min. 18.0mm Max. 22.0mm








Contents	Product Ref.	Shank Dia. 1/2"
PSC/1 & 18/83	PDS/1	£164.50
PSC/20 & 18/83	PDS/2	£168.00
PSC/3 & 18/82	PDS/3	£167.50
PSC/40 & 18/81	PDS/4	£177.00
PSC/5 & 18/80	PDS/5	£172.50


ΡM	trend® Hu
ור	

Ref. PDS/1

8mm Shank Panel Door Sets

Refs. PDS/10 to PDS/12X8MMTC Profiles shown 50% of actual size. Timber thickness Min. 18.0mm Max. 22.0mm






Product Ref.	Shank Dia. 8mm
PDS/10	£144.00
PDS/11	£144.00
PDS/12	£144.00
	Ref. PDS/10 PDS/11



PANEL MOULD

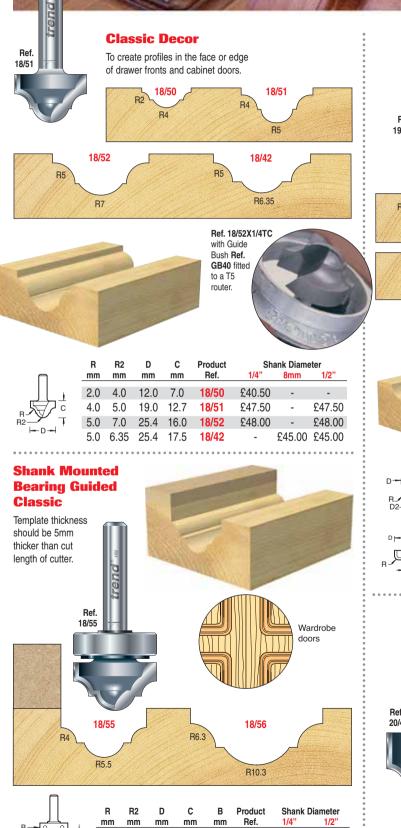

A HERE A

R

R2

4.0

6.3 10.3

С

Ŧ

⊢- D ---

5.5

22.0

35.0 14.3

12.7

and the second s	-	100			- P	1000	5 - A.
	the face	e profiles or edge ronts and doors.	of d	Ref. 8/01	Panel used templa work of	le Oge raisers car with guide l ates for dec on panel do	n be bush corative
R3.2	B/01			R3.2	18/1		
			I	76	18/02		
2							
and the second		E	1				
	R	D mm	D2 mm	Cmm	Product Ref.	Shank I 1/4"	Diameter 1/2"
	mm 2.5 3.0	mm 9.5 12.0	mm 2.0 3.0	mm 8.0 9.5	Ref. 19/60 19/61	1/4" £36.50 £40.00	1/2"
	mm 2.5	mm 9.5	mm 2.0	mm 8.0	Ref. 19/60	1/4" £36.50	1/2"
	mm 2.5 3.0 4.0 3.2	mm 9.5 12.0 19.0 25.0	mm 2.0 3.0 5.0 10.0	mm 8.0 9.5 11.0 9.5	Ref. 19/60 19/61 19/62 18/01	1/4" £36.50 £40.00	1/2" - - £50.00
	mm 2.5 3.0 4.0	mm 9.5 12.0 19.0	mm 2.0 3.0 5.0	mm 8.0 9.5 11.0	Ref. 19/60 19/61 19/62	1/4" £36.50 £40.00 £47.50	1/2" - -
	mm 2.5 3.0 4.0 3.2 6.0 Cla Pa To cla in th edge	mm 9.5 12.0 19.0 25.0 35.0 40.0 assic nel reate proceed for the proceed of draw is and call call the proceed of the p	mm 2.0 3.0 5.0 10.0 12.5 16.0	mm 8.0 9.5 11.0 9.5 9.5	Ref. 19/60 19/61 19/62 18/01 18/1 18/02	1/4" £36.50 £40.00 £47.50	1/2" - - £50.00 £51.00
	mm 2.5 3.0 4.0 3.2 3.2 6.0 Cla Pa To cl in th edge front	mm 9.5 12.0 19.0 25.0 35.0 40.0 assic nel reate proceed for the proceed of draw is and call call the proceed of the p	mm 2.0 3.0 5.0 10.0 12.5 16.0	mm 8.0 9.5 11.0 9.5 20.0	Ref. 19/60 19/61 19/62 18/01 18/1 18/02 20 R5 21 6	1/4" £36.50 £40.00 £47.50 £50.00 - - 0/4	1/2" - - £50.00 £51.00
	mm 2.5 3.0 4.0 3.2 3.2 6.0 Cla Pa To cl in th edge front door	mm 9.5 12.0 19.0 25.0 35.0 40.0 assic nel reate proceed for the proceed of draw is and call call the proceed of the p	mm 2.0 3.0 5.0 10.0 12.5 16.0	mm 8.0 9.5 11.0 9.5 20.0	Ref. 19/60 19/61 19/62 18/01 18/1 18/02 20 R5 21 6	1/4" £36.50 £40.00 £47.50 £50.00 - - 0/4	1/2" - - £50.00 £51.00
	mm 2.5 3.0 4.0 3.2 3.2 6.0 Cla Pa To cla front door	mm 9.5 12.0 19.0 25.0 35.0 40.0 assic nel reate proc e face or e of draw is and ca s.	mm 2.0 3.0 5.0 10.0 12.5 16.0 offiles er binet	mm 8.0 9.5 11.0 9.5 20.0 F F D2	Ref. 19/60 19/61 19/62 18/01 18/1 18/02 20 6 21 6 21 6 21 6 21 6 21 6 21 6 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 21 7 7 7 7 7 7 7 7 7 7 7 7 7	1/4" £36.50 £40.00 £47.50 £50.00 - - 0/4 0/4 0/5 Product S Ref.	1/2" - - £50.00 £51.00 £67.50

All prices are exclusive of VAT

-

£60.00

£43.00


-

22.0


35.0

18/55

18/56

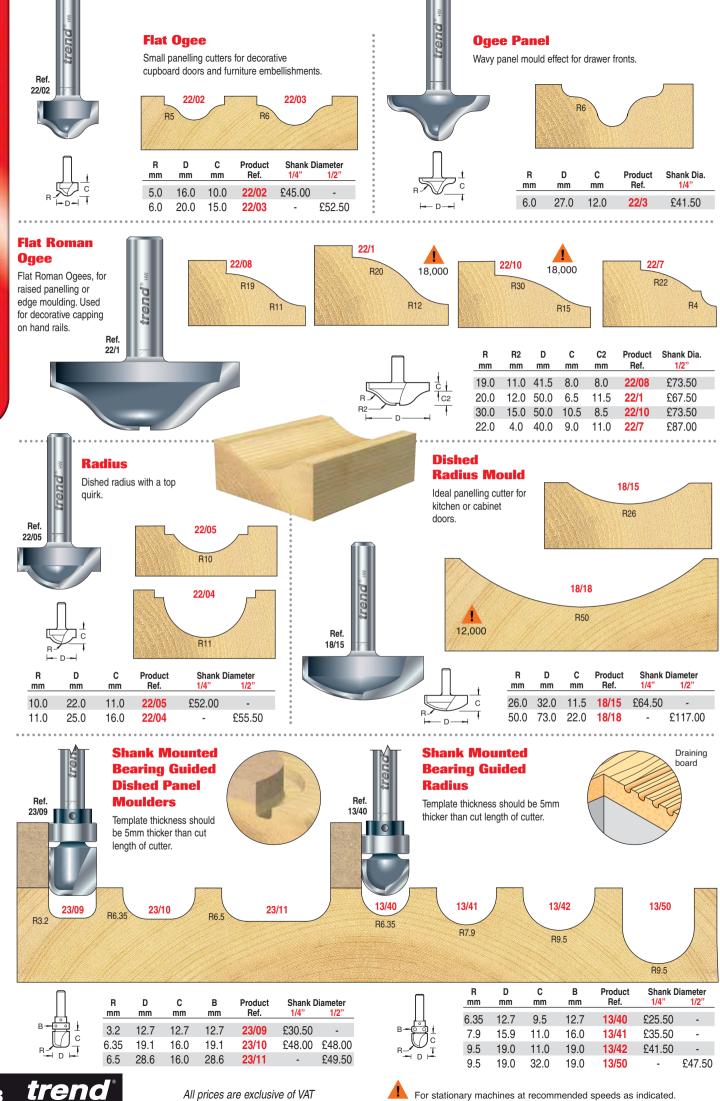


PROFESSIONAL ROUTER CUTTERS

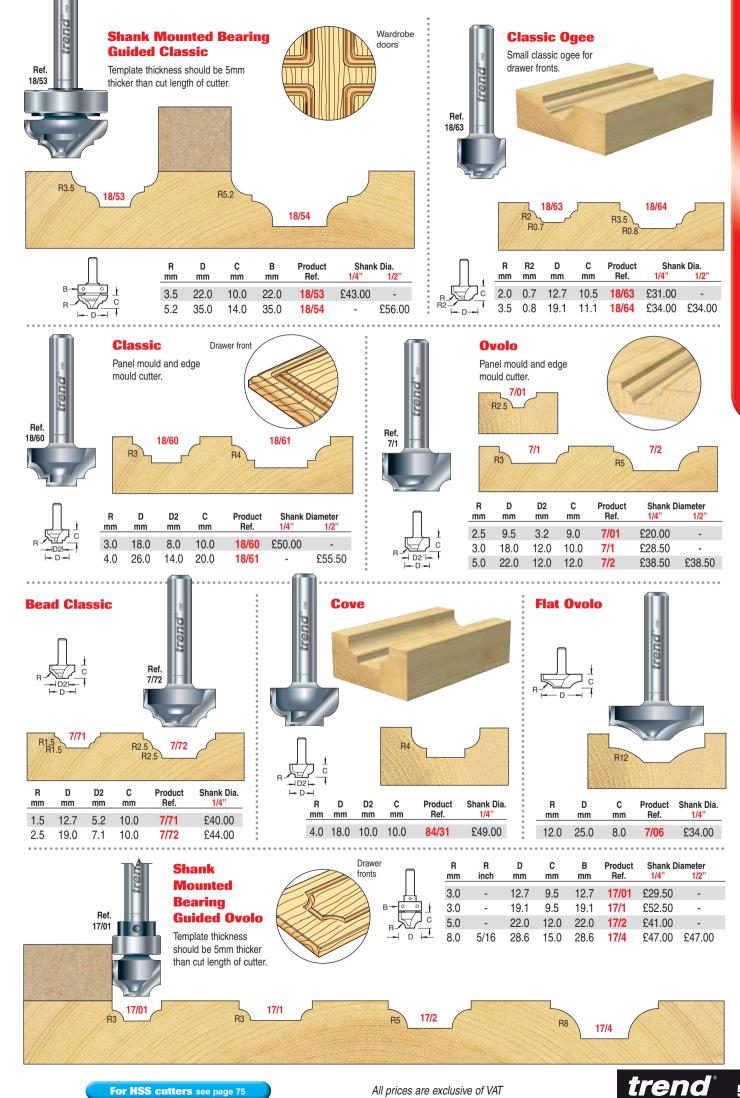

For HSS cutters see page 75



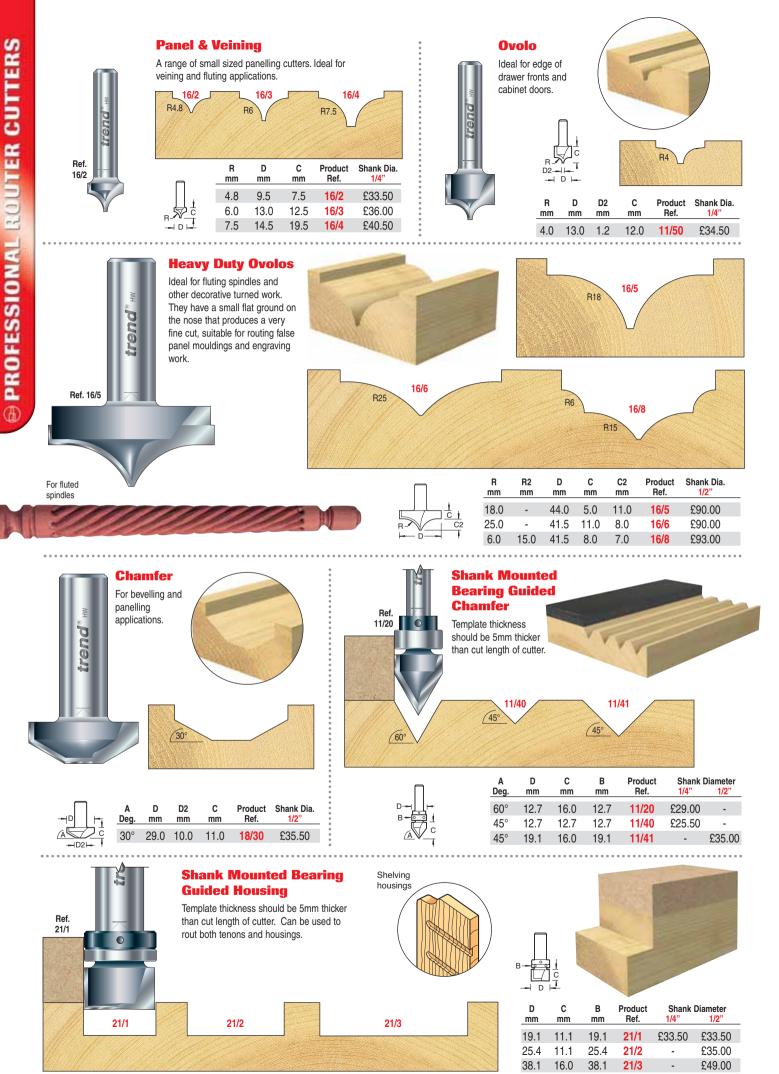



SLOTTING & GROOVING



Profiles showing cross section of biscuit joints. Biscuit dimensions shown below. All sizes **Bearing Guided** shown are nominal. **Biscuit Jointer Set** 8.5mm For biscuit jointing of timber, No. 0 Using bearing B23 1 man-made fibre and particle 47.5mm x 15.5mm x 4mm 4mm board with the router. The set Suitable for 8-12mm board includes three sizes of bearing which set the correct depth of cut 10.5mm for the three sizes of biscuit available Using bearing B19 No. 10 A slightly longer cut than the 1 53mm x 19mm x 4mm length of the biscuit is required, 4mm Suitable for 13 - 18mm board to allow some lateral play for easy alignment during assembly. A water based glue (PVA) is used with the biscuits which will 12.5mm expand as the moisture is absorbed. Boards are simply Using bearing B15 No. 20 clamped together until glue is I 60mm x 23mm x 4mm cured. 4mm Suitable for 19mm + board 1 For larger boards, biscuits can be doubled up by making two passes. D С B B2 **B**3 Product Shank Diameter 1/4 mm mm mm mm mm Ref. 8mm 1/2342 £47.00 £47.00 £47.00 40.0 4.0 15.0 19.0 23.0 Comprises B2 For biscuit B3 1 x Arbor 33/60 £11.50 £11.50 £11.50 1 x 40.0mm x 4.0mm slotter SL/GG £21.50 prices 1 x Bearing 15.0mmØ see page 110 **B15** £8.50 & 148. NST Instructions 1 x Bearing 19.0mmØ **B19** £3.25 supplied 1 x Bearing 23.0mmØ **B23** £8.00 **Bearing Guided** A 6.0mm tongue is obtained 45 using the set Ref. 338. **Matchlining Set** Timber thickness A complete cutter set for Min. 15.0mm producing matchlining. Jointing rend Max. 19.0mm parts are interchanged on the arbor to change the mode of the cutter. 18,000 A 4.0mm tongue is obtained 45 Set Ref. 338 can be converted using the set Ref. 339. to Ref. 339, and vice versa, by **Timber thickness** purchasing the respective Ref. 338 Min. 10.0mm aroover Max. 17.0mm D D2 С C2 в Product Shank Dia. A B2 Deg mm mm mm mm mm mm Ref. 1/2' 45° 47.0 34.0 22.0 338 £116.50 6.0 11.045° 34.0 11.0 6.0 34.0 22.0 339 £116.50 Comprises Ų Matchlining Matchlining 1 x Chamfer profile cutter SP-338A £54.00 D tongue set-up groove set-up E SP-338B £27.00 1 x 34.0mm x 6.0mm kerf groover - D2-1 x 47.0mm x 6.0mm kerf groover SP-338C £33.50 B2 or 1 x 47.0mmØ x 4.0mm kerf groover SP-339A £27.50 1 x Arbor with spacers SP-338D £7.50 Instructions 1 x Bearing 22.0mmØ **BB22** £8.00 <u>SS</u> supplied **BB34** 1 x Bearing 34.0mmØ £10.75

Puend



trend

Bearing Guided Infinitely Variable 'Quad' Groover Set

This versatile 1/2" shank groover set offers grooving widths of 3.2mm, 4.0mm, 4.8mm and 6.3mm. It is also infinitely variable from 6.6mm to 18mm in 0.1mm increments. A jointing facility using the bearing is also possible.

Set comprises of four 2 wing groovers with 7.94mm (5/16") bore and an arbor which may be used singly or together to produce a wide range of groove widths. One ball bearing comes as standard.


18,000

trend

This set can also be used to tongue and groove 9mm to 22mm board. Α






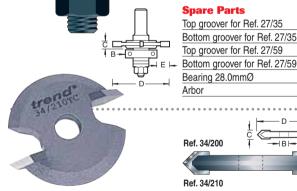

Specialist Groovers

Two wing groovers have 6.35mm (1/4") bore. For use with Ref. 33/60 arbor. Allows decorative cuts in panels and frames to disguise glue lines & for fluting effects.

With arbor Ref. 33/60X1/4, the max. distance from the edge is approx. 25mm. With arbor Ref. 33/60X1/2, the max. distance from the edge is approx. 35mm.



trend

	Description	E mm	C2 mm	D mm	B mm	Product Ref.	Shank Dia. 1/2"
	Quad Groover Set	12.8	3.2 to 18.0	47.6	22.0	QUAD	£86.00
1	Comprises	E mm	C mm	D mm	B mm	Product Ref.	Shank Dia. 1/2"
	Groover A	12.8	3.2	47.6	-	SP-QUAD/18	£20.50
	Groover B	12.8	4.0	47.6	-	SP-QUAD/532	£20.50
	Groover C	12.8	4.8	47.6	-	SP-QUAD/316	£20.50
	Groover D	12.8	6.3	47.6	-	SP-QUAD/14	£20.50
	Standard bearing	12.8	7.0	-	22.0	BB22	£8.00
	Arbor	-	-	-	-	33/30	£7.00
]	Accessories (not in	cluded in	set)				

	E	C mm	D mm	B mm	Product Ref.	Price
Groover	12.8	1.6	47.6	-	SP-QUAD/116	£15.00
Groover	12.8	2.0	47.6	-	SP-QUAD/564	£15.00
Groover	12.8	2.4	47.6	-	SP-QUAD/332	£15.00
Bearing 19.0mmØ	14.3	6.0	-	19.0	BB19	£8.00
Bearing 25.0mmØ	11.3	8.0	-	25.0	BB25	£10.75
Bearing 26.0mmØ	10.8	8.0	-	26.0	BB26	£10.75
Bearing 28.0mmØ	9.8	8.9	-	28.0	BB28	£10.75
Bearing 29.0mmØ	9.2	8.0	-	29.0	BB29	£10.75
Bearing 30.0mmØ	8.8	8.0	-	30.0	BB30	£10.75
Bearing 34.0mmØ	6.8	8.0	-	34.0	BB34	£10.75

Spare

Bearing Guided

To adjust the groove width, these

supplied shims and spacers inserted between the groovers,

giving a 0.1mm increment

Е

mm

11.0

11.0

tools can be re-assembled with the

D

mm

50.0

50.0

В

mm

28.0

28.0

Variable Kerf

Groovers

in thickness.

Top groover for Ref. 27/59

С

mm

3.0 to 5.0

5.0 to 9.0

Replacement arbor nut

Product

Ref.

27/35

27/59

SP-27/35A

SP-27/35B

SP-27/59A

SP-27/59B

BB28

33/30

Shank Dia.

1/2"

£54.00

£58.00

£20.50

£20.50

£20.50

£20.50

£10.75

£7.00

1/4"

Shims & Spacer Sets

Shim Sets

Set of twelve shims for fine adjustment of slotters and groovers on arbors. Each set comprises two shims of each thickness.



Shim Packs

Spare shim packs for adjusting profile scribe sets. Supplied in packs of 10, either 0.05mm or 0.1mm thick.



ANUT/33/30

£1.00

OD

Spacer Set Ref. SPACER/8

A set of thirteen 8mm spacers and shims. Comprises two spacer/shims of each thickness. and one extra 0.05mm shim




0.05mm 0.1mm 0.5mm 1.0mm 3.0mm 6.0mm

Spacer Set Ref. SPACER/12 A set of six 12mm bore spacer



1.0mm 2.0mm 3.0mm 4.0mm 6.3mm 10.0mm


Outside Dia. mm (OD)	Bore Size mm (ID)	Thick mm	Product Ref.	Price
11.5	6.3	-	SHIM/63	£6.00
14.0	8.0	-	SHIM/8	£6.00
18.0	12.0	-	SHIM/12	£6.00
16.0	8.0	0.05	SHIM/PACK/1	£3.75
16.0	8.0	0.1	SHIM/PACK/2	£3.75
16.0	8.0	-	SPACER/8	£6.00
18.0	12.0	-	SPACER/12	£8.50

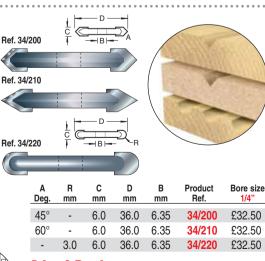

Arbor & Bearings		
Arbor with 1/4", 8mm or 1/2" shank	33/60	£11.50
Bearing 30.0mmØ for 3.0mm depth	B300	£8.00
Bearing 29.0mmØ for 3.5mm depth	B290	£7.50
Bearing 28.0mmØ for 4.0mm depth	B280	£7.50
Bearing 26.0mmØ for 5.0mm depth	B260	£7.50

All prices are exclusive of VAT



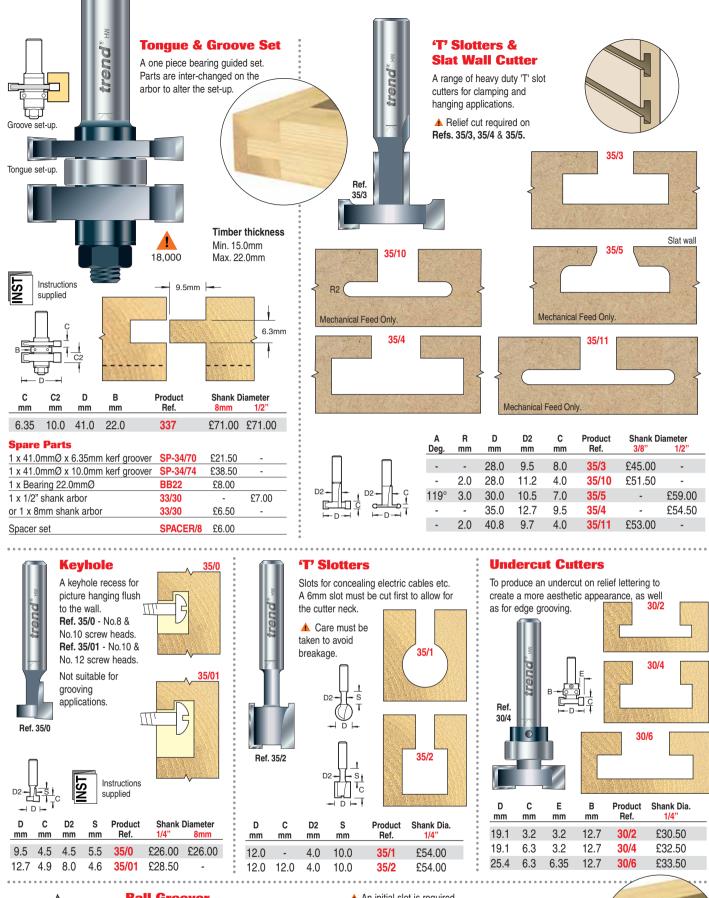





Ball Groover

Ideal for hiding pipes and cables. Part of curve can be used for producing decorative edges

An initial slot is required before using the ball groovers.

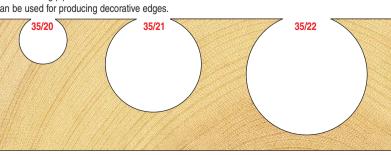



D mm	D2 mm	Product Ref.	Shank Dia. 1/2"
12.7	6.5	35/20	£36.00
25.4	9.0	35/21	£46.00
32.0	12.7	35/22	£55.00

trend

All prices are exclusive of VAT



SLOTTING & GROOVING

Applications for these tools include grooving for biscuit jointing, matchlining, tongue and grooving and cutting slots for weather proofing frames and doors.

Arbors, slotters & bearings to create customised slotting and grooving tools.

All slotters are precision made in TCT grade for long life when cutting the most abrasive materials.

Shank Diameter

£11.50


£11.50

1/2'

£11.50

Standard Duty Arbors Standard duty arbor with 1/4" (6.35mm) spindle and spacers. Enables the mounting of 1/4" bore slotters with and without bearings in a variety of positions. Use shims/spacers to prevent bearings with larger diameters, touching the tips of the slotters and for accurate spacing. (Shim sets are available, please see page 62). NB Ref. 33/60X1/2 = 76mm OL Product Ref. 33/60 £11.50

1/4" STACK SYSTEM

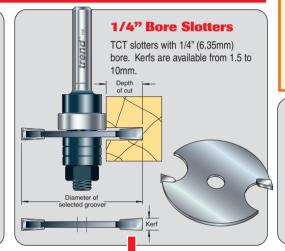

1/4" Bore Bearings

be fitted as near to the shank as

possible to avoid vibration.

fitted the correct way onto the arbor with respect to the direction of

rotation. Bearings and slotters should

Use of a bearing will govern the depth of cut without the need of a side-fence. The smaller the bearing, the deeper the cut. The chart below shows the depths of cut possible with each size of bearing.


Ensure slotters are



			US	E CHA	RT BEI	.OW T	O FINI) DEP	TH OF	CUT		۲	5								1/4" -	-
Kerf	1.5	1.5	2	2	2.5	2.5	2.5	3	3	4	4	4	5	5.5	6	7	8	10	10			
Ref.	SL/A	SL/AA	SL/B	SL/E	SL/C	SL/CC	SL/F	SL/D	SL/DD	SL/G	SL/GG	34/01	SL/K	SL/H	34/20	34/8	34/33	34/6	34/41			
Price	£20.00	£19.00	£20.00	£20.00	£20.00	£19.00	£22.50	£20.00	£19.00	£22.50	£21.50	£51.00	£24.50	£24.50	£28.50	£34.00	£34.00	£30.50	£37.00	L	+	
Dia.	36	40	36	40	36	40	50	36	40	36	40	41.3	40	36	41.3	41.3	41.3	16	41.3	Ref.	Dia.	Price
Teeth	2	2	2	2	2	2	2	2	2	2	2	4	2	2	2	4	2	3	2	Å	ā	<u> </u>
	11.6	13.6	11.6	13.6	11.6	13.6	18.6	11.6	13.6	11.6	13.6	14.3	13.6	11.6	14.3	14.3	14.3	1.65	14.3	B127	12.7	£4.75
		13	11	13	11	13	18	11	13	11	13	13.6	13	11	13.6	13.6	13.6	1	13.6	B14	14	
	10.5	12.5	10.5	12.5	10.5	12.5	17.5	10.5	12.5	10.5	12.5	13.1	12.5	10.5	13.1	13.1	13.1	0.5	13.1	B15	15	£8.50
	10	12	10	12	10	12	17	10	12	10	12	12.6	12	10	12.6	12.6	12.6	-	12.6	B16	16	£3.25
	9.5	11.5	9.5	11.5	9.5	11.5	16.5	9.5	11.5	9.5	11.5	12.1	11.5	9.5	12.1	12.1	12.1	-	12.1	B17	17	£8.50
	9	11	9	11	9	11	16	9	11	9	11	11.6	11	9	11.6	11.6	11.6	-	11.6	B18∘	18	£8.00
	8.5	10.5	8.5	10.5	8.5	10.5	15.5	8.5	10.5	8.5	10.5	11.1	10.5	8.5	11.1	11.1	11.1	-		B19	19	£3.25
	8	10	8	10	8	10	15	8	10	8	10	10.6	10	8	10.6	10.6	10.6	-	10.6	B20∗	20	£8.00
	7.5	9.5	7.5	9.5	7.5	9.5	14.5	7.5	9.5	7.5	9.5	10.1	9.5	7.5	10.1	10.1	10.1	-	10.1	B21	21	£8.00
	_7	9	7	9	7	9	14	7	9	7	9	9.6	9	7	9.6	9.6	9.6	-	9.6	B22	22	£8.00
	6.5	8.5	6.5	8.5	6.5	8.5	13.5	6.5	8.5	6.5	8.5	9.1	8.5	6.5	9.1	9.1	9.1	-	9.1	B23	23	£8.00
	6	8	6	8	6	8	13	6	8	6	8	8.6	8	6	8.6	8.6	8.6	-	8.6	B24	24	£8.00
	5.5	7.5	5.5	7.5	5.5	7.5	12.5	5.5	7.5	5.5	7.5	8.1	7.5	5.5	8.1	8.1	8.1	-	8.1	B25∗	25	£8.00
	5	7	5	7	5	7	12	5	7	5	7	7.6	7	5	7.6	7.6	7.6	-	7.6	B260		£7.50
	4.5	6.5	4.5	6.5	4.5	6.5	11.5	4.5	6.5	4.5	6.5	7.1	6.5	4.5	7.1	7.1	7.1	-	7.1	B270		£7.50
	4	6	4	6	4	6	11	4	6	4	6	6.6	6	4	6.6	6.6	6.6	•	6.6	B280		£7.50
	3.5	5.5	3.5	5.5	3.5	5.5	10.5	3.5	5.5	3.5	5.5	6.1	5.5	3.5	6.1	6.1	6.1	-	6.1	B290		£7.50
	3	5	3	5	3	5	10	3	5	3	5	5.6	5	3	5.6	5.6	5.6	•	5.6	B300	30	£8.00








Example - For 2.5mm kerf and 8.5mm depth of cut, choose a 33/60 arbor, SL/CC slotter and B23 bearing.

12MM STACK SYSTEM



Heavy duty arbor with spacers for 12mm bore slotters with or without bearings.

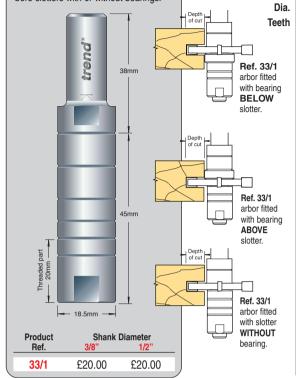


							the arbo	or in comb a bearing.	ination wit		,
2	2.5	4	5	6	6	8	10	10]	-	-
39/6	39/9	34/1	34/04	34/22	34/2	34/3	34/4	34/40			
£63.50	£63.00	£45.50	£45.00	£47.50	£47.50	£52.00	£45.00	£54.00			
86	100	50	50	40	50	50	40	50	÷:	* 50	Price
12	12	4	4	3	4	4	3	4	Ref.	Dia.	
32.5	39.5	14.5	14.5	9.5	14.5	14.5	9.5	14.5	B210	21	£6.50
30.5	37.5	12.5	12.5	7.5	12.5	12.5	7.5	12.5	B250	25	£10.75
30	37	12	12	7	12	12	7	12	B26	26	£6.50
29.5	36.5	11.5	11.5	6.5	11.5	11.5	6.5	11.5	B27∻	27	£10.75
29	36	11	11	6	11	11	6	11	B28	28	£8.50
28.5	35.5	10.5	10.5	5.5	10.5	10.5	5.5	10.5	B29	29	£10.75
28	35	10	10	5	10	10	5	10	B30	30	£8.50
27.5	34.5	9.5	9.5	4.5	9.5	9.5	4.5	9.5	B31∗	31	£10.75
27	34	9	9	4	9	9	4	9	B32	32	£8.00
26.5	33.5	8.5	8.5	3.5	8.5	8.5	3.5	8.5	B33	33	£10.75
26	33	8	8	3	8	8	3	8	B34	34	£8.00
25.5	32.5	7.5	7.5	2.5	7.5	7.5	2.5	7.5	B35∻	35	£8.00
25	32	7	7	2	7	7	2	7	B36∻	36	£8.00
24.5	31.5	6.5	6.5	1.5	6.5	6.5	1.5	6.5	B37	37	£4.75
24	31	6	6	1	6	6	1	6	B38	38	£8.00
23.5	30.5	5.5	5.5	0.5	5.5	5.5	0.5	5.5	B39∗	39	£10.00
23	30	5	5		5	5	-	5	B40	40	£8.00
22.5	29.5	4.5	4.5	-	4.5	4.5	-	4.5	B41	41	£11.50
22	29	4	4	-	4	4	-	4	B42	42	£9.00
21.5	28.5	3.5	3.5	-	3.5	3.5	-	3.5	B43∗	43	£9.00

PROFESSIONAL ROUTER CUTTERS

M12 THREADED SYSTEM

Heavy Duty Arbors For M12 Bore Slotters

Slotters with M12x1.0mm threaded bore enables flush recessing in the corner such as for weather proofing. Spacers are supplied to ensure the minimal threaded arbor protrudes below the slotter. Arbor 33/20 enables 12mm bore guide bearings to be fitted above slotter for self-guiding work.

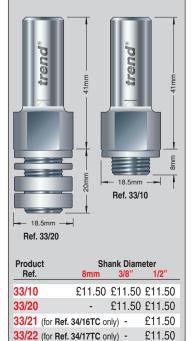

These slotters have a M12 threaded boss to enable them to be threaded onto the arbor without the need for a securing nut.

-l Ker

Kerf

Ref.

Price

<u> </u>

Ref. 33/10 guided by side fence or batten guide.

12mm

These slotters have a 12mm clear bore to

enable them to be mounted at any position on

														-		
Kerf	2	2.5	3	4	5	6	7	8	9.5	10	11	15	20			
Ref.	34/03	34/9	34/10	34/11	34/110	34/12	34/7	34/13	34/5	34/15	34/14	34/16*	34/17*			
Price	£49.50	£50.00	£50.00	£49.50	£51.00	£51.00	£55.50	£52.50	£62.50	£54.00	£57.00	£54.00	£54.00		—	
Dia.	50	50	50	50	50	50	50	50	50	40	50	40	40	Ref.	Dia.	C C C
Teeth	_4	4	4	4	4	4	4	4	4	2	4	2	2	å	Dia	Ξ_
	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	9.5	14.5	9.5	1.1	B210	21 £6.	50
	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	7.5	12.5	7.5		B250	25 £10.	75
	12	12	12	12	12	12	12	12	12	7	12	7	7	B26	26 £6.	50
	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	6.5	11.5	6.5		B27∗	27 £10.	75
	11	11	11	-11	11	11	11	11	11	6	11	6	6	B28	28 £8.	50
	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	5.5	10.5	5.5	-	B29	29 £10.	75
	10	10	10	10	10	10	10	10	10	5	10	5	5	B30	30 £8.	50
	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	4.5	9.5	4.5	-	B31∗	31 £10.	75
	9	9	9	9	9	9	9	9	9	4	9	4	-	B32	32 £8.	00
	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	3.5	8.5	3.5		B33	33 £10.	75
	8	8	8	8	8	8	8	8	8	3	8	3	3	B34	34 £8.	00
	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	2.5	7.5	2.5	-	B35∗	35 £8.	00
	7	7	7	7	7	7	7	7	7	2	7	2	2	B36∻	36 £8.	00
	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	1.5	6.5	1.5		B37	37 £4.	75
	6	6	6	6	6	6	6	6	6	1	6	1	-	B38	38 £8.	00
	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	0.5	5.5	0.5	-	B39∗	39 £10.	00
		5	5	5	5	5	5	5	5	-	5	-	-	B40	40 £8.	00
		4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	-	4.5	-	-	B41		_
		4	4	4	4	4	4	4	4	-	4	-	-			_
		3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	-	3.5	-	-			_
	7 6.5	7 6.5 6 5.5 5 4.5	7 6.5 6 5.5 5 4.5 4.5 4	7 6.5 6 5.5 5 4.5 4.5 4	7 6.5 6 5.5 5 4.5 4.5 4	7 6.5 6 5.5 5 4.5 4	7 6.5 6 5.5 5 4.5	7 6.5 6 5.5 5 4.5	7 6.5 6 5.5 5 4.5 4	2 1.5 1 0.5 -	7 6.5 6 5.5 5 4.5 4.5 4	2 1.5 1 0.5 -	2 - - -	B36∻ B37 B38 B39∻ B40	36 £8.0 37 £4.1 38 £8.0 39 £10.0 40 £8.0 41 £11.0 42 £9.0	0 7 0 0 5 0

These are sleeved bearings and are supplied with a small step washer.
 These groovers must be used with different arbors - see left.

Above Bearings for use with 33/20 Arbor.


trend

WEATHERSEAL Recessing & Seals

trend

O



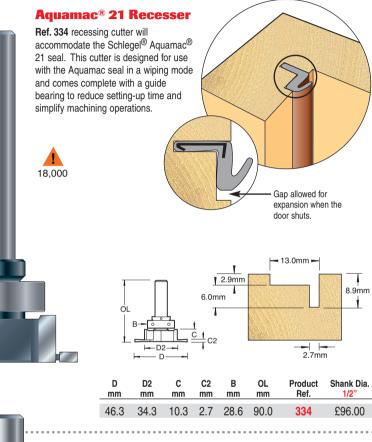


Aquamac[®] 21 Strip

Aquamac[®] 21 strip is fitted into the frame rebate (head and jambs) as three cut pieces forming a compression or wiping seal. The seal is butt joined at the corners. To seal the door bottom, Schlegel[®] weather bar is mounted into the threshold section. It is important that the seal does not abut the weather bar but runs to the threshold section in front (weatherside) of it, to maximise water permeability resistance.



ŧ.

9.6mm

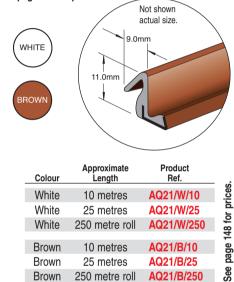

Aquamac[®] 63 Recesser

Trend Aquamac[®] 63 Recessing Sets Ref. 330 and 331 are designed to accommodate the popular Schlegel® Aquamac[®] 63 weather strip system and allows for a particularly small gap between sash and frame. The slot can be positioned part way down the side of the rebate, or at the bottom of the rebate. Ref. 330 must be used with a side fence, whereas Ref. 331 comes complete with a guide bearing to reduce setting-up time.

For perfect snipping and mitre cuts of weatherseal, mouldings and beading.

rend

Ref. 331





trend

7.5mm 3.1mm 6.5mm OI B C.2 2.7mm D D2 С C2 в OL Product Shank Dia. mm mm mm mm mm mm Ref. 1/2£79.50 36.0 25.0 4.8 2.7 58.0 330 41.3 28.3 4.8 2.7 22.0 67.0 331 £92.50


Aquamac[®] 63 Strip

Aquamac[®] 63 strip is fitted into the frame aperture using four cut lengths. It is important to create tight butt or notched joints to ensure high levels of window performance. Joints can be enhanced by the application of a small amount of silicone mastic. When fitted, it is necessary to notch the seal end.



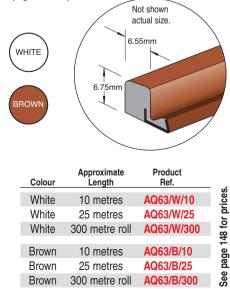

All prices are exclusive of VAT

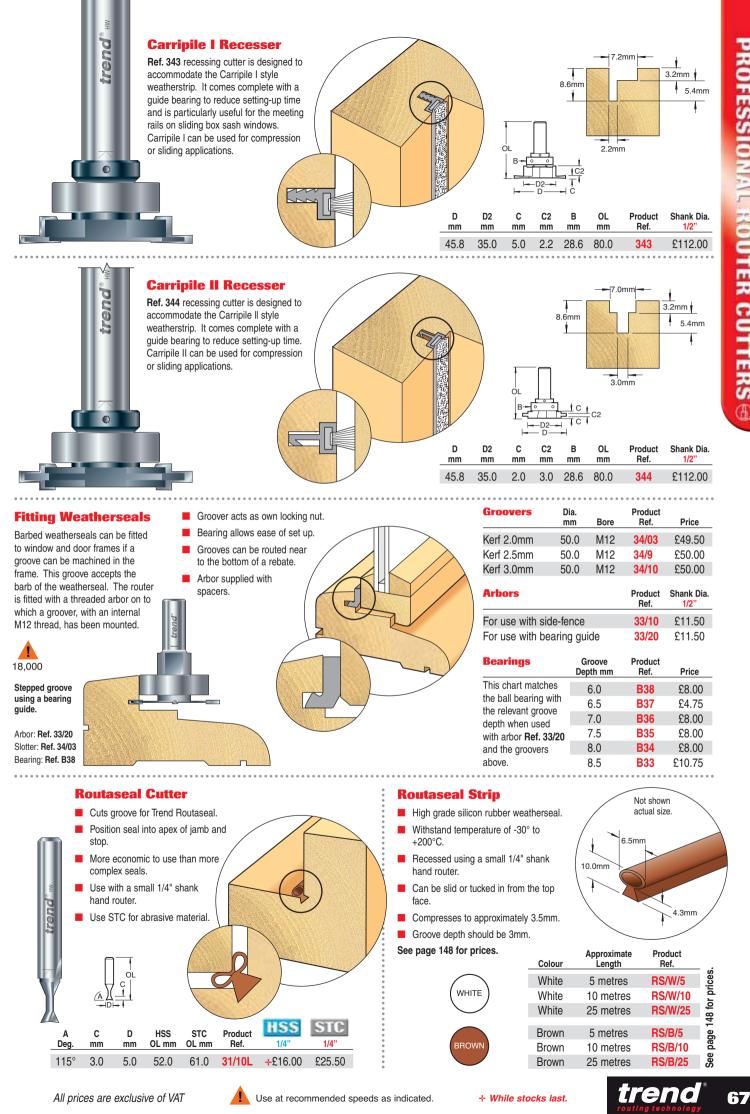

INTUMESCENT & Smokeseal Recessing

Intumescent Recesser

- For either frame or door applications, with standard or Smokeseal® Intumescent Strip.
- Neatly cuts grooves on doors or frames to accept Intumescent Strip which enables the formation of effective barriers to both fire and smoke

ГÌ

D

- Three types available. They are designed for use with seals of 10mm, 15mm or 20mm width and 4mm thickness.
- By using alternative ball bearing diameters, other seal thicknesses can be accommodated.

Cutter Set Ref. 346 is used for the grooving of door edges to receive 10mm intumescent strip. The arbor can be lowered or raised to give a wider groove for 20mm strip. Alternatively Ref. 348 can be used for 15mm strip and Ref. 345 can be used for 20mm strip. Choose the alternative bearings shown above to suit other thicknesses of intumescent strip.

Intumescent Recessing Cutter Sets (complete for / 0mm thick strin)

	(complete	5 101 4.011		suip)			
-	D mm	C mm	B mm	E mm	L mm	Product Ref.	Shank Dia. 1/2"
	40.0	10.0	32.0	4.0	41.0	346	£72.00
ł	40.0	15.0	32.0	4.0	41.0	348	£72.00
	40.0	20.0	32.0	4.0	41.0	345	£72.00
T							

UNGSTEN CARBID TIPPED


Replacement Parts

_	Ref.	Price
Arbor for Ref. 346	33/20	£11.50
Arbor for Ref. 348	33/21	£11.50
Arbor for Ref. 345	33/22	£11.50
Bearing 32.0mmØ	B32	£8.00
Slotter 40.0mm x 10.0mm kerf	34/15	£54.00
Slotter 40.0mm x 15.0mm kerf	34/16	£54.00
Slotter 40.0mm x 20.0mm kerf	34/17	£54.00


Product

Alternative Bearings (for other strip thicknesses)

Bearing mmØ	Strip Thickness mm	Product Ref.	Price
26.0	7.0	B26	£6.50
28.0	6.0	B28	£8.50
30.0	5.0	B 30	£8.50
34.0	3.0	B 34	£8.00
36.0	2.0	B36	£8.00

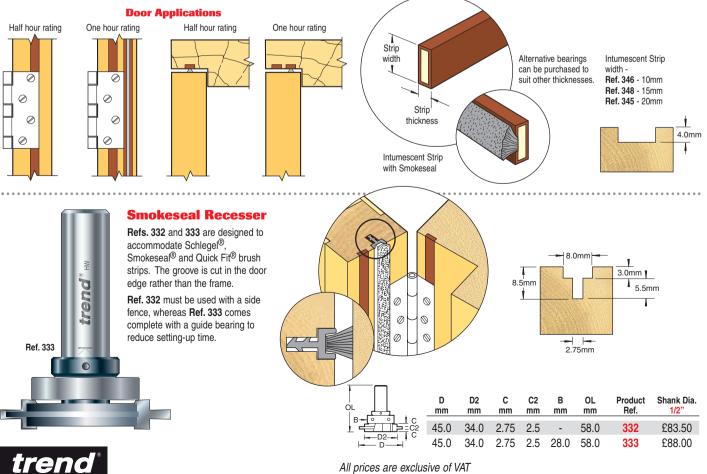

68



supplied

Ref. 346

trend


PROFESSIONAL ROUTER CUTTERS

UNGSTEN CARBIDE TIPPED

trend


69

CUTTERS for **CORIAN**[®] & other Solid Surfaces

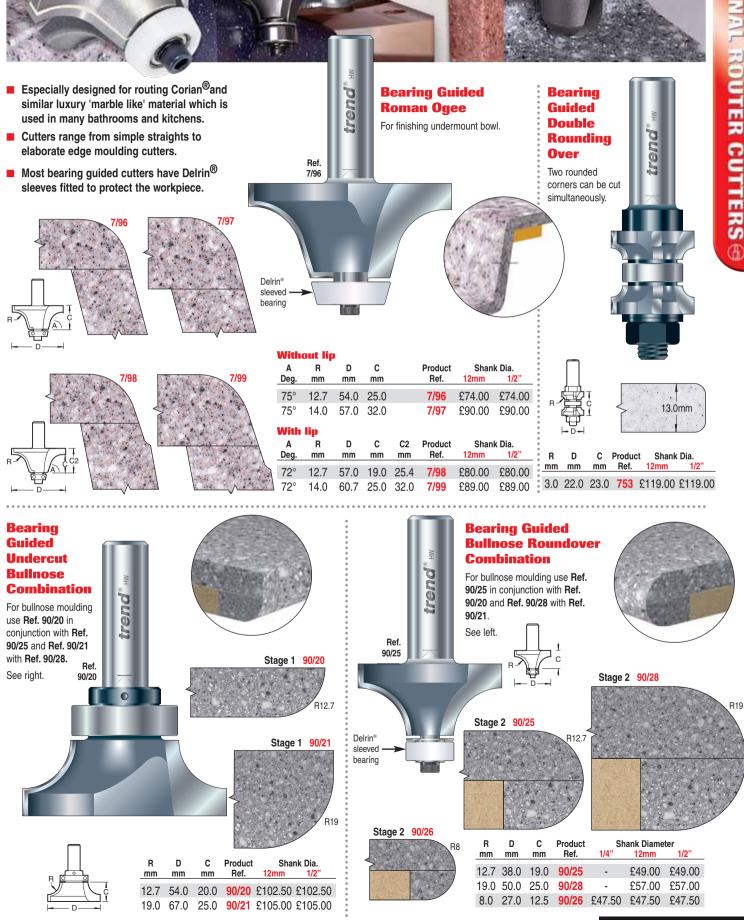

trend

70

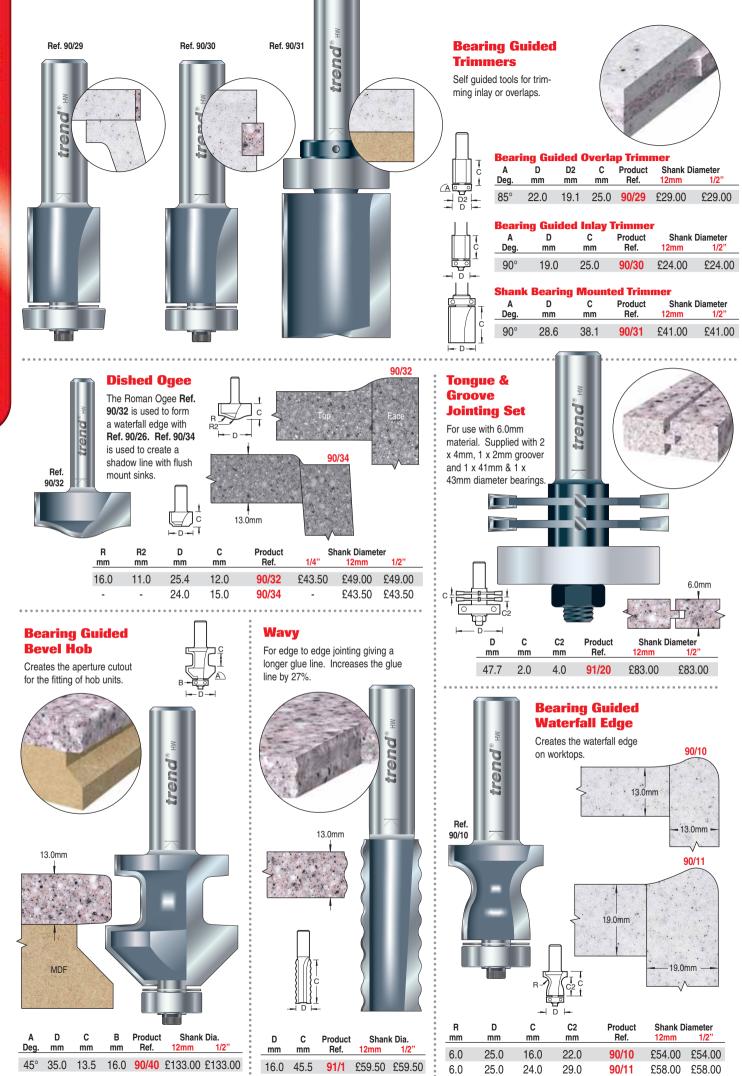

All prices are exclusive of VAT



. milling.

떠

R

mm

3.0

3.0

Ref.

34/91

D

mm

22.2

22.2

Г

RILLING With Portable & Stationary Routers

Router Dowel Drills


- Lip and Spur Short Series. These slow spiral TCT drills can be used in drilling machines or portable routers.
- Refs. 61/01, 61/06 and 61/08 are suitable for use in the DeWalt DE6252 Dovetail Jig.
- For drilling machines or routers.



D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
3/16	4.8	27.0	57.0	61/80	£15.50
7/32	5.5	27.0	57.0	61/10	£14.00
1/4	6.3	27.0	57.0	61/12	£14.00
-	5.0	35.0	57.0	61/05	£17.50
-	6.0	35.0	70.0	61/06	£17.50
-	8.0	35.0	70.0	61/08	£17.50
-	10.0	35.0	70.0	61/01	£17.50


Dowels


- Multi-grooved pine dowel pins.
- Suitable for jointing chipboard and MDF panels in the production of cabinet carcasses and doors.
- Three diameters available.
- The grooves in the dowels allow for easy easier gluing up.
- See page 148 for prices.



6.0 30.0 50 DWL/1/50 6.0 30.0 500 DWL/1/500	
6.0 30.0 500 DWI /1/500	
8.0 30.0 50 DWL/2/50	ices.
8.0 30.0 500 DWL/2/500	for prices.
8.0 40.0 50 DWL/3/50	
8.0 40.0 500 DWL/3/500	See page 148
10.0 35.0 50 DWL/4/50	e pa
10.0 35.0 500 DWL/4/500	Se
10.0 50.0 50 DWL/5/50	
10.0 50.0 500 DWL/5/500	

Plug Makers

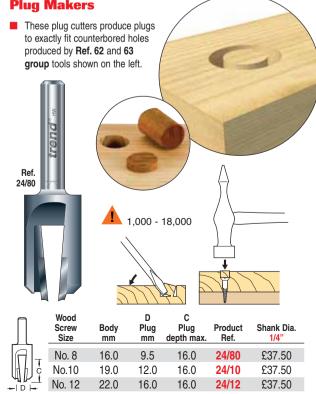



Ref.


62/80



Counter	sink	/Cou	nterb	ore
• • • • • • • • •			• • • • • • •	
	-	10.0	35.0	70.0
Ď	-	8.0	35.0	70.0

Drill C For abrasive materials,

- Tools will drill, countersink and finally counterbore a parallel hole.
- Designed to receive plug produced by plug maker Ref. 24 group shown on the right.
- The drill diameter sizes are for a clearance hole only.
 - 8,000 20,000





The drill size is for a clearance hole only.

-							
	Wood Screw Size	D C/B mm	D2 Drill inch	D2 Drill mm	C mm	Product Ref.	Shank Dia. 1/4"
ŢŢ	No. 8	9.5	3/16	4.8	20.0	63/80	£42.00
₽_ĭ	No. 10	12.0	7/32	5.5	20.0	63/10	£42.00
⊨D2 D ⊨	No. 12	16.0	1/4	6.3	20.0	63/12	£42.00

8,000 - 20,000


trend

	Screw	sizes:
1	No.8	= 4.0mmØ
M o	No.10	= 5.0mmØ
Ţ	No.12	= 5.5mmØ

63 group	•
	•
roduct Shank Dia	•

62 group

JUUL

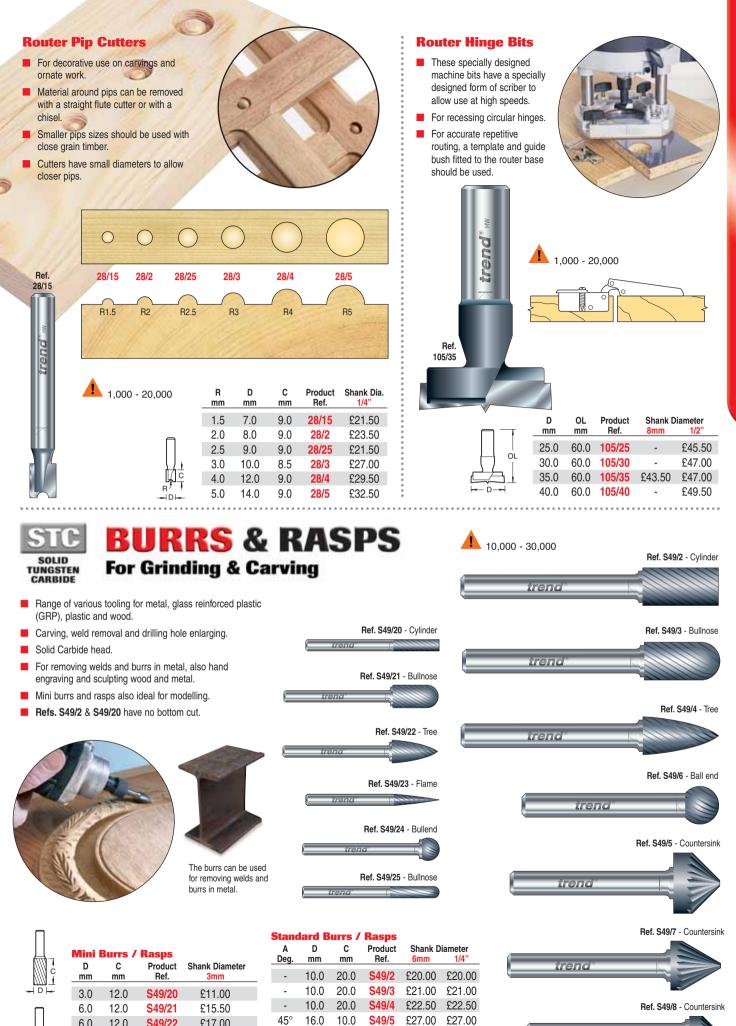



trend

Use at recommended speeds as indicated.

£17.00

£9.50

£16.00

£11.00

6.0

3.0

6.0

3.0

Á

_

D

12.0

12.0

6.0

13.0

S49/22

S49/23

S49/24

S49/25

16.0

10.0

13.0

10.0

-

60°

45°

10.0

10.0

11.0

5.0

S49/5

S49/6

S49/7

S49/8

£27.00

£19.50

£27.50

£20.50

£27.00

£19.50

£27.50

£20.50

73

PROFESSIONAL ROUTER CUTTERS

PROFESSIONAL ROUTER CUTTERS ^(a)

CUTTER TYPES


HSS High Speed Steel Cutters

These are made from a single piece of High Speed Steel, ground with a very fine edge. They are only suitable for non-abrasive materials, but will give a superior finish in soft timbers. Generally HSS cutters are slightly less expensive than their TC grades, but can be more suitable for certain applications. Applications: Routing non-abrasive natural timbers and plastics.

ISSE Super High Speed Steel Cutters

This is a specially developed grade of High Speed Steel, precision

ground to the highest tolerances. HSSE grade cutters are used for specialised applications, typically in the window industry for machining aluminium and uPVC extrusions.

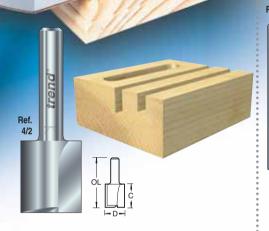


Two Flute Straight

HSS

STEEL

These HSS cutters are suitable for general grooving and rebating.

D inch	D mm	C mm	OL mm	Produ Ref.	uct 1/4"	Shank Di 8mm	ameter 3/8"	1/2"
-	4	11	41	3/01	-	+£13.00	-	-
13/64	5	16	49	3/1	£10.00	+£9.50	-	-
15/64	6	16	47	3/2	£10.00	+£9.50	-	-
1/4	6.3	16	48	3/20	£9.50	-	-	
1/4	6.3	28	59	3/21	£11.00	-	+£11.00	-
5/16	8	19	50	3/4	£11.50	+£13.50	-	-
23/64	9	19	45	3/5	£11.50	-	+£11.00	-
3/8	9.5	25	52	3/50	+£11.5	D - C	+£11.00	-
25/64	10	16	51	3/6	£11.50	+£11.00	-	
25/64	10	35	77	3/60	-	-	£20.00	-
7/16	11	25	56	3/7	+£10.0	- C	-	
15/32	12	19	50	3/8	-	+£11.00	-	-
1/2	12.7	19	45	3/80	+£10.0	- C	-	
1/2	12.7	32	71	3/81	-	-	-	£20.50
33/64	13	20	46	3/9	+£12.5	- C	-	
5/8	15.9	28	54	4/20	-	-	+£19.00	£21.00
5/8	16	19	50	4/2	+£13.5	- C	-	
43/64	17	25	52	4/25	+£20.5) - C	-	-
23/32	18.2	21	48	4/ 4	+£20.0	- C	-	
3/4	19.1	25	57	4/5	£21.00	-	+£16.00	-
25/32	20	25	68	4/6	-	-	+£11.00	-
7/8	22.2	19	53	4/07	+£24.5) - C	-	-
7/8	22.2	31	64	4/7	-	-	+£10.00	-
1	25.4	19	46	4/08	+£27.5	0 - 0	-	-
1	25.4	25	57	4/8	-	-	+£35.50	-



Single Flute Straight

For fast free cutting, these HSS cutters have extra clearance.

D inch	D mm	C mm	OL mm	Product Ref.	Shank 1/4"	Diameter 8mm
1/16	1.6	5	49	2/1	£7.50	-
5/64	2	5	51	2/10	£9.00	+£11.50
-	3	11	44	2/15	-	+£13.00
1/8	3.2	8	40	2/2	£7.50	-
1/8	3.2	11	55	2/20	+ £7.00	-
5/32	4	11	53	2/3	£7.50	-
3/16	4.8	19	61	2/40	£8.00	-
7/32	5.5	19	51	2/5	£8.00	-
1/4	6.3	19	63	2/6	£7.50	-

Pocket


Single and two flute cutters with extra long shanks.

Single Flute D D С C2 0L Product Shank Dia. inch mm mm mm mm Ref. 1/4' 1/8 3.2 8 55 2/2L +£7.00 1/8 3.2 13 56 2/20L £8.00 3/16 4.8 11 53 2/4L +£7.00 3/16 4.8 19 60 2/40L £8.00

Two Flute

						Shank E 1/4"	
1/4	6.3	19	19	70	3/20L	£14.00	-
3/8	9.5	32	19	79	3/55L	-	+£21.50



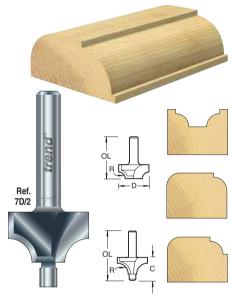

Ovolo

Ovolo & Rounding Over for panel grooving and simple round overs. Pin Guided Round Over guide pins follow intricate shapes easily. Pin Guided Ovolos give a slight quirk. Pin dia. = 4.5mm.

Ovolo & Rounding Over +									
R mm	D mm	OL mm	Product Ref.	Shank Diameter 1/4"					
5.0	16.0	36.0	7/2	£24.00					
8.0	23.0	40.0	7/4	£28.00					
10.0	25.0	45.0	7/5	£36.00					
15.0	40.0	47.0	7/7	£51.50					

Pin Guided Round Over +

R mm	C mm	OL mm	Product Ref.	Shank 1/4"	Diameter 8mm
4.8	11.8	47.0	7E/1	£28.50	-
6.3	12.6	44.0	7E/2	£28.50	£28.50
8.0	14.3	48.0	7E/3	£29.00	-
9.5	15.8	51.0	7E/4	£27.50	-

Pin Guided Ovolo +


R	С	OL	Product		ank Diamet	er
mm	mm	mm	Ref.	1/4"	8mm	3/8"
3.2	10.2	43.0	7D/1	£25.50	-	-
6.3	13.3	45.0	7D/2	-	£25.50	-
9.5	16.5	52.0	7D/3	£31.50	£31.50	£21.50

+ Available while stocks last.




Chamfer


Chamfer 'V' Groove for veining, panelling, 'V' grooving, bevelling & chamfering. Pin Guided Chamfer/Bevel ideal for fast chamfering. Pin dia. = 4.5mm.

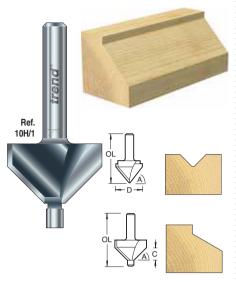



Chan	Chamfer 'V' Groove +								
A D OL Product Shank Diameter									
Deg.	mm	mm	Ref.	1/4"	1/2"				
45°	15.0	46.0	11/3	£20.00	-				
45°	32.0	66.0	10/10	-	£47.50				

Pin (Guide	d Chan	nfer/Bev	el +
A Deg.	C mm	OL mm	Product Ref.	Shank Diameter 8mm
45°	10.0	52.0	10H/1	£30.00

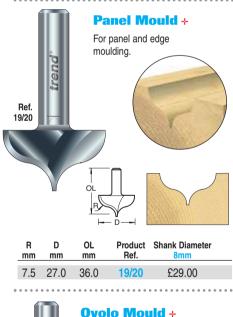

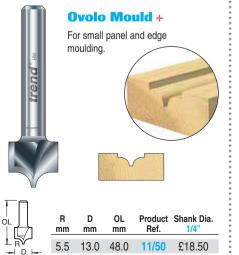

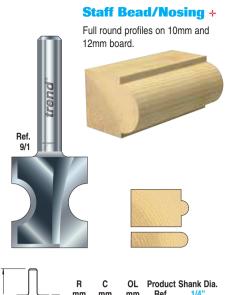




Ogee Mould +

For varied panel and edge moulding.







Dovetail + To produce tight


reliable joints. **Ref. 31/02** is for use with DeWalt DE6251 dovetail jig.



	A Deg.	D mm	OL mm	Product Ref.	Shank Dia. 1/4"
	100°	10.0	37.0	31/1	£14.00
]	103°	11.8	36.0	31/2	£14.00
Ļ	100°	14.0	38.0	31/3	£16.50
Δ	100°	16.0	40.0	31/5	£19.00
)	103°	13.2	54.0	31/02	£15.00

Radius & Cove

Single Flute Radius and Two Flute Radius for coves and part of a rule joint. Pin Guided Cove permits freehand edging at high speeds. Pin Dia. = 4.5mm.

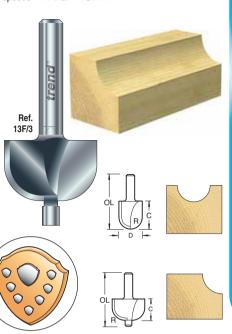

Sing	le Flu	te Ra	dius 4	÷		
R mm	D mm	OL mm	Produ Ref.		hank Dian	neter <mark>8mm</mark>
3.0	6.0	49.0) 12/3	3 -	£	16.50
6.3	12.7	45.0) 12/6	£18	.00 £	18.50
Two	Flute	Radi	us +			
R mm	D mm	OL mm	Product Ref.	Sha 1/4"	ank Diame 8mm	eter 3/8"
8.0	16.0	43.0	13/1	£27.00	£27.00) -
9.0	18.0	45.0	13/2	£27.50	-	-
10.0	20.0	44.0	13/3	£28.50	-	-
127	25.4	43.0	13/30		-	£21.50


Pin Guided Cove +

•	R mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"	
•	4.8	12.8	42.0	13F/1	£24.00	
•	6.3	14.4	44.0	13F/2	£24.50	
•	9.5	16.0	48.0	13F/3	£26.00	
•	9.5	10.0	40.0	136/3	120.00	

Pin Guided Rebater +

Guide pin follows the work edge to give a preset width of rebate. Pin dia. = 4.5mm.

Ref. 8D/2



E mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
6.35	14.0	46.0	8D/1	£27.00
9.5	14.0	46.0	8D/2	£30.50
12.7	14.0	46.0	8D/3	£38.00

trend



PROFESSIONAL ROUTER CUTTERS

DOW INDUSTRY TOOLING

Cutters are designed to plunge and machine or mill lateral slots. Other tools are designed to drill, mill, and countersink slots in both plastic and

All aluminium tooling should be used with a coolant, wax stick or lubricant.

Straight Two Flute

Material should be securely clamped.

Plunge Slotting/Routing

Single Flute Helical for drilling and slotting, cutting aluminium anodised duralium and uPVC plastic. Ideal for recessing and slotting extrusions. HSSE is a special grade for machining the most abrasive anodised finishes.

> Ref. 50/08 10,000 - 12,000

Plunge slotting on a CNC machine HSSE

STEEL

NOSTEN

ARBIDE

TIPPED


SUPER HIGH SPEED STEEL

SOLID

CARBIDE

For grooving and profiling of aluminium and plastics. 1,000 - 10,000 Ref. 55/1

	HSS								
D mm	C mm								
6.3	12.7	65.0	55/1	£14.00	£14.00	-			
9.5	12.7	65.0	55/2	-	£14.00	£14.00			
12.7	12.7	65.0	55/3	-	£15.50	£16.00			

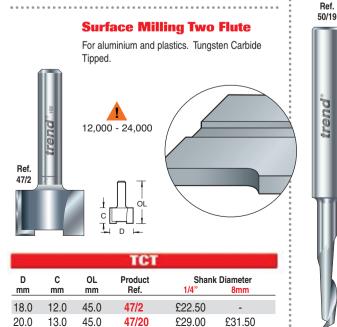

Single Flute Helical с OL D Product Shank Diameter mm mm mm Ref. 1/4' 8mm 10mm 3.0 12.0 60.0 50/03 £17.00 £15.00 4.0 12.0 60.0 50/04 £19.00 £15.50 5.0 12.0 60.0 50/05 £17.00 £14.00 5.0 14.0 120.0 50/50 £22.50 5.0 18.0 60.0 50/25 £16.00 5.0 35.0 80.0 50/26 £32.50 -5.0 40.0 100.0 50/27 _ £35.50 6.0 14.0 60.0 50/06 £19.00 £15.50 7.0 50/07 14.0 60.0 -£17.00 8.0 14.0 80.0 50/08 £17.00 £14.00 8.0 14.0 120.0 50/51 £22.50 --9.0 14.0 80.0 50/09 £19.00 _ -10.0 14.0 80.0 50/10 £23.00 £19.00 -10.0 14.0 120.0 50/14 £26.00 --12.0 14.0 80.0 50/12 £23.00 -12.0 14.0 70.0 50/13 £26.50 -

Refs. 50/15 to 50/23 & 50/52 have narrow necks for deep entry into second web of extrusions. Refs. 50/27, 50/30 & 50/31 have a single flute helical with normal necks, but long shanks for water slot.

10,000 - 12,000



					HOOL			
	Single	Flute	Helica	al with	Narrow	Neck		
- -	D mm	C mm	C2 mm	OL mm	Product Ref.	Sh 1/4"	ank Diamet 8mm	ter 10mm
t	4.0	16.0	45.0	90.0	50/15	-	£24.00	-
	5.0	16.0	35.0	80.0	50/19	£23.00	£21.50	-
ОL	5.0	16.0	45.0	90.0	50/17	-	£24.00	-
	6.0	14.0	34.0	80.0	50/52	-	£21.50	-
	8.0	14.0	54.0	80.0	50/18	-	£22.50	-
1	8.0	14.0	68.0	100.0	50/20	-	£36.00	-
	10.0	14.0	65.0	85.0	50/21	-	-	£33.00
г	10.0	14.0	75.0	96.0	50/22	-	-	£36.00
	10.0	14.0	95.0	120.0	50/23	-	-	£36.00
	Single	Fluto	Holics	al with	Long St	ank - I	Nator S	lot

	Single F	lute Helic	al with Lo	ng Shank - W	later Slot
	D mm	C mm	OL mm	Product Ref.	Shank Diameter 8mm
1	4.0	40.0	100.0	50/30	£30.50
11	5.0	40.0	100.0	50/27	£35.50
r⊥ ⊃⊢	6.0	40.0	100.0	50/31	£29.50



trend

C2

C

non-ferrous metal.

trend

Water Slot Cutters for uPVC Plastic

For drilling and slotting uPVC plastic. The long shanks are ideal for water slot routing. Refs. 50/34 - 50/40 are single flute straight cutters and Ref. 50/32 is a two flute helical long shank cutter.





		HS	SE	
Single F	lute Strai	ght for Pla	stic	
D mm	C mm	OL mm	Product Ref.	Shank Diameter 8mm
4.0	25.0	100.0	50/34	£31.00
5.0	35.0	80.0	50/35	£33.00
5.0	30.0	100.0	50/36	£33.00
5.0	45.0	100.0	50/37	£33.00
5.0	55.0	100.0	50/38	+£33.00
6.0	48.0	90.0	50/39	£33.00
6.0	30.0	100.0	50/40	£31.00

Two Flut	te Helical	for Plastic		
D mm	C mm	OL mm	Product Ref.	Shank Diameter 8mm
5.0	40.0	100.0	50/32	£31.00

Two Flute Helical for Nonferrous Metal

Two flute helical cutters suitable for non-ferous metals with long shank, fine finish & up-cut. STC offer longer life.




			HSS	12		
D mm	C mm	OL mm	Product Ref.	s 1/4"	Shank Diamete 8mm	er 3/8"
5.0	40.0	100.0	50/33	-	£31.50	-
8.0	19.0	80.0	55/08	£28.50	£27.00	-
			ST	C		
D mm	C	OL mm	Product Ref.	S 1/4"	hank Diamete 8mm	r 3/8"

mm	mm	mm	Ref.	1/4"	8mm	3/8"
6.3	20.0	63.0	S55/10	£33.00	-	-
8.0	20.0	63.0	S55/08	-	£42.50	-
9.5	25.0	63.0	S55/11	-	-	£44.50

Three Flute 90° Countersink


Ref. 55/08

This countersink can be used at high speeds for countersinking alloy.

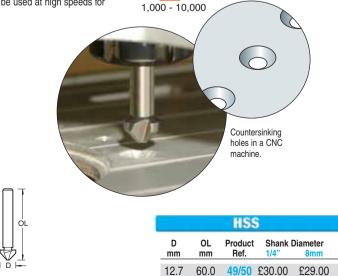

Surface Milling/Routing -Threaded Shank

Straight Rotox® cutters with M10x1.5mm internal thread, for uPVC plastics and aluminium.

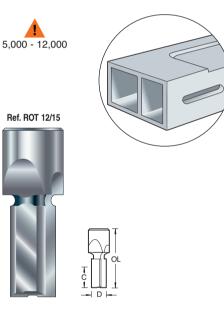

HSS							
Single	Flute						
D mm	C mm	OL mm	Product Ref.	Shank Dia. M10			
4.0	12.0	52.0	ROT 4/12	£45.00			
4.0	23.0	52.0	ROT 4/23	+£54.00			
5.0	23.0	52.0	ROT 5/23	£48.00			
6.0	22.0	52.0	ROT 6/22	£52.00			
Two Flu	ite						
D	•		— • •				
mm	C mm	OL mm	Product Ref.	Shank Dia. M10			
-	•			•			
mm	mm	mm	Ref.	M10			
mm 8.0	mm 26.0	47.0	Ref. ROT 8/26	M10 £66.00			
8.0 10.0	mm 26.0 30.0	47.0 50.0	Ref. ROT 8/26 ROT 10/30	M10 £66.00 +£64.50			
mm 8.0 10.0 12.0	mm 26.0 30.0 15.0	mm 47.0 50.0 43.0	Ref. ROT 8/26 ROT 10/30 ROT 12/15	M10 £66.00 +£64.50 +£47.00			
mm 8.0 10.0 12.0 12.0	mm 26.0 30.0 15.0 23.0	mm 47.0 50.0 43.0 43.0	Ref. ROT 8/26 ROT 10/30 ROT 12/15 ROT 12/23	M10 £66.00 +£64.50 +£47.00 £66.00			
mm 8.0 10.0 12.0 12.0 12.0	mm 26.0 30.0 15.0 23.0 38.0	mm 47.0 50.0 43.0 43.0 58.0	Ref. ROT 8/26 ROT 10/30 ROT 12/15 ROT 12/23 ROT 12/38	M10 £66.00 +£64.50 +£47.00 £66.00 £85.50			



RADE RANGE ROUTER CUTTERS ®



Individual Trade Range cutters are supplied in tough plastic packaging to provide excellent protection.

D

inch

1/8

5/32

13/64

1/4

1/4

5/16

3/8

25/64

25/64

15/32

15/32

15/32

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

1/2

5/8

3/4

15/32 12.0

D

mm

3.2

4.0

5.0

6.0

6.3

6.3

8.0

9.5

10.0

10.0

12.0

12.0

12.0

12.7

12.7

12.7

12.7

12.7

12.7

12.7

12.7

12.7

15.0

15.9

19.1

С

mm

12.7

11.0

16.0

16.0

16.0

25.0

19.0

25.0

19.0

35.0

19.0

19.0

63.0

63.0

19.0

25.0

32.0

38.0

50.0

50.0

63.0

63.0

25.0

19.0

25.0

50.0

Product

Ref.

TR01

TR02

TR03

TR04

TR05

TR06

TR07

TR08

TR09

TR10

TR11

TR12

TR37

TR37M

TR13

TR14

TR15

TR16

TR17

TR17D

TR17M

TR18D

TR40D

TR19

TR20

TR18

Trade Range router cutters have extra long shanks & are specifically designed to meet the demanding needs of the professional tradesmen.

- Feature 2mm micrograin Tungsten Carbide tips, for cutting the most abrasive materials to give extra long life.
- PTFE coated, indicated by distinctive black colouring.
- Can be used on hardwood & softwood, fibreboard, plywood and particle board.

Shank Diameter

12mm

-

-

-

-

_

£15.50

£19.50

L £26.00

£16.00

£20.00

£20.50

-

£22.50

-

_

w £19.50

♦₩ £23.00

8mm

★ £14.50

★ £14.50

★ £13.00

£13.50

£13.00

£16.00+

£15.00

£15.50+

£15.50

£17.00

£15.50

£16.00

-

-

-

-

-

-

£19.00

£19.00

1/2"

-

-

_

£15.50

£19.50

-

L £26.00

L £26.00

£16.00

£20.00

£20.50

w £19.50

W£19.50

\$ £26.50

\$\$ £20.00

£22.50

-

♦₩ £23.00

Etched dimensions on extra long 40mm shanks, for quick identification.

1/4"

★ £14.50

★ £14.50

★ £13.00

£13.50

£13.00

£16.00

£15.00

£15.50

£15.50

£17.00

£15.50

£16.00

-

-

-

£19.00

£19.00

£20.00

♦H £19.50 ♦H £19.50

Two Flute Straight

Gives a clean finish to abrasive materials such as chipboard, MDF, plywood and certain hardwoods. For housing, grooving and mortising.



tronc	trenc	Description	Product		Sha	ank Diamet	er
	٩		Ref.	1/4"	8mm	12mm	1/2"
		3 x TR09	TR/PACK/1	£35.50	£35.50	-	-
		3 x TR17	TR/PACK/2	-	-	£47.50	£47.50
		3 x TR17D	TR/PACK/3	-	-	£59.00	£59.00
	L	0 / 111110				~00.00	~00.00

Kitchen Fitters Packs Packs of cutters aimed at kitchen fitters.

- 4 piece

Pack 1 Comprises: 2 x worktop 1 x long ser 1 x guided l		trand	trend	frend'a
	l trond" l trond	trond'	I trend'	trend'
1/2" st Compr			I	

omprises:	D mm	C mm	Product Ref.
x worktop cutter	12.7	50.0	TR17DX1/2TC
x long series worktop cutte	r 12.7	63.0	TR18X1/2TC
x guided laminate trimmer	12.7	25.4	TR26/1/4TC
			NEW
Pack 3 - 5 piece	(no cen	tre tips)	in clam shell
1/2" shank	TI	R/KFP/:	£70.00
Comprises:	D mn	n Cn	m Product Ref.
5 x worktop cutter	12.7	' 50	0 TR17X1/2TC

Product

Ref. TR/KFP/1

>	I trond"	trend's	- nead -	i tend	Pack Comprise 2 x work 1 x guide 1 x biscu
I	1 trend"	1 trend.	1 trend'=	trend"= trend"=	Pack

Pack 2 - 4 piece	Product Ref.		Price	
	TR/	KFP/2	£73.50	
Comprises:	D mm	Cmm	Product Ref.	
2 x worktop cutter	12.7	50.0	TR17DX1/2TC	
1 x guided laminate trimmer	12.7	25.4	TR26X1/4TC	
1 x biscuit jointer	37.2	4.0	TR35X1/2TC	
Pack 4 - 5 piece in cla	m shell		NEW	

1/2" shank	TR	/KFP/4	£87.00
Comprises:	D mm	C mm	Product Ref.
5 x worktop cutter	12.7	50.0	TR17DX1/2TC



Price

£62.50





For deep mortising & grooving giving good chip clearance. Will plunge to a depth of 70mm in a number of passes.




Bearing Guided Trimmer &

Profilers

trend

For trimming & bevelling timber, lippings & plastic laminate edges. Ref. TR27 is triple fluted for extra fine

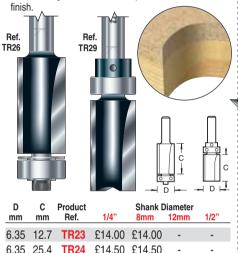

6.35	12.7	TR23	£14.00	£14.00	-	-
6.35	25.4	TR24	£14.50	£14.50	-	-
9.5	12.7	TR25	£17.00	£17.00	-	-
12.7	25.4	TR26	£19.00	£19.00	-	-
12.7	25.4	TR27	£23.50	£23.50	+ -	-
12.7	50.0	TR28	-	-	£34.00	£34.00


Shank Mounted Guided Profiler


For trimming & profiling timber & man-made board.

D mm	C mm	Product Ref.	1/4"	Shank D 8mm	iameter 12mm	1/2"
12.7	25.4	TR29	£20.50	-	-	-
16.0	25.4	TR29A	-	£20.50	-	-
19.1	50.0	TR30	-	-	£38.50	£38.50

Shank Mounted Bearing Guided

Intumescent Recesser For 4.0mm thick strip. Ref. TR41 is for 10.0mm wide and Ref. TR42 is for 15.0mm wide intumescent strip.



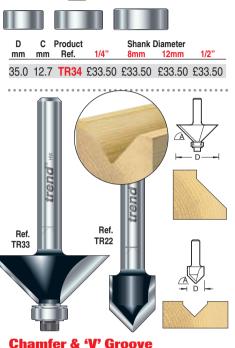

Bearing Guided

Includes 3 extra bearings. Tool

creates rebates 7.9mm, 9.5mm,

TR/B95A, TR/B16A & TR/B19A.

11.1mm & 12.7mm. Bearing Refs.

Rebater

С

÷

D

Chamfer & 'V' Groove

Ideal for fast chamfering to remove edge on timber or create a decorative edge.


Bearin	g Guid	ed		
A Deg.	D mm	Product Ref.	Shank 1/4"	Diameter 8mm
45°	31.8	TR33	£26.00	£26.00
Withou	t Boar	ina		

A

3°

3°

withou	it Dear	my			1000
Α	D	Product	Shank	Diameter	12
Deg.	mm	Ref.	1/4"	8mm	_ :
45°	12.7	TR22	£15.50	£15.50	

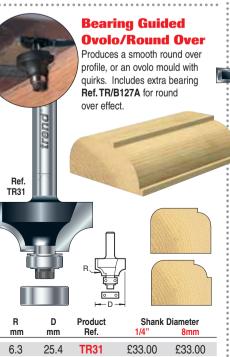

Radius Cutter For edge coves & fluting. С Shank Diameter Product R mm Ref. mm 8mm 5.0 18.0 £18.50 **TR21** £18.50 Shank Mounted **Bearing Guided Door** Leading Edge 3° undercut router bits for routing a leading edge on doors to allow a tight fit against jamb. 8.0mm shank for medium or heavy duty routers only. Ref. **TR38** Door edge С Product Shank Diameter Deg. 1/2 mm Ref. 8mm 12mm 38.1 £35.50 **TR38** 50.0 **TR39** £56.00 £56.00 . **Bearing Guided Biscuit Jointer Set** Enables biscuit jointing with timber,

man-made fibre & particle board. The correct choice of bearing will ensure the correct depth of cut for biscuit sizes No.0, 10 & 20. Includes extra bearing Refs. TR/B16A & TR/B19A.

					1		
				•••			
D mm	C mm	Produ Ref.			nank l nm	Diameter 12mm	1/2"
37.2	4.0	TR3	5 £38.	00 £38	3.00	£38.00	£38.00
Bea	rin	gs .	B mm	D mm	Pro	duct Ref.	Price
Spare	ball		3.2	6.35	TF	/B63B	£4.00
bearin	gs fo	r	4.75	9.5	TF	R/B95A	£9.00
cutters	S.	_	4.75	12.7	TF	B127A	£5.00
			4.75	15.9	TF	R/B16A	£8.50
6	N		4.75	19.1	TF	R/B19A	£8.00
100	2		6.35	12.7	TF	R/B127	£5.00
⊢	D	۹ (8.0	16.0	TF	R/BB16	£8.00
			12.7	19.1	TF	R/B19C	£8.50
	B -	_					

trend

0 0

TRADE RANGE ROUTER CUTTERS

٢

All prices are exclusive of VAT

9.5

31.7

TR32

£35.00

£35.00

CRAFTPRO ROUTER CUTTERS

CRAFTPRO router cutters are specially designed to meet the needs of the woodworker and tradesman for quality and performance.

Include these unique features:

- Microgranular Tungsten Carbide tips to ensure a perfect sharpness.
- Highly ground tip face to ensure it maintains its edge.
- PTFE non-stick coating on the body to minimise resin and heat build-up for longer life.
- Extra long shanks, ideal for router table use.

ROUTER CUTTER GRADE

Tungsten Carbide Tipped Cutters

This grade of cutter has Tungsten Carbide Tips brazed onto a steel body and is designed to cut the most abrasive materials. With careful handling, they will outlast HSS grade cutters by many times under normal conditions. Small sized cutters have a solid carbide insert.

Applications: Cutting, routing and profiling natural timbers, plywood, MDF, chipboard and abrasive plastics such as solid laminate.

STRAIGHT FLUTED	trend =	81
TRIMMERS	trend"	82
REBATE CUTTERS	I Irend	82
PROFILERS & CHAMF	ER trend	83
DOVETAIL & DOWEL D		84
JOINTERS		85
OVOLO & ROUND OVE	R Trend-	85-86
HANDRAIL CUTTERS	trend'-	86
RADIUS & CAVETTO	trend -	87
BEADS/CORNER MOU	ILDS	88
OGEE CUTTERS	tend -	89-90
PROFILE SCRIBING		91
PANEL RAISERS & SE	rs	92-93
BISCUIT JOINTER & SLOTTERS	trend	94
WEATHERSEAL, INTUMESCENT & KITCHEN FITTERS PAC	CKS	95-96

TET STRAIGHT FLUTED

Ref.

C002

С

trend

Ref.

C030

Two Flute Straight

- Suitable for a wide range of applications such as engraving, grooving, rebating and shallow mortising.
- Use on softwoods, hardwoods, MDF, plywood and chipboard.
- All cutters have a bottom cut feature.

All	cutters h	have a be	ottom cu	it feature.	H	D-I 🔽		
D inch	D mm	C inch	C mm	Product Ref.	1/4"	Sha 8mm	ink Diameter 12mm	1/2"
5/64	2.0	-	5.0	C001C	★£11.50	-	-	-
- 1/8	3.0	3/8	9.5	C001A C001	★ £9.00	★ £9.00	-	-
1/8	3.2 3.2	3/8 1/2	9.5 12.7	C001B	★£11.50 ★£12.00	-	-	-
5/32	4.0	7/16	11.1	C001B	★£12.00	±£10.00		-
3/16	4.8	7/16	11.1	C003	★£11.00	-	-	-
13/64	5.0	5/8	16.0	C004	★ £7.50	★ £7.50	-	-
15/64	6.0	5/8	16.0	C005	£8.00	£8.00	-	-
-	6.0	-	25.0	C005A	-	£8.50	-	-
-	6.0	-	20.0	C005B	£8.50	£8.50	-	-
1/4 1/4	6.3	1/2 5/8	12.7 15.9	C006 C006A	£8.50 £7.50	-	-	-
1/4	6.3 6.3	3/4	19.1	C008A	£7.50 £7.50	£7.50		-
1/4	6.3	1	25.4	C008	£9.50	£9.50	-	£9.50
9/32	7.1	3/4	19.1	C009	£7.50	-	-	-
9/32	7.1	1	25.4	C010	£9.50	-	-	-
5/16	7.9	3/4	19.1	C011	£8.50	£8.50	-	-
5/16	7.9	1	25.4	C012	£9.50	£9.50	-	£9.50
-	8.0	-	25.0	C012A	£9.50	£9.50	-	-
23/64	9.0	3/4 3/4	19.0 19.1	C012B C013	£9.00 £9.50	-	-	-
3/8 3/8	9.5 9.5	3/4 1	25.4	C013 C014	£9.50 £10.00		-	-
3/8	9.5	1-1/4	31.8	C014	£10.00	£11.00	-	£10.00
25/64	10.0	3/4	19.1	C016	£11.00	£11.00	-	£11.00
25/64	10.0	-	35.0	C016A	-	-	-	£11.00
-	10.0	1-1/4	32.0	C016B	-	£11.00	-	-
7/16	11.1	3/4	19.1	C017	£11.00	-	-	-
7/16	11.1	1	25.4	C018	£11.00	•	-	-
7/16	11.1	1-1/4	32.0	C018A	£11.50	-	-	-
15/32 15/32	12.0 12.0	3/4 3/4	19.1 19.0	C019 C019A	£11.00 H � £14.50	£11.00	-	-
15/32	12.0	1-1/4	32.0	C171	£13.00	£13.00	-	£14.50
15/32	12.0	2	50.0	C200	-	-	-	£12.50
15/32	12.0	2	50.0	C200D	-	-	♦ £18.50	♦ £18.50
15/32	12.0	2-1/2	63.0	C172	-	-	£18.50	£22.50
15/32	12.0	2-1/2	63.0	C172M	-	•		£22.50
1/2	12.7	1/2	12.7	C124	£8.50	-	-	-
1/2 1/2	12.7 12.7	3/4 1	19.1 25.4	C020 C021	£11.00 £12.00	£11.00 £12.00	-	£12.00
1/2	12.7	1	25.4	C021A	£12.00 £11.50	£12.00 £11.50	-	£12.00 -
1/2	12.7	1-1/4	31.8	C022	£13.00	£13.00	-	£14.50
1/2	12.7	1-1/2	38.0	C022A	-	-	-	£15.50
1/2	12.7	2	50.0	C153	-	-	-	w £13.00
1/2	12.7	2	50.0	C153D	-	•	w � £20.50	w £20.50
1/2	12.7	2	50.0		-		-	w £13.00
1/2	12.7	2-1/2	63.0	C164	£13.00	-	-	w £18.50
9/16	14.3 14.0	3/4 3/4	19.1 19.0	C023 C023A	£13.00 £12.50	- £12.50	-	-
-	14.0	- 3/4	25.0	C023A	£12.00 -	£12.50	-	-
9/16	14.3	1	25.4	C024	£13.00	-	-	-
-	15.0	-	25.0	C024A	£12.00	-	-	-
5/8	15.9	1/2	12.7	C125	£9.50		-	-
5/8	15.9	3/4	19.1	C025	£13.00	-	-	-
5/8	15.9	1	25.4	C026	£13.50	£13.50	-	£13.50
-	16.0	3/4	19.0 25.0	C025A	£13.00	£13.00	-	-
- 5/8	16.0 16.0	2	25.0	C025B	-	£13.50 -		£27.00
11/16	17.5	3/4	19.1	C025D	- £12.00	-	-	£27.00 -
11/16	17.5	1	25.4	C028	£12.00	-	-	-
-	18.0	-	25.0	C028A	£13.00	£13.00	-	-
3/4	19.1	3/4	19.1	C029	£12.00	£12.00	-	-
3/4	19.1	1	25.4	C030	£13.00	-	-	£13.00
-	20.0	-	20.0	C030A	£13.00	£13.00	-	-
13/16	20.6	3/4	19.1	C031	£13.00		-	-
7/8	22.2 25.0	3/4 3/4	19.1 19.0	C032 C033A	£13.00 £15.50	- £15.50	-	-
-	25.4	3/4	19.0	C033A	£15.50 £15.50	£15.50 -	-	£15.50
	20.4	0/4	13.1	0000	210.00	-	-	215.50


KEY TO PRODUCT REFERENCES

Suffix M = Short shank for Makita 3600B & 3612BR, Ryobi & Hitachi routers.

- ★ These cutters have Solid Carbide inserts rather than brazed tips.
- Centre tip for plunge cutting in abrasive materials.
- H Extra long shank 70mm overall length suitable for Trend Hinge Jig.
 W For use with Trend worktop jigs.
- Note Diameter dimensions in **bold** denote exact size.

- Single Flute Straight
- Single fluted Tungsten Carbide straight cutters for fast free cutting.
- Single flutes should be chosen where speed and clearance rates are more important than the finish.
- Depth of cut should not exceed cutter diameter.

Ref. C038

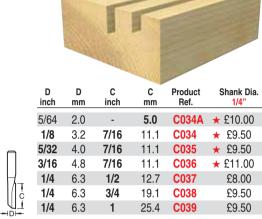

Mortise & Tenon Cutter Sets

- Set of five long reach straight cutters with diameters of 1/4" to 5/8".
- Suitable for use with the Trend Mortise & Tenon Jig.
- Each set comprises one of each of the individual cutters below.

_	=					
	D inch	D mm	C inch	C mm	Product Ref.	
	1/4	6.3	1	25.4	C008	
	5/16	7.9	1	25.4	C012	
	3/8	9.5	1-1/4	31.8	C015	
	1/2	12.7	1-1/4	31.8	C022	
	5/8	15.8	1	25.4	C026	

Sets comprising of cutters above

With 1/4" shank	
With 8mm shank	
With 1/2" shank	


SET/MT1X1/4TC SET/MT1X8MMTC SET/MT1X1/2TC SET/MT1X1/2TC

a.

Mortiser

rend

- TCT cutter with staggered cutting tips.
 - Deep mortising and grooving giving good chip clearance.
- For lock mortising, two width cuts will be needed to achieve the standard 19mm mortise.
- Will plunge and clear chips to a depth of 70mm in a number of passes.
- Take several passes to avoid cutter breakage and motor overload.

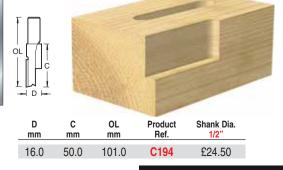








TET TRIMMER CUTTERS

OUTER CUTTERS Bearing Guided 90° Ref. C117 **CRAFTPRO** R(D С Product mm mm Ref. 12.7 6.35 C167 25.4 6.35 C168 9.5 12.7 C115 12.7 25.4 C116 12.7 38.1 C196 50.0 12.7 C195 15.9 15.9 C117 **Bearing** overlay. Ref. C134

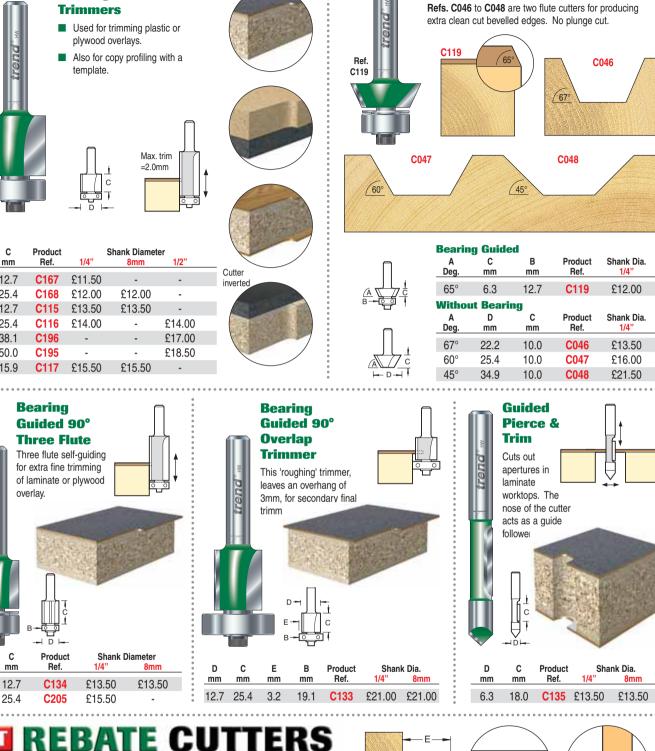

Bearing Guided Rebaters

These cutters are self-guiding and can be used to produce rebates, lap joints, tongues and rebated corners.


When using bearing Ref. B95A make two passes when a full depth of cut is required.



irena

Ref

C040

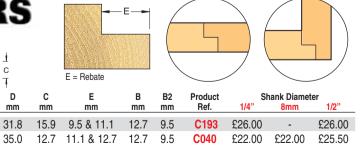

Alternative Bearings

С

T F

÷

B2 --- • •

C193 Rebate	C040 Rebate	Product Ref.	Price
7.9	9.5	B16A	£4.75
6.35	7.9	B19A	£6.00
4.9	6.5	B22A	£8.50
3.4	5.0	B25A	£8.50





D

mm

12.7

12.7

С

All prices are exclusive of VAT

Bevel Trimmers

Ref. C119 is bearing guided and gives a smooth bevel finish for laminates and other materials. Bearing follows the board beneath.


Refs. C046 to C048 are two flute cutters for producing

1/4'

1/4"


8mm

TEMPLATE PROFILERS

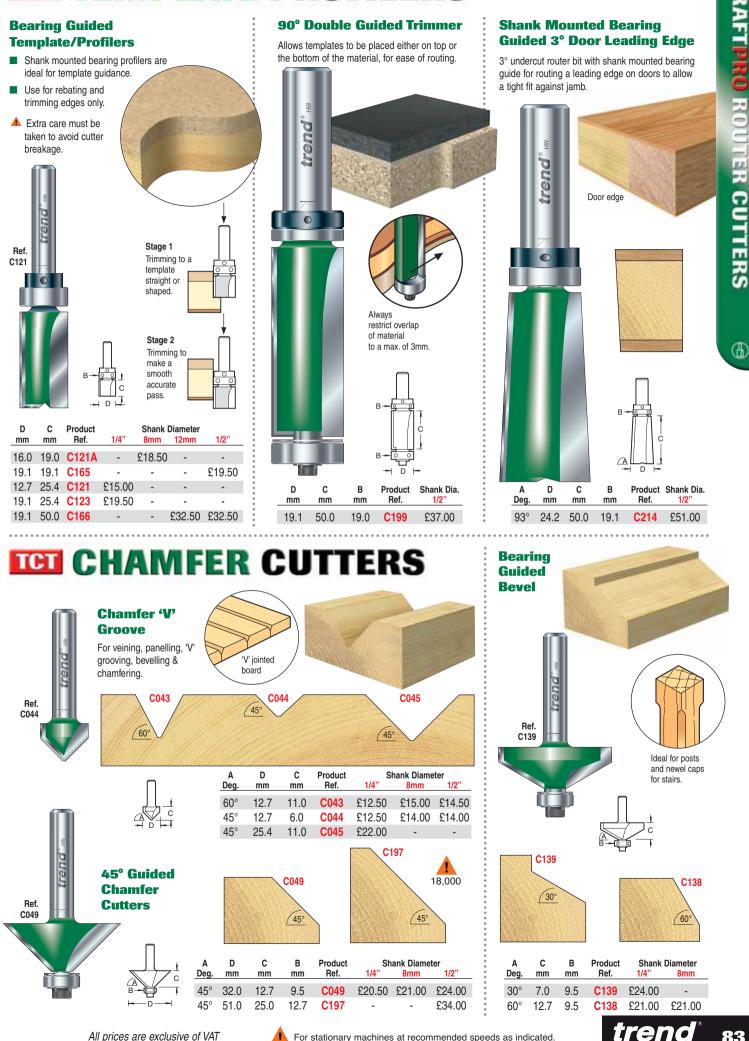




DOVETAILS & DOWEL DRILLS

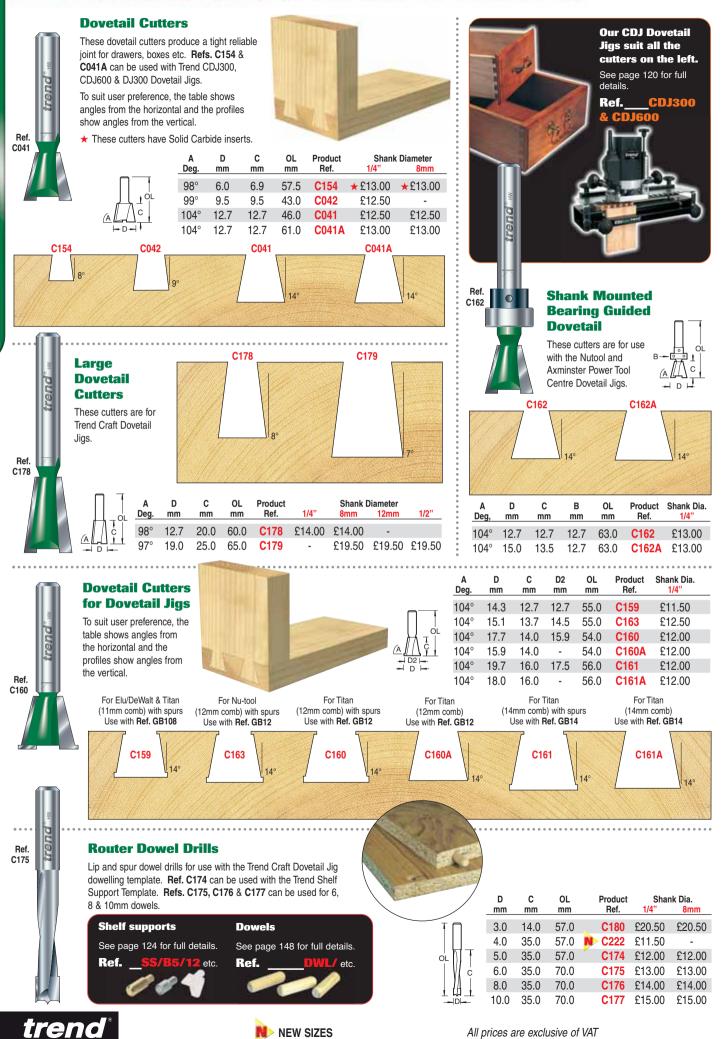

All prices are exclusive of VAT

Œ

ICI JOINTING CUTTERS

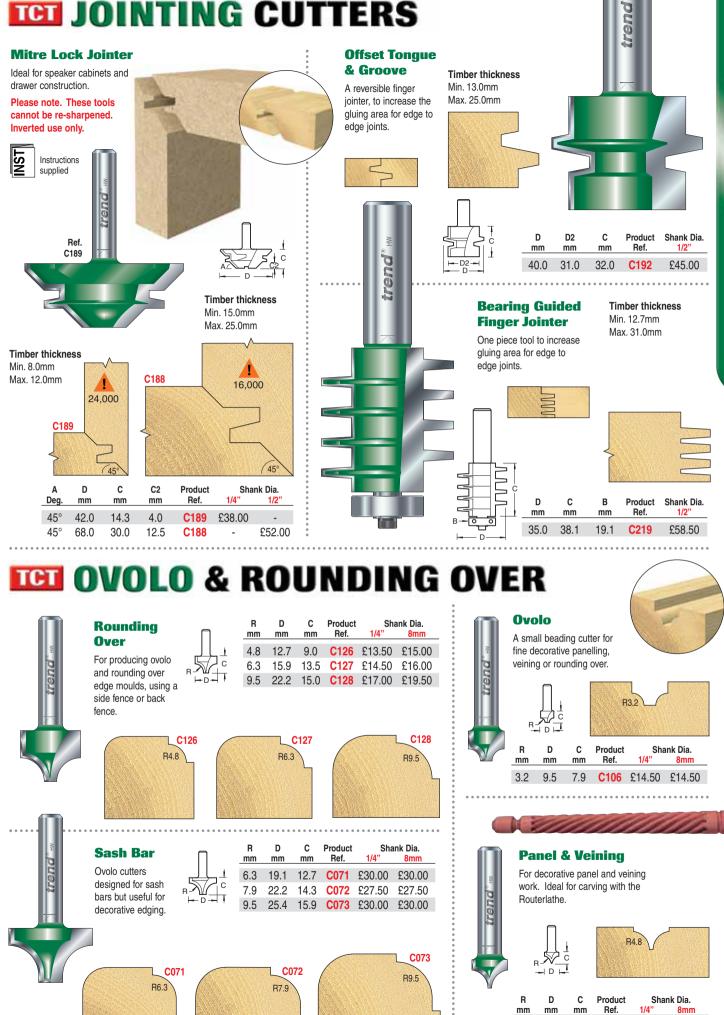

All prices are exclusive of VAT

For stationary machines at recommended speeds as indicated.

4.8

9.5

7.5

C141 £17.50 £17.50

trend

85


CRAFTPRO ROUTER CUTTERS


⊕




Bearing Guided Round Over & Ovolo

Self-guiding cutters for rounding over edges do not require a side fence. They are supplied with two bearings. Use the larger bearing for a round-over. If the cutter is lowered, a top quirk can be produced. Bullnose mouldings can also be produced by taking a second pass from the opposite side of the workpiece.








C078 R9.5

R2

B1

R6.3


C076



949-93 1	S(52,82) (A) (8)	RIGHTER				20030040000000000	In the second	A CONTRACTOR OF CONTRACT	
ı	R inch	D mm	C mm	B mm	B2 mm	Product Ref.	S 1/4"	hank Diame 8mm	ter 1/2"
2	1/8	19.0	9.5	9.5	12.7	C 074	£20.00	£20.00	-
3	3/16	22.0	12.7	9.5	12.7	C075	£22.00	£22.00	-
3	1/4	25.4	12.7	9.5	12.7	C076	£24.50	£24.50	£24.50
)	5/16	28.5	12.7	9.5	12.7	C077	£26.50	£26.50	-
5	3/8	31.7	15.9	9.5	12.7	C078	£28.50	£28.50	£28.50
7	1/2	38.0	19.1	9.5	12.7	C079	£31.50	£31.50	£31.50
0	5/8	44.5	22.0	9.5	12.7	C198	-	-	£27.00

R4.8

C075

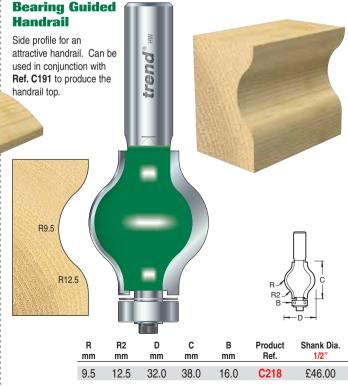

used in conjunction with Ref. C218.

12.000


R

mm

51.0

82.7

19.0



12.7




R51

C191

£63.50


For stationary machines at recommended speeds as indicated.

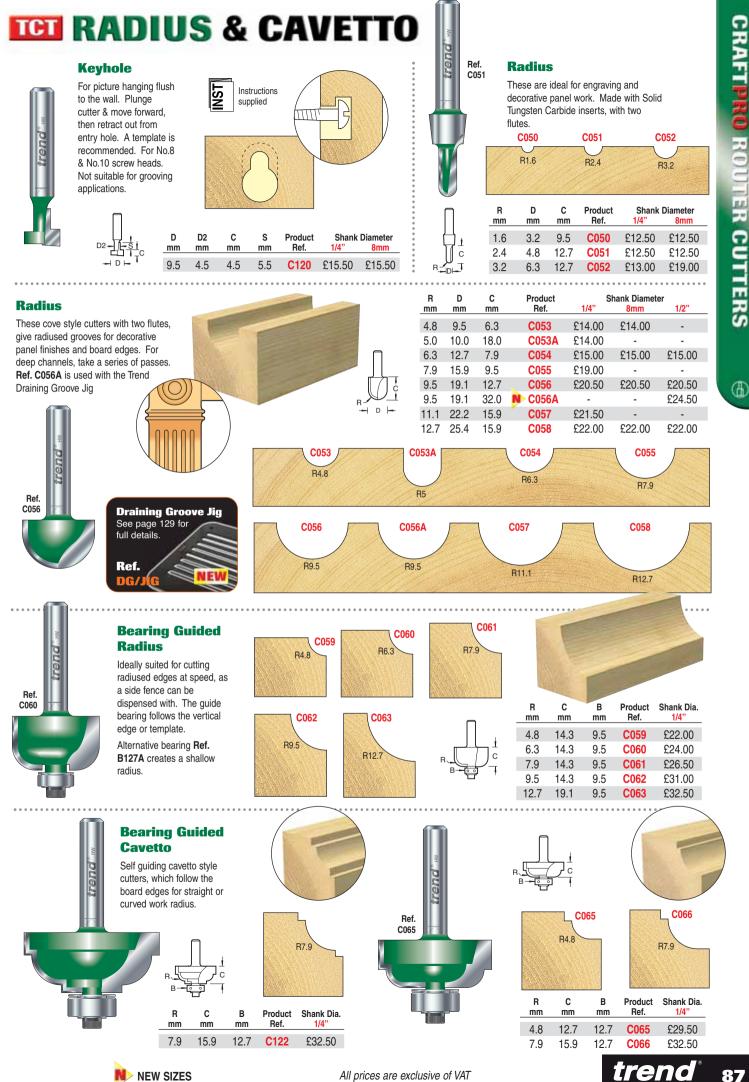

87

CRAFTPRO ROUTER CUTTERS

BEADS & CORNER MOULDS

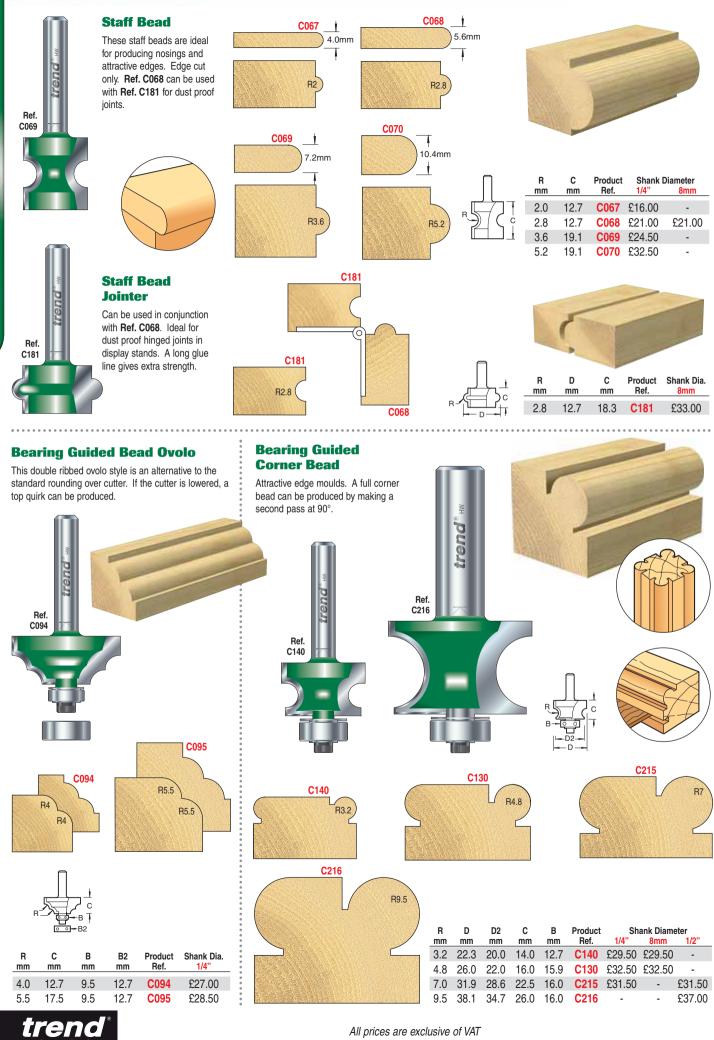

All prices are exclusive of VAT


CRAFTPRO ROUTER CUTTERS

1

ICI OGEE CUTTERS


Ogee Panel


Small panelling cutters, popular for decorative cupboard doors and furniture embellishments.



R	D	C	Product Ref.	Shank	Diameter 8mm
mm 2.0	mm 12.7	mm 9.5	C107	£20.50	£20.50
3.2	19.1	11.1	C108	£26.50	£26.50

Classic Decor






	R	R2	D	С	Product	Shar	ik Dia.	
	mm	mm	mm	mm	Ref.	1/4"	8mm	
Î	3.2	4.0	12.7	9.5	C109	£24.50	£24.50	
	4.5	4.5	19.1	14.0	C110	£30.50	£30.50	

Ideal for solid panel

wardrobe

doors

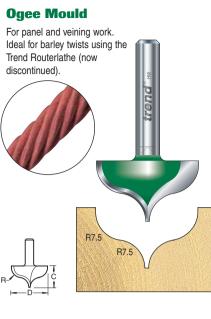

R	D	C	Product	Shank	Diameter
mm	mm	mm	Ref.	1/4"	8mm
7.5	27.0	16.0	C142	£32.50	£32.50

22.0 C131 £32.50

35.0 C201

£32.50

2.4 22.0 10.0

5.2

35.0 14.0

Shank Mounted Bearing Guided Classic Decor

Ideal for following template. It is advisable that the template is at least 5mm thicker than the cut length of tool. irend Template Ref. R4 C111 C203 R6.3 C203 R5.5 Ref. R10.3 C111 с в Product Shank Diameter R R2 D mm Ref. 1/4" mm mm mm mm 8mm £32.50 £32.50 4.0 5.5 22.0 12.7 22.0 C111 С 6.3 10.3 35.0 14.3 35.0 C203 £36.00 _ _ - D **Shank Mounted** Ideal for drawer **Bearing Guided** fronts **Classic Panel** Ideal for following template. It is advisable that the template is at least trend 5mm thicker than the cut length of tool. Template R2. C201 Ref. C131 R5.2 C201 Ref. C131 R D С B Product Shank Diameter mm mm mm mm Ref. 1/4 1/2" 8mm

All prices are exclusive of VAT

£36.00


1

Bearing Guided Ogee Mould Supplied with extra 1/2" bearing for removing the lower quirk. Ref. C099 C098 C098 R5 R5 R4 R4 R R2 с в B2 Product Shank Dia. mm mm mm mm mm Ref. 1//" 8mm С £31.50 £31.50 5.0 4.0 12.7 9.5 12.7 C098 £32.50 £32.50 9.5 12.7 C099 6.3 4.8 17.5 **Bearing Guided Roman Ogee** By raising the cutter, the top quirk is removed. C087 C086 R6.3 Ref. R4 C086 R4 R6.3 R С В Product Shank Diameter 1/4" 1/2" mm mm mm Ref. 8mm 4.0 15.9 9.5 C086 £29.50 £29.50 £29.50

Bearing Guided Ogee Quirk

. . . .

By raising the cutter, the top quirk is removed. Alternative bearing - Refs. B95A & B127A.

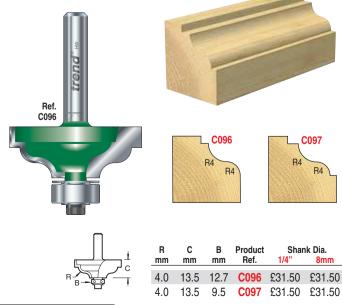


6.3 20.0 9.5

£32.50

C087

£32.50

Bearing Guided Broken Ogee

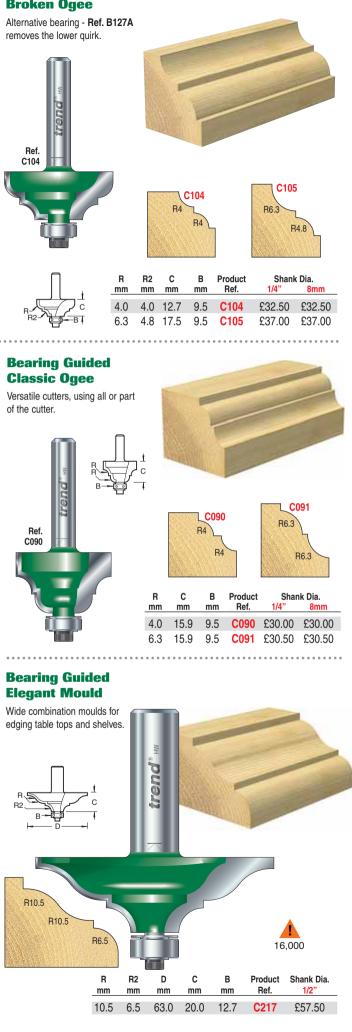



All prices are exclusive of VAT

TET PROFILE SCRIBING TOOLING

18.000

NST


supplied

Instructions

Combination & Easyset[™]

- The classic method of producing cabinet panelled door and drawer fronts is made easy with these Profile Scriber sets.
- With the combination type, components are re-arranged on the arbor to cut the profile or the scribe.
- The Easyset[™] system works by altering the height of the cutter.


Router table use only. 1/4" and 8mm shanks should only be used with a medium or heavy duty router. For certain routers the aperture in the base may need to be enlarged. A workholding device should be used when cutting the scribe cut on the rail ends. The cutting edges should be staggered to each other. When using Easyset™ cutters take several passes.

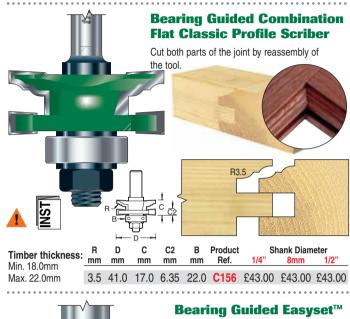

Ogee Profile Scriber Cuts both parts of the joint by only changing <u>NST</u>

mm


the cutter height. No reassembly of the tool is required so saving time.




Timber thickness: R Min. 18.0mm Max. 22.0mm


D С mm mm mm mm Ref. 8mm 12mm 1/2" 4.0 41.0 17.0 6.35 22.0 C155 £60.50 £60.50 £60.50

Spare Parts			
Profile block:	for C149 & C155	SP-C149A	£26.00
	for C156	SP-C156A	£26.00
	for C157 & C204	SP-C157A	£26.00
Groover:	for C149, C155, C157, C158 & C158	SP-C149C	£13.50
Bearing	22mmØ	BB22	£8.00
Arbor	for C149, C156, C157,& C158		
	- 1/4" shank	33/30X1/4	£6.50
	- 8mm shank	33/30X8MM	£6.50
	- 1/2" shank	33/30X1/2	£7.00
Arbor	for C155, & C204		
	- 8mm shank	33/31X8MM	£12.50
	- 1/2" shank	33/31X1/2	£12.50
Spare Spacer S	et	SPACER/8	£6.00





Bearing Guided Combination Ogee Profile Scriber

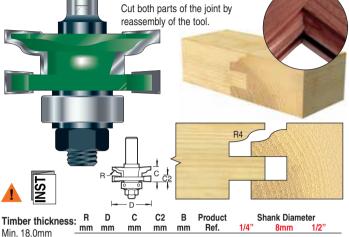


n. 18.0mm	mm	mm	mm	mm	mm	Ret.	1/4″	8mm	1/2″	_
ax. 22.0mm	4.0	41.0	17.0	6.35	22.0	C149	£43.00	£43.00+	£43.00	


Bearing Guided Combination Bevel Profile Scriber

Cut both parts of the joint by reassembly of the tool. <u>NS1</u> D Shank Diameter С в Product Α C2 Timber thickness: Ref. 1/2mm mm mm mm 8mm Min. 18.0mm

Max. 22.0mm


Ма

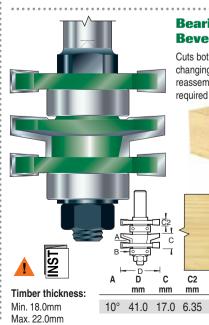

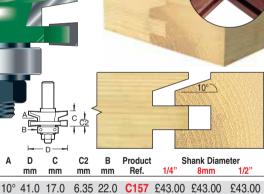


Bearing Guided Easyset[™] **Bevel Profile Scriber**

Cuts both parts of the joint by only changing the cutter height. No, reassembly of the tool is required so saving time.



22.0 C204 trend

TGT PANEL RAISERS

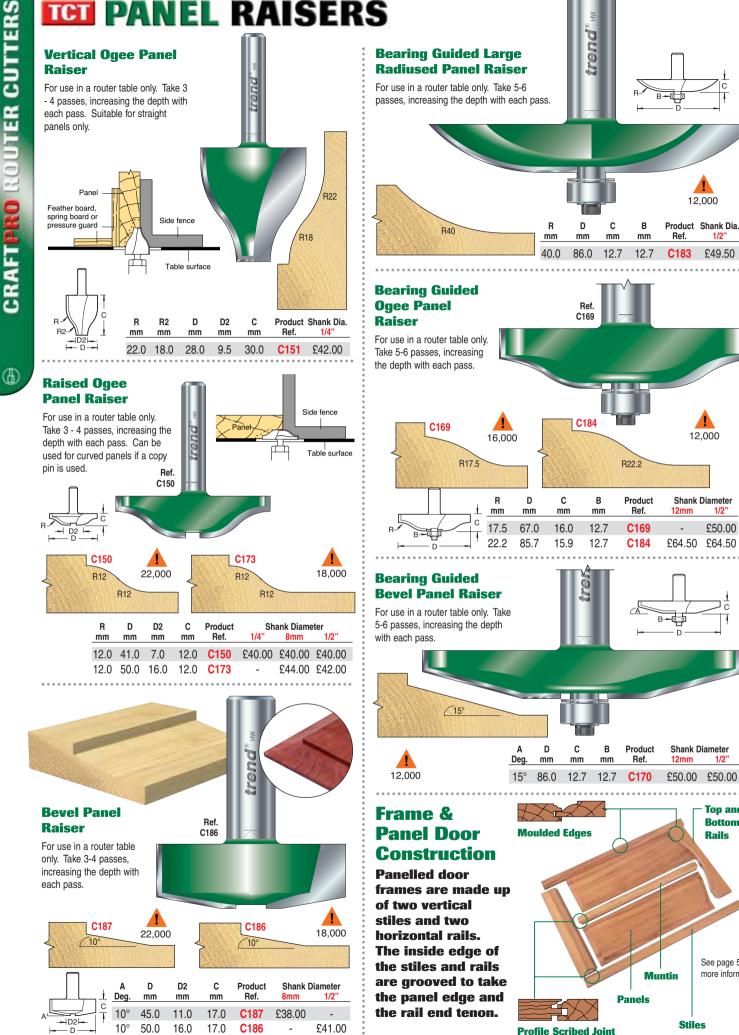

trend 92



12,000

12,000

1/2'

£50.00

1/2"

Top and

Bottom

See page 52 for


more information.

Rails

1/2'

£49.50

1

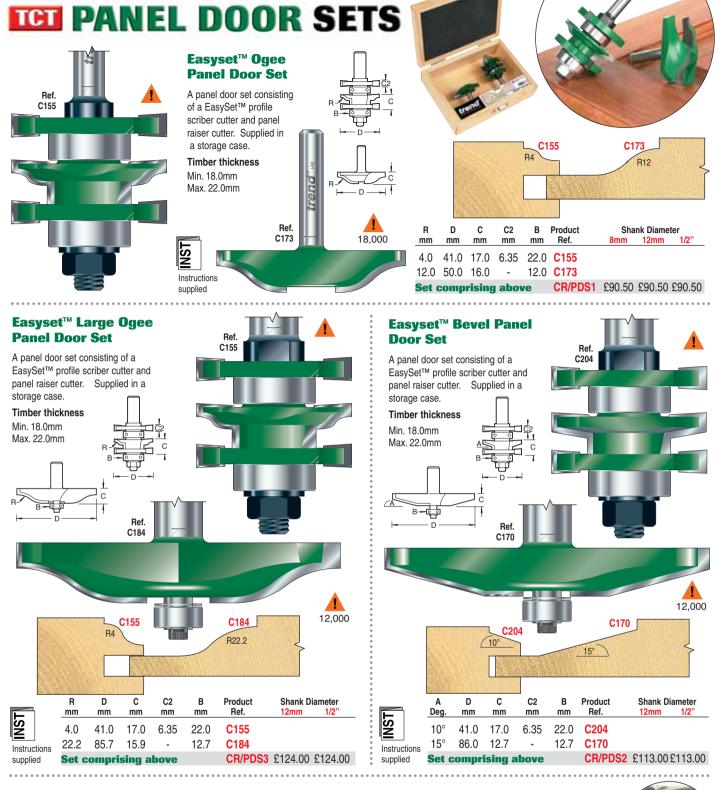

Using Profile Scribing Tooling



Cutting the Scribe

The timber of the rails or muntin should be cut square to length and mounted face up in a workholder or mitre fence to ensure a safe and accurate cut. The back fence should be set level with the bearing guide to automatically give the correct depth of cut. A spelch block, fitted to work-holder of the mitre fence will prevent breakout of the timber. Adjust the height of the set according to the thickness of the timber.



Cutting the Profile

Switch off the power to the router at the source. Leaving the tool set in the machine, the cutter now needs to be set up in the profiling mode. With the standard sets the components will need to be re-assembled, with the EasySet™ the height will need to be changed. With the sections to be machined face down, machine all profile edges, using a pushstick for final 300mm of cut.



Curved Rails


The top rail can be curved for a decorative effect, using a curved template made from MDF or plywood and a template profiling cutter. The curve on the rail is first sawn oversize using a bandsaw or jigsaw. The curved template is then fitted to the rail and the bearing on the profiling cutter follows the template and trims the component. The curved rail is then moulded as normal.



Profile scriber tools and sets are for router table use only. 1/4" and 8mm shanks should only be used in a medium or heavy duty router. For certain routers the aperture in the base may need to be enlarged. A workholding device should be used when cutting the scribe cut on the rail ends. The cutting edges should be be staggered to each other. When using Easyset™ cutters take several passes.

trend

TET BISCUIT JOINTER & SLOTTERS

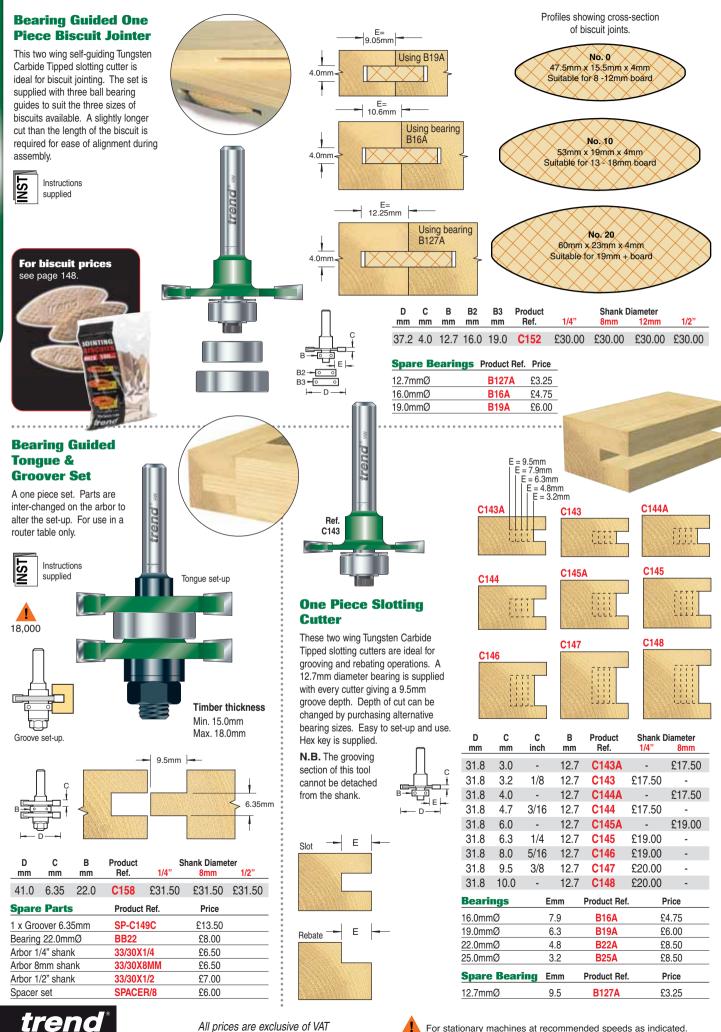


ER CUTTERS

1

94

For stationary machines at recommended speeds as indicated.

TGT WEATHERSEAL CUTTERS

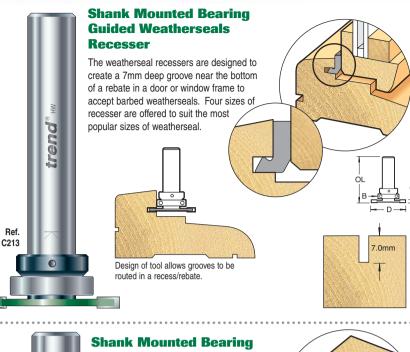

For perfect snipping and mitre cuts of weatherseal, mouldings & beading.

See page 148 for full details. Ref. с 01 Shank Dia р в Product mm mm mm mm Ref. 36.0 2.0 22.0 80.0 C210 £31.50 36.0 2.5 22.0 80.0 C211 £31.50 36.0 2.8 22.0 80.0 C212 £31.50 36.0 3.0 22.0 80.0 C213 £31.50

Alternative Bearings for other groove depths

Groove Depth mm	Bearing Ø mm	Product Ref.	Price
8.5	19.0	B19C	£4.75
6.5	23.0	B23C	£7.50
6.0	24.0	B24C	£7.50
5.3	25.4	B254C	£10.75
4.0	28.0	B28C	£11.50


Aquamac[®] 21 Strip

Aquamac[®] 21 strip is fitted into the frame rebate (head and jambs) as three cut pieces forming a compression or wiping seal. The seal is butt joined at the corners. To seal the door bottom. Schlegel® weather bar is mounted into the threshold section. It is important that the seal does not abut the weather bar but runs to the threshold section in front (weatherside) of it, to maximise water permeability resistance. 9.0mm



Aquamac[®] 63 Strip

four cut lengths. It is important to create tight butt or notched joints to ensure high levels of window performance. Joints can be enhanced by the application of a small amount of silicone mastic. When fitted, it is necessary to notch the seal end.

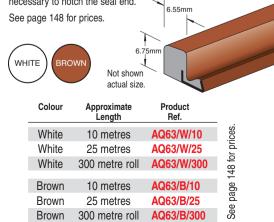

GRAFIPRO **IER CUTTERS**

Guided Aquamac® 21 Recesser

Ref. C207 recessing cutter will accommodate the Schlegel[®] Aquamac[®] 21 seal. This cutter is designed for use with the Aquamac seal in a wiping mode and comes complete with a guide bearing to reduce setting-up time and simplify machining operations.

trend

0


trend

18.000

Gap allowed for expansion when the door shuts - 13.0mm -


9 6mm

1/2

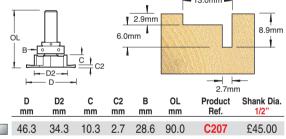

Shank Mounted Bearing Guided Aquamac[®] 63 Recesser

Ref. C206 is designed to accommodate the popular Schlegel[®] Aquamac[®] 63 weather strip system and allows for a particularly small gap between sash and frame. The slot can be positioned part way down the side of the rebate, or at the bottom of the rebate.

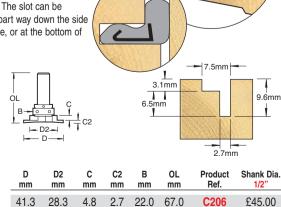

Aquamac[®] 63 strip is fitted into the frame aperture using

NTUMESCENT RECESSING TCT

- For either frame or door applications, with standard Intumescent Strip.
- Neatly cuts grooves on doors or frames to accept Intumescent Strip which enables the formation of effective barriers to both fire and smoke
- By using alternative ball bearing diameters, other seal thicknesses can be introduced.
- Alternative bearings can be purchased to suit other thicknesses.

Intumescent Strip

Strip

thickness

Frame Applications

One hour rating

T Strip

width

Half hour rating

1

4.0mm

Intumescent Strip

Strip thickness

set at 4mm

H

with Smokeseal



trend

Shank Mounted Bearing Guided Intumescent Recesser 1/4"

Shank For 4.0mm thick strip.

Ref. C209 is for 10.0mm width intumescent strip. Ref. C220 is for 15.0mm width intumescent strip.

D

Shank Mounted Bearing Guided Intumescent Recesser 1/2" shank

For 4.0mm thick strip. Ref. C208 is for 10.0mm width intumescent strip. Ref. C221 is for 15.0mm width intumescent strip.

D mm	C mm	B mm	E mm	Product Ref.	Shank Dia. 1/4"
24.0	10.0	16.0	4.0	C209	£23.50
24.0	15.0	16.0	4.0	C220	£24.50
			P	roduct	
Replac	cement	Parts		Ref.	Price
Slotter 1	0mm kerf		SF	P-C209C	£17.00
Slotter 15mm kerf		SF	P-C220C	£15.50	
Arbor for	· C209		33	/23	£7.00
Arbor for	C220		33	/25	£9.00
Bearing	16.0mmØ		B 1	6	£3.25

Alternative Bearings (for other strip thicknesses)

Strip Thickness mm	Bearing mmØ	Product Ref.	Price
3.0	18.0	B18	£8.00
2.0	20.0	B20	£8.00

D mm	C mm	B mm	E mm	Product Ref.	Shank Dia. 1/2"
40.0	10.0	32.0	4.0	C208	£34.00
40.0	15.0	32.0	4.0	C221	£35.00
			Pro	duct	

Replacement Parts	Ref.	Price
Slotter 10mm kerf	SP-C208C	£26.00
Slotter 15mm kerf	SP-C221C	£24.50
Arbor for C208	33/24	£8.00
Arbor for C221	33/26	£9.00
Bearing 32.0mmØ	B32	£8.00

Alternative Bearings (for other strip thicknesses)

Strip Thickness mm	Bearing mmØ	Product Ref.	Price
7.0	26.0	B26	£6.50
6.0	28.0	B28	£8.50
5.0	30.0	B30	£8.50
3.0	34.0	B34	£8.00
2.0	36.0	B 36	£8.00

KITCHEN FITTERS PACKS TCT

trend"	trend"s	trend'

Pack 1 - 4 piece		Product Ref.	Price
		CR/KFP/1	£58.50
Comprises	D mm	Cmm	Product Ref.
2x worktop cutter	12.7	50.0	C153DX1/2TC
1x long worktop cutter	12.7	63.0	C164X1/2TC
1x laminate trimmer	12.7	25.4	C116X1/4TC



Pack 2 - 4 piece		Product Ref.	Price
		CR/KFP/2	£67.50
Comprises	D mm	C mm	Ref.
2x worktop cutter	12.7	50.0	C153DX1/2TC
1x laminate trimmer	12.7	25.4	C116X1/4TC
1x biscuit jointer	37.2	4.0	C152X1/2TC



Pack 3 - 15 pie	ece	Product Ref.	Price
1/2" shank		CR/KFP/3	£51.00
12mm shank		CR/KFP/3X12M	M £51.00
Comprises	D mm	n Cmm	Ref.
1x worktop cutter	12.7	50.0	C153DX1/2TC
1x biscuit jointer	37.2	4.0	C152X1/2TC
3x metal connecting	bolts		
10x No. 20 biscuits			
	1/2" shank 12mm shank Comprises 1x worktop cutter 1x biscuit jointer 3x metal connecting	12mm shank Comprises D mm 1x worktop cutter 12.7 1x biscuit jointer 37.2 3x metal connecting bolts	CR/KFP/3 1/2" shank CR/KFP/3 12mm shank CR/KFP/3X12N Comprises D mm C mm 1x worktop cutter 12.7 50.0 1x biscuit jointer 37.2 4.0 3x metal connecting bolts State of the sta

Packs of cutters aimed at kitchen fitters. Packs include 1/2" diameter worktop cutters.



Pack 4 - 5 pie	ece	Product Ref.	Price
1/2" shank		CR/KFP/4	£81.00
Comprises	D mm	C mm	Product Ref.
5x worktop cutter	12.7	50.0	C153DX1/2TC

Pack 5 - 5 pie	ece		NEW
(no centre tip)		Product Ref.	Price
1/2" shank		CR/KFP/5	£56.50
Comprises	D mm	Cmm	Product Ref.
5x worktop cutter	12.7	50.0	C153X1/2TC


			NEW		
Pack 6 - 8 pie	ece	Product Ref.	Price		
1/2" shank		CR/KFP/6	£40.00		
Comprises	D mm	C mm	Product Ref.		
2x worktop cutter	12.7	50.0	C153DX1/2TC		
6x metal connecting bolts					


	1/2" shank
	12mm shank
a di seconda di s	Comprises
	1x worktop cut 1x biscuit jointe 3x metal conne 10x No. 20 bisc


12 Piece DOLLS HOUSE SET

Available in 1/4" & 8mm shanks

Designed to suit dolls house requirements at 1:12 scale & for all types of miniature or small scale work. It is advisable that the router is held inverted in a table with a small aperture in the table & fence. Moulds are machined on a wide piece of stock & then cut off using a mini circular saw. Extra care must be taken when setting-up to ensure the required mould is created.

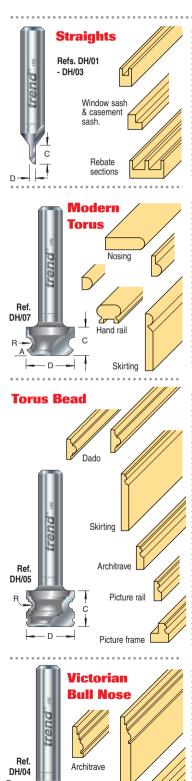


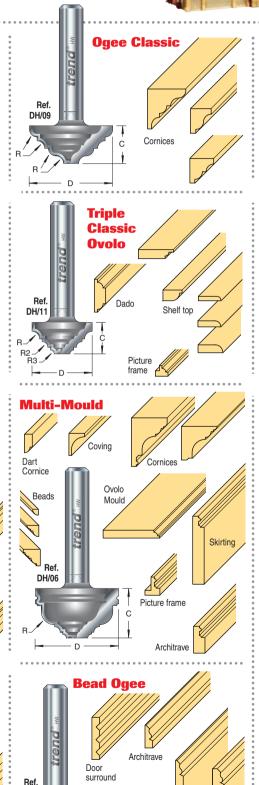

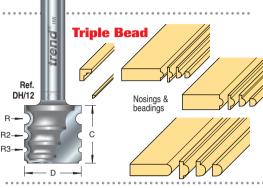

Supplied in a storage box

⋕

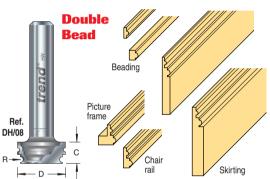

12 pi	ece C	utter	Sets	Р	roduct F	lef.	Price	D
With 1	/4" sha	Ink		SET/	DH1X1	/4TC	£113.00	
With 8	mm sh	ank		SET/	DH1X8	ммтс	£113.00	
Repla	iceme	ent C	utters	5				
D mm	C mm	A Deg.	R mm	R2 mm	R3 mm	Product Ref.	Shank Dia. 1/4" & 8mm	
1.6	5.0	-	-	-	-	DH/01	£16.00	
2.0	5.0	-	-	-	-	DH/02	£16.00	
3.2	8.0	-	-	-	-	DH/03	£16.00	
12.7	7.0	-	1.0	-	-	DH/04	£23.50	
12.7	9.5	-	1.0	-	-	DH/05	£23.50	
22.0	13.0	-	3.5	-	-	DH/06	£33.00	
12.7	7.5	45°	1.6	-	-	DH/07	£29.00	
12.7	5.5	-	0.8	-	-	DH/08	£29.00	
22.0	10.0	-	2.0	-	-	DH/09	£29.00	
12.7	5.1	45°	-	-	-	DH/10	£23.50	
15.9	8.3	-	2.0	1.5	1.0	DH/11	£29.00	

HAND MITRE SHEARS

0.75

DH/12

trend

£29.00

Chrome vanadium shears. For perfect mitre cuts of mouldings, beadings and weatherseals. Can be used on mouldings up to 10mm thick. Ideal for use with delicate dolls house mouldings.



1.5 1.0

-

15.0

15.2

Skirting

С

1

D

DH/10


Skirting

Door

surround

С

- D

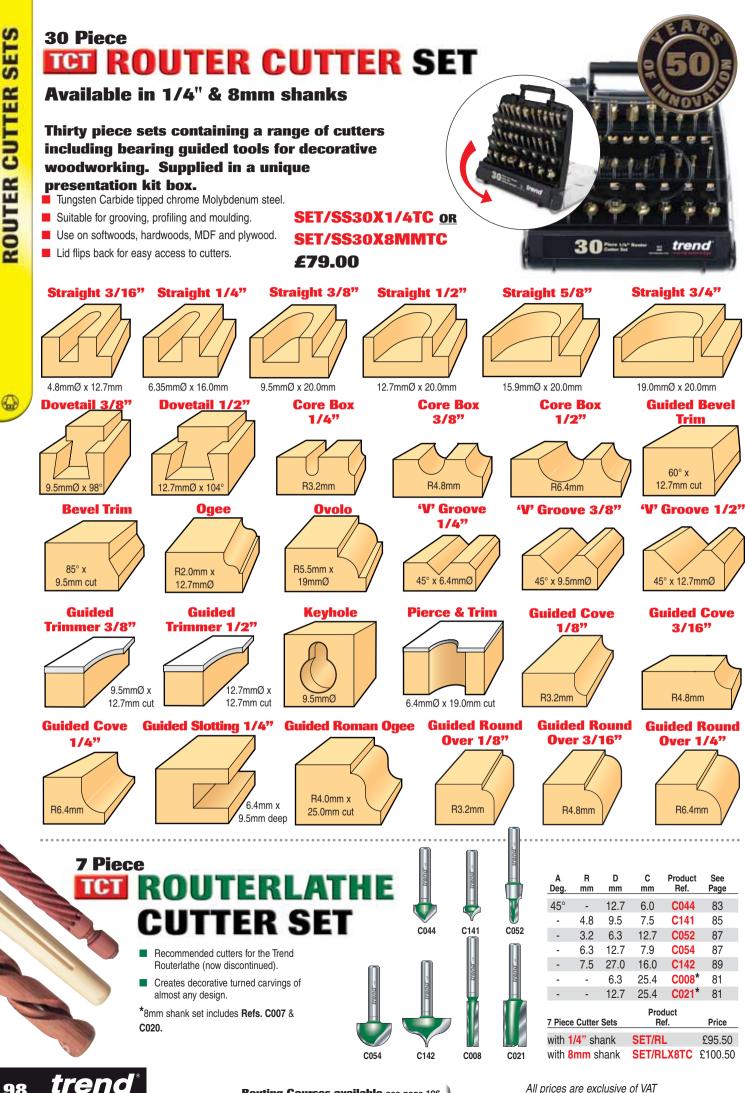

ROUTER CUTTER SET

Routing Courses available see page 196

ROUTER CUTTER SETS

Two Flute

1/2"

Over 3/8"

R9.5mm

Ogee 5/32"

R4.0mm

trend

/2"

12 Piece ICI STARTER SET

Available in 1/4" & 8mm shanks

Straight

1/2"

12.7mmØ x 19.0mm cut

Over 3/8"

R9.5mm

1/2"

1/4"

5/32"

R4.0mm

Straight

1/4"

6.3mm Ø x19.0mm

Guided

Round Over

1/4"

R6.35mm

Guided Rebater

3/8"

9.5mm rebate

'V' Groove

Excellent value for money. This twelve piece cutter set contains a range of the most widely used cutters for decorative woodworkina. **Supplied in plastic** carry case.


15 Piece IGI STARTER SET

Available in 12mm & 1/2" shanks


Fifteen piece cutter set. containing a range of popular cutters. Supplied in a plastic carry case.



SET/SS9X12MMTC OR SET/SS9X1/2TC £38.00

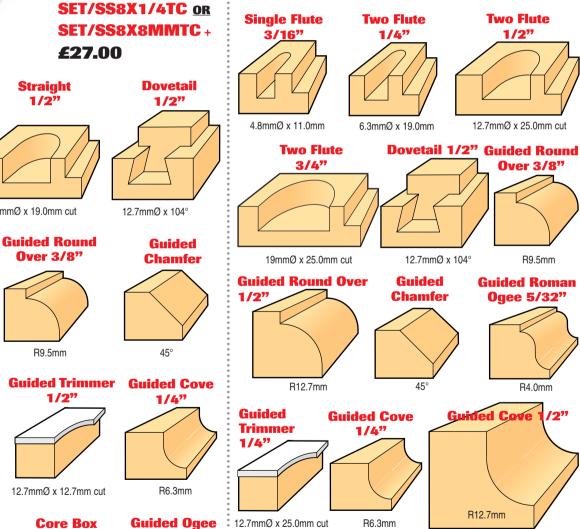

R12.7mm 12.7mmØ x 25.0mm cut R6.3mm Core Box 1/4" **'V' Groove Guided Rebater** 11.1mm rebate 45° R6.35mm



+ 8mm while stocks last.

Routing Courses available see page 196



Ð

SPARE PARTS FOR ROUTER CUTTERS



. Replacement **Bearings**

To order the correct replacement bearing, please use the chart above

Care and maintenance

Check bearings regularly for free running and replace if faulty.

Bearings are shielded to prevent penetration of dust and grease packed for life. They should not be cleaned with solvent or lubricated as this will dissolve the grease and cause premature bearing failure. Scrape off any resin build-up.

Ref. B182 is sleeved and can be reground.

Always check the tightness of the fixing screw before using cutter.

Bearing Size Conversion





	-		-	-	
0.0		T 1.1.1	Product	D . I	
OD	ID	Thickness	Ref.	Price	
1/4"	1/8"	7/64"	B63B	£3.75	
3/8"	1/8"	5/32"	B95B	£4.75	
3/8"	3/16"	1/8"	B95A	£3.75	
1/2"	1/8"	11/64"	B127B	£6.00	
1/2"	3/16"	3/16"	B127A	£3.25	
1/2"	1/4"	3/16	B127	£4.75	
14.0mm	3/16"	5.0mm	B14A	£8.50	
5/8"	1/8"	3/16"	B16B	£7.00	
5/8"	3/16"	3/16"	B16A	£4.75	
5/8"	1/4"	3/16"	B16	£3.25	
5/8"	3/8"	5/32"	B16D	£8.50	
16.0mm	5.0mm	4.9mm	B16F	£8.50	
16.0mm	8.0mm	5.0mm	BB16	£8.00	
17.0mm	1/4"	7/32"	B17	£8.50	
18.0mm	1/4"	7/32"	B18	£8.00	
18.2mm	1/4"	3/16"	B182	£7.00	
19.0mm	6.0mm	6.0mm	B19H	£6.00	. :
3/4"	1/8"	3/16"	B19B	£7.50	
3/4"	3/16"	3/16"	B19A	£6.00	
3/4"	1/4"	9/32"	B19	£3.25	
3/4"	1/2"	5/32"	B19C	£4.75	
20.0mm	1/4"	5.9mm	B20	£8.00	
22.0mm	1/4"	6.0mm	B22	£8.00	
26.0mm	10.0mm	8.0mm	B26E	£12.00	
28.0mm	12.0mm	8.0mm	B28	£8.50	:
30.0mm	3/16"	5.0mm	B300A	£8.50	
30.0mm	1/4"	9/32"	B300	£8.00	
22.0mm	8.0mm	7.0mm	BB22	£8.00	
22.0mm	1/2"	6.0mm	B22C	£11.50	
7/8"	3/8"	9/32"	B78D	£7.50	
23.0mm	1/2"	5.0mm	B23C	£7.50	
24.0mm	1/2"	5.0mm	B24C	£7.50	
25.0mm	15.0mm	6.0mm	B25G	£10.75	:
25.4mm	15.0mm	5.5mm	B254G	£10.75	
1"	1/2"	4.0mm	B254C	£10.75	
28.0mm	8.0mm	8.9mm	BB28	£10.75	
28.0mm	1/2"	5.0mm	B28C	£11.50	
1-1/8"	1/2"	5/16"	B29C	£8.00	
32.0mm	12.0mm	10.0mm	B32	£8.00	
35.0mm	15.0mm	11.0mm	B35G	£10.75	
1-3/8"	1/2"	7/16"	B35C	£10.75	
38.1mm	15.0mm	8.5mm	B38G	£9.50	
41.0mm	8.0mm	10.6mm	BB41	£10.75	
43.0mm	8.0mm	9.6mm	BB43	£10.75	

Cutter	Replacement	Bearing	Collar Packs	Blade
Reference	Bearing	Fixing Packs	& Circlips	Fixing Screw
30/2 - 30/6	B127	-	COLL/14	-
34/90 - 34/92	B127,B16,B19	SP-E	•	-
40/13 - 40/16	B95A, B127A, B16A	SP-J	-	-
40/32	B127A	SP-S	-	-
45/1 - 45/3	B63B	SP-G	-	-
46/01	B127A	SP-S	•	SP-46/01D
46/010	B127A	SP-W	•	RT/M3.0
46/02 & 46/03	B19H	SP-46/02D	•	SP-46/02D
46/05 & 46/07	B63B	SP-G	•	-
46/06	B18	SP-A	-	-
46/09	B19C	-	COLL/12	-
46/2	B19	SP-E	-	-
46/23	B127A	SP-C	•	-
46/3 - 46/6C	B16	SP-A	-	-
46/6D	B127A	SP-C	-	-
46/7	B18	-	•	-
46/7/50	B127	SP-A	•	•
46/8/50	B95A	SP-C	-	-
46/10	B26E	-	COLL/38	-
46/11 - 46/18	B95A & B127A	SP-C	•	-
46/19	B19A	SP-C	•	-
46/20 46/21 & 46/22	B19	SP-E	-	-
	B18	SP-A	•	-
46/23	B127A	SP-C SP-C	-	-
46/29 - 46/33	B95A & B127A	SP-C SP-C	•	-
46/34	B127A & B19A		•	-
46/35	B127 & B19	SP-A SP-F	•	-
46/37	B95B	SP-F SP-C	•	
46/38 46/39 & 46/39L	B127A B95A, B127A,B16A & B19A	SP-C	•	
46/39 & 46/39L		SP-C SP-A	•	-
46/41	B127 & B16 B95A	SP-A SP-C	•	
46/42		SP-C		
46/43	B95A & B127A B127A	SP-C	•	-
46/44	B127A B22, B19 & B16	SP-C SP-E		
46/45 - 46/49	B127A	SP-C		-
46/50	B127 & B16	SP-A		
46/52	B127A & B16A	SP-C		
46/55	B127A	SP-C		
46/56	B16F	SP-D		-
46/57 & 46/58	B19	SP-E		-
46/60 - 46/66	B95A & B127A	SP-C		
46/67 & 46/68	B127A & B95A	SP-C		
46/70 & 46/71	B127A & B16A	SP-C		-
46/75	B95B & B127B	SP-F		-
46/80	B127A	SP-C		
46/82	B127A & B127A	-		-
46/85	B127A	SP-C		-
46/90	B16	-	COLL/14	-
46/91 & 46/910	B127	-	COLL/14	-
46/92	B16	-	COLL/14	-
46/93	B95A & B127A	SP-C		
46/94	B19C	-	COLL/12	
46/9/50 & 46/9/60	B127A	SP-C		-
46/95 & 46/96	B127	-	COLL/14	-
46/97 - 46/160	B95A & B127A	SP-C	•	-
46/101	B254G	-	COLL/12	-
46/100	B25G	-	-	-
46/103 - 107	B127	SP-A	-	-
46/125, 46/115				
46/130 - 160	B95A + B127A	SP-C	-	-
46/200 & 201	B19A	SP-T	-	-
46/210	B127A	SP-C	-	-
46/211	B182	SP-E	-	-
46/212	B19	SP-E	-	-
46/230 - 46/280	B95B & B127B	SP-F	-	-

. **Multi-bearing Packs**



Mixed Bearing Multi-Packs

Packs of popular bearings with same bore size, for use with router cutters. Three packs available with 1/8", 3/16" and 1/4" ID.

Rubber Shielded

Ball Bearings

Give an improved protection from dust and dirt.



Ì

Г itters Refs. BNT/2 & BNT/5 are tapered.

Description	ID	Product Ref.	Price
Comprises 1 off each:			
B95B, B127B, B16B & B19B	1/8"	B/PACK/1	£21.00

. . . .

Price

£28.50

£34.00

£28.50

£40.00

£21.50

£43.00

B63B/10

B95A/10

B127A/10

B19H/10

B19C/10

B16/10

oomprises i on each.			
B95B, B127B, B16B & B19B	1/8"	B/PACK/1	£21.00
B95A, B127A, B16A & B19A	3/16"	B/PACK/2	£13.50
B127, B16 & B19	1/4"	B/PACK/3	£8.50

0	כ	ID	Thickness	Product Ref.	Price
1/2	2"	3/16"	3/16"	B127ARS	£8.50
5/8	3"	1/4"	3/16"	B16RS	£4.75
3/4	l.	1/4"	9/32"	B19RS	£4.75
22.0	mm	8.0mm	7.0mm	BB22RS	£6.50
35.0	mm	15.0mm	11.0mm	B35GRS	£12.00

Deli	rin [®]	Bea	rings	
Delrin	l® slee	ved for	Corian®	cut



6.8mm

BNT/5

£6.50

21/22.4mm

1/4"

Contain the same size bearing for production applications. Reduced price for each individual bearing.



1-1/8"	1/2"	5/16"
32.0mm	12.0mm	10.0mm
35.0mm	15.0mm	11.0mm
1-3/8"	1/2"	7/16"
38.1mm	15.0mm	8.5mm
11.0	0.0	10.0

Cutter Reference	Replacement Bearing	Bearing Fixing Packs	Collar Packs & Circlips	Blade Fixing Screw
46/282 & 46/283	B127A & B16A	SP-C	-	-
46/290	B95A & B127A	SP-C	-	-
46/300 & 301	B19 & B19C	SP-E	COLL/12	-
46/360	B127A	SP-C	-	-
46/390	B127 & B127	SP-Q	-	-
46/401	B95A	SP-C	-	-
84/19 & 84/21	B16	SP-A	-	-
84/24	B127	SP-A		-
84/84	B16	-	-	-
90/1 - 90/4	B127A	SP-C	-	-
90/10 & 90/11	BN/1	SP-E	-	-
90/12	B16F	SP-D		-
90/13 & 90/14	B16	SP-A	-	-
	BN/3	-		-
90/20 & 90/21		-	COLL/12	
90/23 & 90/24	B29C		-	-
90/25 & 90/26	BN/4	SP-C	-	-
90/29	BNT/5	SP-E	-	-
90/30	B19	SP-E	-	-
90/31	B29C	-	COLL/12	-
90/40	B16F	SP-D	-	-
91/20	BB41 & BB43	-	-	-
92/1 - 92/6	B127A	SP-C	-	-
92/20 - 92/27	B16F	SP-D		-
93/3	B16F	SP-D	-	-
93/1	B16F	SP-C		
93/2 & 93/10	B127A	-		-
		SP-D	-	-
93/11	B16A	-	-	-
331	B22C	-	COLL/12	-
333	B28C	-	COLL/12	-
334	B29C & B35C	-	COLL/12	-
343 & 344	B29C	-	COLL/12	-
346 & 348	B32	-	-	-
753	BB16	-	-	-
865	B127A	SP-C	-	-
C040	B127A	SP-I	-	-
C049	B95B	SP-C		-
C059	B95B	SP-F		-
C060	B95B	SP-H		-
C061	B95B	SP-F		-
C062 - C063	B95B	SP-H		
0002 - 0003		SP-C		
C065 - C066	B127A	SP-C SP-I	-	-
C074 - C079	B95A & B127A		-	-
C086	B95A	SP-H	-	-
C087	B95B	SP-H	-	-
C090	B95B	SP-F	-	-
C091	B95A	SP-C	-	-
C094	B95A & B127A	SP-I	-	-
C095	B95A & B127A	SP-C	-	-
C096	B127A	SP-I	-	-
C097	B95A	SP-I		-
C098 - C099	B95A & B127A	SP-I	-	-
C104	B95A	SP-I		-
C105	B95A	SP-C		-
C111	BB22	-	CIRC/1	
C112 & C115	B95A	SP-I	-	-
	B127A	SP-I		
C116		SP-I SP-D	-	-
C117	B16		-	-
C119	B127A	SP-C	-	-
C121	B127	-	COLL/14	-
C121A	BB16	-	COLL/8	-
C122	B127A	SP-I	-	-
C123	B19	-	COLL/14	-
C130	B16	SP-I	-	-
C131	BB22	-	CIRC/1	-
C133	B19	SP-C	-	-
C134	B127A	SP-C	-	
		0. 0		

Bearing Fixing Packs

Spare part packs make ordering spares easier. Packs include, hex key (if required), screw, washer and shield (if required). See chart above for selection of correct pack and replacement bearing.



Кеу Туре	Size A/F	Cap Head Screw	Washer ID	Shield OD x ID	Product Ref.	Price per Pack
Hex	3mm	M4 x 6mm	4.0mm	-	SP-A	£1.50
Hex	3mm	M4 x 6mm	4.0mm	5/8" x 1/4"	SP-B	£1.50
Hex	3/32"	NC5 x 3/8"	3.5mm	$\left\{ \begin{array}{c} 1/2" x 3/16" \\ 5/16" x 3/16" \end{array} \right\}$	SP-C	£2.00
Hex	3/32"	NC5 x 3/8"	3.5mm	16mm x 5mm	SP-D	£1.50
Hex	4mm	NF10 x 1/2"	5.0mm	-	SP-E	£1.50
Hex	5/64"	NC3 x 3/8"	2.0mm	3/8" x 1/8"	SP-F	£1.50
-	-	NC2 x 7/32" (Pozi®)	2.0mm	-	SP-G	£1.00
Hex	{ 2.5mm 3/32"	{ 1/8"w x 3/8" } M3 x 8mm }	3.5mm	-	SP-H	£1.50
Hex	{ 2.5mm 3/32"	<pre>{ M3 x 8mm NC5 x 3/8" }</pre>	3.5mm }	1/2" x 3/16"	SP-I	£2.00
Hex	2.5mm	M3 x 8mm	5.0mm	1/2" x 3/16"	SP-J	£1.50
Hex	3/32"	NC5 x 1/2"	3.5mm	-	SP-Q	£2.00
Hex	5/64"	M2 x 6mm	2.0mm	-	SP-R	£2.00
Hex	2.5mm	M3 x 6mm	3.5mm	-	SP-S	£1.25
Hex	5/64"	M3 x 12mm (csk)		-	SP-T	£1.25
Hex	5/64"	NC5 x 9mm (csk)	-	1/2" - 3/16"	SP-W	£7.50

Cutter	Replacement	Permine	Collar Packs	Blade
Reference	Bearing	Bearing Fixing Packs	& Circlips	Fixing Screw
C138 - C139	B95A	SP-C	a on cops	Tixing Screw
C140	B127A	SP-I	-	
C143 - C148	B127A	SP-I	-	-
C149	BB22	-	-	-
C156 - C158	BB22	-	-	-
C152	B127A, B16A & B19A	SP-J	-	-
C155	BB22	-	-	-
C162 - C162A	B127	-	COLL/14	-
C165 - C166	B19C	-	COLL/12	-
C167 - C168	B63B	SP-R	-	-
C170	B127A	SP-I	-	-
C183 - C184	B127A	SP-I	-	-
C190 - C191	B127A	SP-I	-	-
C193	B95A & B127A	SP-I	-	-
C195 - C197	B127A	SP-I	-	-
C198	B95A & B127A	SP-I	-	-
C199	B19 & B19C	SP-C	COLL/12	-
C201 & C203	B35G	-	CIRC/2	-
C204	BB22	-	-	-
C205	B127A	SP-I	-	-
C206	B22C	-	COLL/12	-
C207	B29C	-	COLL/12	-
C208 & C221	B32	-	-	-
C209 & C220	B16	-	-	-
C210 - C213	B22C	-	COLL/12	-
C215	B127A	SP-I	-	-
C216	B16F	SP-I	-	-
C217	B127A	SP-I	-	-
RT/03	-	-	-	RT/M3.0
RT/04 - RT/08, RT/10,				
11(M),12(M), RT/13 -				DT/0 F
RT/15, RT/19, RT/21	-	-	-	RT/3.5
RT/23 - RT/24	D. LOT			00 40/000
RT/33, RT/39	B127	-	-	SP-46/02D
RT/30 - RT/32	B16	-	-	SP-46/02D
RT/40 & RT/41	-	-	-	*RT/3.5 &
BT/50 DT/54 0 BT/00				SP-46/02D
RT/50, RT/51 & RT/60 RT/65	- D1074	- SP-W	-	SP-46/02D
	B127A	SP-W	-	RT/M3.0
RT/70 RT/80	B19C	-	-	RT/3.5
RT/81	-	-	-	RT/3.5A RT/M3.0
RT/100	- B127	-	-	RT/M3.0
RT/130, 260	B127 B127A	-	-	RT/M3.0
RT/323	DIZIA	-	-	RT/3.0
RT/331	- B127A	SP-W	-	RT/M3.0
RT/391	B95A	SP-W	-	-
S49/10	B127 & B127	-	COLL/14	
SSP/1-2B, 4 - 9B	B95A & B127	SP-C	COLL/14 COLL/14	-
SSP/3-3B	B95B & B127	SP-F	COLL/14 COLL/14	
T46/0 & T46/02	B95A	SP-C	-	-
T46/01	B127A	SP-C	-	-
T46/04	B127A	SP-C	-	-
T46/1	B16	SP-E	-	-
TR23 & TR24	B63B	SP-S	-	-
TR25	B95A	SP-S	-	-
TR26 - TR28	B127A	SP-S	-	-
TR29	B127	-	COLL/14	-
TR29A	BB16	-	COLL/8	-
TR30	B19C	-	COLL/12	-
TR31 - TR33	B95A	SP-S	-	-
TR34	B95A, B127A, B16A, B19A	SP-S	-	-
TR35	B127A, B16A, B19A	SP-S	-	-
TR38	BB16	-	COLL/8	-
TR39	BB19C	-	COLL/12	-
TR41 & TR42	B32	-	-	-
			RT/3.5 for RB/D, S	P-4602D for RB/C

Collar Packs

Collar

OD

11.0mm

14.0mm

15.8mm

15.0mm

18.0mm

20.0mm

Collar Packs are used for cutters with shank mounted bearings. Packs include one collar, grub screw and hex key.

Hex

Key

1/16"

5/64

1/16

1/16"

1/16"

1/16"

Collar

ID

1/4"

8.0mm

3/8'

3/8'

1/2'

1/2'



Price

per Pack

£1.50

£1.50 £1.50

£1.50

£1.50

£1.50

Screw

Size

M3 x 4mm

dome 7mmØ

M3 x 4mm, dome 5.5mmØ

M3.5 x 5mm.

6mmØ

M3.5 x 5.5mm dome 6mmØ

M4 x 5.5mm

dome 6mmØ

M3 x 5mm

Key

Required

Torx[®] T9

Torx® T15

Torx[®] T15

Torx

T15

Hex 1.5mm

Hex 5/64" NPRT/M3.0

Product Ref.

COLL/14

COLL/8

COLL/38

COLL/38/

COLL/12

COLL/12A

. . . .

Screw

Туре

Socket

Torx

Torx[®]

Torx

Torx®

Set



Sprung steel fasteners to

hold bearings in position

onto grooved shanks.

Circlips

Collar ID	Product Ref.	Price per Pack
8.0mm	CIRC/1	£1.00
1/2"	CIRC/2	£1.00

.

Screw

Product Ref.

RT/3.0

RT/3.5

RT/3.5A

SP-46/02D

SP-46/01D £1.00

.

Price

£2.25

£2.25

£2.25

£2.25

£1.50

Blade Fixing Screws for Rota-tip™

Always use our replacement screws if those supplied with the tool are lost or need replacement.



Keys

Gives positive and quick action to help prevent overtightening and to allow quick tightening of screw.



Кеу Туре	Key Size	Product Ref.	Price
Hex	1.5mm	RT/KEY/1.5	£5.00
Hex	5/64"	N AK/564	£1.75
Torx®	T9	N RT/KEY/T9	£4.00
Torx®	T15	BT/KEY	£4 00

.



ROUTER CUTTER SPARE PARTS Æ

SAFETY INFORMATION & CUTTER CARE

Before use to ensure safe working & to get the best from your Trend cutters, read the following safety instructions & cutter care.

Power Tool Safety

- Ensure the power tool is in compliance with 98/37/EC (identified by the CE marking on the power tool).
 - Read and understand instructions supplied with power tool, attachment and cutter.
- Always remove the plug from the socket before making any adjustments to the machine.
- Disconnect power tool and attachment from power supply when not in use, before servicing, when making adjustments and when changing accessories such as cutters. Ensure switch is in "off" position and cutter has stopped rotating.
- Do not wear loose clothing. Make sure baggy sleeves are rolled up and ties are removed. Ensure long hair is tied back.
- Always trail the cable away from the working area.
- Always keep the area around the work piece and the floor clear of obstacles.
- The level of noise when routing may exceed 85 dB(A) and ear defenders should be worn.
- Always wear eye protection in the form of goggles, safety spectacles or a visor.
- Always wear a respirator or dust protection mask. Dust masks/filters should be changed regularly. Fit dust extraction
- All Personal Protective Equipment (PPE) must meet current UK and EU legislation.
- Trial cuts should be made on waste material before starting any project.
- Always clamp securely the material being machined.
- Never leave the power tool unattended when it is
- runnina. Always wait until the spindle stops rotating before making any adjustments.
- Periodically check all nuts and bolts to make sure they are tight and secure.
- Always keep guards in place and in good working order.
- Only use cutting tools for woodworking that meet EN847-1/2 safety standards and any subsequent amendments
- Hand held power tools produce different vibration levels. Always refer to the specifications and relevant Health and Safety Guide.

Routing Safety

- Disconnect machine from power source before carrying out any adjustments.
- Before each use check that the cutting tool is sharp and free from damage. Do not use the cutting tool if it is dull, broken or cracked or if any other damage is noticeable or suspected.
- Keep hands, hair and clothing clear of the cutter.
- Clamping surfaces shall be cleaned to remove dirt, grease, oil and water.
- Tool's shank must be inserted into the router's collet at least all the way to the marked point.
- Tools and tools bodies shall be clamped in such a way that they shall not become loose during operation.
- Care shall be taken when mounting tools to ensure that
- the clamping is by the shank of the tool and that the cutting edges are not in contact with each other or with

the clamping elements

- Fastening screws and nuts shall be tightened using the appropriate spanners etc., and to the torque value provided by the manufacturer.
- Extension of the spanner or tightening using hammer blows shall not be permitted.
- Clamping screws shall be tightened according to instructions provided by the manufacturer. Where instructions are not provided, clamping screws shall be tightened in sequence from the centre outwards.
- Cutting tools are sharp. Care should be taken when handling them.
- Check that the cutter is fitted securely in the router collet
- Always remove spanners and hex keys from the cutter.
- Check before starting to cut, that there are no obstructions in the path of the router. When cutting through the full thickness of the material, ensure there are no obstacles beneath the work piece.
- The direction of routing must always be opposite to the cutters direction of rotation. Do not back-cut or climbcut
- Do not switch on the router with the cutter in contact with the work piece and do not feed the cutter into the work piece until it is at full speed.
- Always guide the router with both hands
- When you are finished routing, release the plunge and allow the machine to come to a complete stop.
- Ensure the shank size is compatible with the collet.
- Ensure the cutter can be used safely with the chosen router before use
- When using stacked tooling (multi-blade, block, groover etc.) on a spindle arbor, ensure that the cutting edges are staggered to each other to reduce the cutting impact.
- Feed the router at a constant speed. Too slow a feed speed will result in burning the material and overheating the cutter.
- Never use cutters with a diameter exceeding the maximum diameter indicated in the technical data of the powertool or attachment used.
- Do not take heavy and deep cuts in one pass as this will overload the router
- The motor of a router is susceptible to the accumulation of sawdust and wood chips and should be blown out, or 'vacuumed', frequently to prevent interference with normal motor ventilation.
- In case of excessive vibrations while using the router stop immediately the operation and have the eccentricity of the router cutter and clamping system checked by competent personnel.

Maximum Speed (n.Max)

The maximum speed marked on the tool, or shown in the chart or on the packaging should not be exceeded. Where stated, the speed range should be adhered to. Recommended speeds are shown in our Routing Catalogue, in our instructions and/or on our website.

Using Routers in a Fixed Position

After work, release the router plunge to protect the cutter

- Always use a push-stick or push-block for last 300mm of the cut. Whenever possible use a work holding device or jig to
- secure component being machined. Ensure attachment is securely fitted to the workbench,
- with table surface at approximately hip height. Use a No-Volt Release Switch. Ensure it is fixed securely, easily accessible and is used correctly.
- Do not use awkward or uncomfortable hand positions.
- The use of a fine height adjuster is highly recommended (if available for your router) for accurately adjusting the height of the cutter for operations such as dovetailing, or in a fixed head use.
- Do not reach underneath the table or put your hands or fingers at any time in the cutting path while tool is connected to a power supply.

Cutter Care

- Always read the instructions supplied with the router cutter.
- Do not drop cutters or knock them against hard objects.
- Cutter shanks should be inserted into the collet at least 2/3 of shank length. Do not insert shank too far into the collet. Leave about 3mm of shank showing.
- Do not over-tighten the collet nut as this will score the shank and create a weakness. If the shank is marked please discard the cutter.
- Periodically check the router collet and collet nut for wear. A worn distorted collet should be discarded.
- Cutters should be kept sharp to avoid burning and to maintain a good finish on the work piece. Do not use blunt cutters.
- Cutters should be kept clean. Resin build-up should be removed at regular intervals with Resin Cleaner™. The use of a lubricant such as Trendicote™ PTFE spray will help prevent resin build-up.
- Do not take deep cuts in one pass, take several shallow passes to reduce the side load applied to the cutter.
- Very small diameter cutters should be handled and used with care
- Always return the cutter to its packaging after use.
- Always use router cutters in a router. Bouter cutters must not be used in a drill. Drill and boring bits must not be used in a router. Router cutters must only be used for the material cutting application for which they are designed. Do not use on metal or masonry.

Repair of Tools/Maintenance

- Repair of tools is only allowed in accordance with the manufacturers instructions.
- The design of composite (tipped) tools shall not be changed in the process of repair. Composite tools shall be repaired by a competent person, ie. a person of training and experience, who has knowledge of the design requirements and understands the levels of safety to be achieved.
- Repair shall therefore include e.g. the use of spare parts which are in accordance with the specification of the original parts provided by the manufacturer.
- Tolerances which ensure correct clamping shall be maintained.
- Care shall be taken that regrinding of the cutting edge will not cause weakening of the body and the connection of the cutting edge to the body.

SPECIAL CUTTERS

Router cutters can be made to customer's specific requirements. Please provide exact dimensions or a wood profile, shank size, material grade (e.g. TCT or PCD), flute form, number of tips, rotation and material to be cut to enable us to provide a quotation. Please contact Trend Technical Support for further information

RE-SHARPENING

Cutting tools can be honed on a diamond stone or sent away for professional re-sharpening. Router cutters and sawblades can be honed on Diamond Whetstones. Please see pages 192-193 of catalogue.

Trend or certain Trend agents can offer a re-sharpening service. For further information on Trend's re-sharpening service please contact Trend Technical Support.

> For more safety information Visit:


www.trend-uk.com/safety

mm













POWER TOOLS & SAFETY

NEW

850 WATT

VARIABLE

ROUTER

trend

SPEED

trend

We offer power tools with high performance, flexibility and a comprehensive range of spares and accessories for all woodworking trades.

T11&T10 **ROUTER & ACCESSORIES**







LAMINATE TRIMMER

T20K BISCUIT



NEW IMPROVED Excellent protection from inhaling harmful dust...





This logo identifies products that conform to the standard pattern of fixings for guide bushes and securing the router base to a table or jig. For more information Visit:

www.trend-uk.com/tbc

AIRSHIELD







To suit CGS clamp guides.

104 trend



All prices are exclusive of VAT

£20.00

Woodworker

2000 WATT VARIABLE SPEED RADESMAN ROUTER

(F

- Electronic full wave variable control of spindle speed under load for a fine finish on all types of material.
- Soft start eliminates sudden movement of machine on start up.
- Two column precision base with large phosphor bronze bushes for plunging accuracy.
- Spindle lock and hex collet nut results in easy cutter changes with the 22mm spanner supplied.
- Adjustable twin rod parallel side-fence guide with integral micro-adjuster for straight edge work.
- Precision machined one-piece multi-slit collet for fail-safe grip of cutter shank.
- 3-position revolving depth stop for fast adjustable settings.
- Adjustable inner plate for guide bush accuracy.

T10EK OR **T10ELK** (115v) £310.00

Includes: 1 x 1/2" Collet

- **1 x** 35mmØ Bolt on Dust Spout
- 1 x 30mm Guide Bush (with inner plate & line-up pin)
- 1 x Side-fence with Micro Adjuster
- **1 x** Storage Case

Specification:

-	
Rating	Professional/Trade
Plunge stroke	0-80mm
Power input	2000w
Standard collet dia.	
No load speeds	8-20000 rpm
Dust spout size	35mm
Guide bush dia. supplied	
Cutter dia. max.	50mm
Other collet dia6mm, 1/4", 8mm	n, 3/8",10mm & 12mm
Weight	6.3kg
Voltages	
*All 115v routers over 1850W require a Minimum generator or transformer rec continuous with a 32A BS4343 115v s	uirement 3 kVA
115v units cannot be used on the no- CRT/L and PRT/L router tables.	volt release switch

Guide Rushes

Guide bushes to fit the adjustable	
inner plate on the base of router. See	ą
page 143 for further information.	6

(and

GB/T10/30 30mm GB/T10/40

40mm

Product Ref.	OD	Price
GB10	10mm	£6.50
GB12	12mm	£6.50
GB14	14mm	£6.50
GB16	16mm	£6.50
GB18	18mm	£6.50
GB20	20mm	£6.50
GB22	22mm	£6.50
GB24	24mm	£6.50
GB26	26mm	£6.50
GB28	28mm	£6.50
GB30	30mm	£6.50
GB32	32mm	£6.50
GB40	40mm	£6.50

Ideal for use by the tradesman in the workshop or on site.

Sta	andard Guide Bush fitting Inner Plate centring for accuracy
100% accurate. I routing kitchen w	
T10 Accessorie Fine Height Adjuster Fits in place of the knurled kn and provides fine height adjustment of the cutter in a table or with a dovetail jig.	
FHA/003	£20.50
Extra Side-fence WP-T10/087	£55.00
Direct Fit Guide Bushes These guide bushes can be us fit to the router for general wor absolute accuracy is not the m	sed as a direct rk where
Product Ref. OD	Price

Adjustable Inner Plate

T10 & T11 Replacement Parts:

trend

These routers are supported by our network of repair agents around the UK. A complete range of spares are available. We have listed below some of the common spares usually requested for routing machines.

9	Collet Nut CLT/NUT/T10	£8.00
C	Brush Set (pair)	
	WP-T10E/004 (230v)	
	WP-T10EL/004 (115v)	£13.00
R	Spring for Thumb Knob	
8	WP-T10/081	
30	Thumb Knob M6x15mn	-
P	WP-T10/085	£1.75
	Inner Plate	
	WP-T10/075 (T10)	£5.00
~	WP-T9/075 (T11)	
	Switch Unit	
		() CO1 OO
	WP-T10E/003 (115v & 23	0V) £31.00
	Guide Bush Screw M5	r8mm
	WP-SCW/09 (each)	
		20100
- K T	Inner Plate Screw M5x	12mm
<i>A</i> 0	WP-SCW/42 (each)	£0.50
	Handles	
	WP-T10/041 (left)	£7.00
	WP-T10/049 (right)	£7.00
-	Plastic Slider Base	
	WP-T10/080 (T10)	£14.50
	WP-T11/080 (T11)	
_ (194	T11 Fine Height Adjust	er Handle
	WP-T11/128	£11.00

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads

£14.00

£14.00

W WOODWORKING

EST ON TEST

ന്നമ

Best on test

5 850 WATT VARIABLE SPEED ROUTER

Still popular by design, this router is both compact & powerful and suitable for light & medium duty applications.

- Electronic variable control of spindle speed under load for a fine finish on all types of material.
- Soft-start feature eliminates sudden movement of machine on start-up.
- Spindle lock & hex collet nut allows easy cutter changes.

F

- Precision machined one piece multi-slit collet with combined nut.
- Compact design & low weight make it easy to use especially for intricate work.
- Adjustable twin rod side-fence for guiding along a straight edge.

trend **Basic Models T5EB** (240V) **£194.00 T5ELB** (115V) £214.00 **Basic Model Includes:** 1 x 1/4" Collet **1 x** 35mm Clip-in Dust Spout 1 x 20mm Guide Bush 1 x Side-fence With Micro Adjuster **1 x** Beam Trammel Attachment **Models with Storage Case T5EK** (240V) **£254.00 T5ELK** (115V) *£*274.00 See opposite page for specification. **Models with Storage Case** Include: 1 x 1/4" Collet 1 x 8mm Collet & Nut Set 1 x 35mm Clip-in Dust Spout 1 x 20mm Guide Bush 1 x Side-fence With Micro Adjuster 1 x Beam Trammel Attachment **1 x** Fine Height Adjuster

T5 Replacement Parts:

The T5 router is supported by our network of repair agents around the UK. A complete range of spares are available. We have listed below some of the common spares usually requested for routing machines.

	Brush Set (pair) WP-T5E/032 (240v) £7.00		Plunge Knob Handle WP-T5/015	£4.(
	WP-15EL/032 (2400)£7.00 WP-T5EL/032 (115v)£7.00	9	Fixed Knob Handle WP-T5/076	£3.7
	Spring for Thumb Knob WP-T5/016£1.00	1-1.	Guide Bush Screw M52 WP-SCW/13 (each)	x10mm
2 M	, Thumb Knob M6x12mm WP-T5/011£1.50		Plastic Slider Base	
	Depth Stop WP-T5/014£2.50		WP-T5/050	£5.2
	Switch WP-T5E/027 (240v)£7.00	100	Beam Trammel Attachn For 8mm dia. fence rods.	
	WP-T5EL/027 (115v) _£12.00		BEAM/005	£6.0

Collet & Nut Sets (New Style post 2005)

Precision multi-slit one-piece collet with combined nut sets in three sizes.

Product Ref.	ID		Price
CNS/T5/6	6mm		£14.00
CNS/T5/635	1/4"		£14.00
CNS/T5/8	8mm	5.0	£14.00
Collets (O	ld Style pre 20	05)	
For use with	old style collet nut.		
Product Ref.	ID	alb_	Price
CLT/T5/32	1/8"	H	£29.25

Collet Nut (Old Style pre 2005)	
For use with old style collets.	
Product Ref.	Price
CLT/NUT/T5	£3.25



£4.00

£3.75

£0.50

£5.25

£6.00

T5 MK2 850 WATT VARIABLE SPEED ROUTER

Safety switch version of T5 with same features as T5 opposite. A trigger lock is included when used in a router table.

T5EK/MK2 £254.00



- 1 x 20mm Guide Bush
- **1 x** Side-fence With Micro Adjuster
- **Beam Trammel Attachment** 1 x
- **Trigger Lock 1** x
- **1 x** Fine Height Adjuster
- Storage Case 1 x



Specification:

Rating	Professional/Trade
Plunge stroke	0-50mm
Power input	850w
Standard model collet dia.	1/4" & 8mm
Cutter dia. max	40mm
No load speeds 240v	9-27000 rpm
No load speeds 115v	8.5-26000 rpm
Dust spout size	35mm
Guide bush dia.	20mm
Weight	3.0kg
Voltages	115v or 240v
(T5EK/MK2 is not available in 115	
Minimum generator or transforme	r requirement 0 7Ek//A

Minimum generator or transformer requirement 2.75kVA continuous



Fine Height Adjuster

CASE/T5

Fits in place of the depth stop and threads onto the longest revolving turret screw. It enables fine vertical adjustment of the cutter. Recommended when using the T5 & T5 MK2 with our Router Tables or Dovetail Jigs.

FHA/001	£12.00
Beam Trammel	
BEAM/001	£14.00
8mm x 500mm rod	
Storage Case as supplied with 'K' & MK2 models of the T5. See page 146 for full details	trond





WP-T5/046 £26.00 Side-fence without Micro Adjustment

WP-T5/077_ £17.00

Standard Fence Rods 300mm ROD/8X300 (pair) £10.00

Extra long Fence Rods 500mm ROD/8X500 (pair) _ £16.00

T5 MK2 Trigger Lock To lock trigger in 'on' position when used in table mode with a No-Volt Release Switch fitted. (see page 144 for No-Volt Release Switch)

T5MK2/LOCK

will switch machine off automatically.

Ergonomic switch lever, when released

Guide Bushes

trei



Alternative sizes of guide bushes to fit base of router. See page 143 for further information.

Product Ref.	OD	Price
GB10	10mm	£6.50
GB12	12mm	£6.50
GB14	14mm	£6.50
GB16	16mm	£6.50
GB18	18mm	£6.50
GB20	20mm	£6.50
GB22	22mm	£6.50
GB24	24mm	£6.50
GB26	26mm	£6.50
GB28	28mm	£6.50
GB30	30mm	£6.50
GB32	32mm	£6.50
GB40 Extra large size	40mm	£6.50

G

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads

£34.00

All prices are exclusive of VAT

£3.50





108 **trend**

All prices are exclusive of VAT

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads





M6 tapped holes in base for fixing jigs & removable phenolic base slider.







Specification:

Rating	Professional/Trade
Plunge stroke	0-40mm
Power input	450w
Standard collet dia.	1/4"
No load speed	
Guide bush dia.	18mm
Weight	
Dust spout	29mm
Voltage	230v

 (\mathbf{F}) ND BASE



Open Horse Shoe Base Ensures stability and flush surface trimming applications.

Copy Follower For unguided router cutters.



Copy Following




Bearing Guided Trimming



Flush Trimming

Template Following

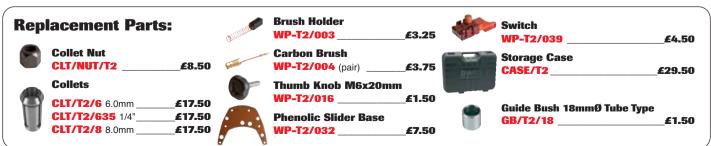

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads

All prices are exclusive of VAT

POWER TOOLS & SAFETY

T20K PROFESSIONAL BISCUIT JOINTER

Biscuit jointing machine with 0-90° tilt base for slotting grooves in boards and timbers to accept flat biscuit dowels.





T20K £189.00



Edge Joints



Bevel Joints



T-joints



- Six pre-set depth adjustment.
- Adjustable top handle.

(6

- Precise adjustable rise and fall with measurement scales.
- Spindle lock for easy tool change.
- Quiet gear arrangement.
- Smaller more ergonomic body design.



Specification:

-	
Rating	_Professional/Trade
Power input	710w
Rotation speed	9000 rpm
Weight	
Plunge depth max.	20mm
Plate height adjustm	ent45mm
Dust spout size	28mm
Tilt base	0-90°
Blade	
Voltage	230v

Minimum generator or transformer requirement 2.75kVA continuous.

Optional Accessories:	
No.0	No.20
For board thickness 8 - 12mm	For board thickness 19mm+
Size: 47.5 x 15.5 x 4.0mm	Size: 60 x 23 x 4.0mm
BSC/0/100 (qty. 100)£4.75	BSC/20/100 (qty. 100)£5.25
BSC/0/1000 (qty. 1000)£22.00	BSC/20/1000 (qty. 1000) _£24.00

No.0, 10 & 20 Qty No.0 x 30, No.10 x 30 & No.20 x 40

BSC/MIX/100 (qty. 100) ____£5.25 Qty No.0 x 250, No.10 x 250 & No.20 x 500

BSC/MIX/1000 (qty. 1000) £23.00

100MM BISCUIT JOINTING BLADES

£4.75

- Six Tungsten Carbide Teeth.
- Anti-kickback tool design for safer use.
- Suitable for natural timbers, particle and MDF boards.
- Standard 100mm diameter x 22mm bore x 4mm kerf.

Waveform

Includes:

1 x

1 x

1 x

No.10

Six Wing TCT Blade **Dust Bag**

28mm Dust Spout

For board thickness 13 - 18mm

BSC/10/1000 (qty. 1000) £23.00

Size: 53 x 19 x 4.0mm

BSC/10/100 (qty. 100)

Storage Case

BJB/100S £41.50 Bossed body with scriber tooth.



Craft Pro

CR/BJB100T

£21.50 Thin body for Trend, Freud & Casals.

CR/BJB100 £21.50 Bossed body

110 trend

All prices are exclusive of VAT

To download Videos, Test Reviews, Spare Parts & Instruction Manuals Visit: www.trend-uk.com/downloads

WET & DRY ГЗ **VACUUM EXTRACTOR**

A powerful wet and dry autostart extractor with many useful features.

- Powerful but guiet 1200 watt bypass motor. Power tool take off with auto start feature and 6 second run-on delay.
- Large 34 litre capacity impact resistant plastic container with five castors for stability.
- Extra long 7.8 metre power cable.
- Extra long five metre hose.



Max. Power Tool Autos

Included with T30

0.3 micron Micro (increased effective dust particles (HEPA).

T30/5 £21.00 (Round mesh, white inside)

Nylon Wet and Dry Pre-Filter for use with 0.3 micron Cartridge Filter. Prolongs life of Cartridge Filter and increases effectiveness.

T30/3 🔄 £23.00

Included with T30A only

Standard 12 micron Cartridge Filter T30/6 £14.00 (Diamond mesh, yellow inside)

HOSES &	Hose Cuff To join hoses together which have the same diameter.
CONNECTIONS	HOSE/CUFF/38£
	Joins 38mm OD hoses together
Hoses	HOSE/CUFF/56£
In 3 metre lengths. Four sizes of hose are offered	Joins 56mm OD hoses together
to fit a multitude of	Plastic Bayonets
extraction equipment.	Designed to fit hoses to extraction fi
Bayonets may be required.	HOSE/BAY/35
	OD 35mm, ID 27mm
HOSE/35X3 £15.50	HOSE/BAY/42£1
OD 35mm, ID 30mm	OD 42mm, ID 36mm
H0SE/38X3 £24.50	HOSE/BAY/56£1
OD 38mm, ID 32mm	OD 56mm, ID 50mm
H0SE/56X3 £34.00	Stepped Bayonet
OD 56mm, ID 50mm	Ideal when a custom connection is
HOSE/105X3 £46.00	required. Can be cut to size with a
OD 105mm, ID 100mm	HOSE/BAY/STEP£
	OD 54mm/39mm, ID 48mm/33mm

To join hoses together which have the same diameter.
HOSE/CUFF/38£7.00
Joins 38mm OD hoses together
HOSE/CUFF/56€8.50
Joins 56mm OD hoses together
Plastic Bayonets
Designed to fit hoses to extraction fittings.
HOSE/BAY/35£9.00
OD 35mm, ID 27mm
HOSE/BAY/42£10.00
OD 42mm, ID 36mm

Can be cut to size with a knife.

start 1000W	
AF only	
Cartridge Filter for	
eness against fine	



- **1 x** Floor Cleaning Kit
- 1 x Crevice Tool **1 x** Upholstery Tool
- **Power Tool Adapter** 1 x

Specification:

Rating	Professional/Trade
Power input	1200w
Autostart max. (230v)	2000w
Autostart max. (110v)	1000w
Autostart min.	40w
Airflow	3,300 L/min
Vacuum max.	2300mm H ₂ 0
Noise	72 dB
Hose	5M x 36mm OD
Container volume (dry)	34L
Container volume (wet)	25L
Dimensions	620 x 400 x 400mm
Weight	
Voltage	230v & 110v

Optiona	al Accessories:	
	Cloth Pre-filter	
	T30/2	£20.00
	For dry use, to prolong life increase effectiveness of 12 cartridge filter.	
	No Foam Filter	
	T30/4	£2.50
	prevents foam entering mot	
	Furniture Brush	
6	T30/20	£3.50
	Hasa Adaptar	
	Hose Adaptor T30/21	£3.50
119	Joint 58mm to 36mm. For u	
	T30/22 hose.	50 111
	Large Diameter Hose	
	T30/22	£18.50
9	58mm x 1.5 metre increases with Trend router tables & si smaller planer thicknessers a spindle moulders.	s suction uitable for
Long La	Paper Filter Bag	
1.	T30/15 (pack of 5)	£16.50
STREET, ST	T30/10 (pack of 10)	£32.00

Replacement Parts:

Stepped Power Tool Adapter WP-T30/056 OD 40mm/35mm/32mm/27mm	£3.00
Hose WP-T30/050 (36mm x 5 metre)	_ £26.00
Crevice Tool WP-T30/058	_£3.00
Upholstery Tool WP-T30/057	£3.00
Tube WP-T30/051 (1 off)	£4.00
Universal Spout WP-T30/052	£4.00
Universal Brush for Carpets WP-T30/053	£3.00
Universal Brush for Floors WP-T30/054	£3.50
Universal Brush for Fluids WP-T30/055	£3.50



To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads

Standard Accessories:

A hose 5M x 36mmØ. When used with CRT &

Upholstery

Tool

Paper Filter Bag for dry use only.

Floor Kit with tubes &

Crevice Tool

Power Tool Adaptor

adapters for floors,

carpets & fluids.

£3.50

Included with T30A and T30AF

SRT a Ref. CRT/3 is required.

T30/1

CE

£11.00

£9.50



AIRSHIELD PRO

New fully protected powered respirator for use with woodworking applications. Suitable for use when machining MDF.

- A built-in quiet fan keeps a constant flow of filtered air across the face.
- Provides excellent protection from inhalation of harmful dust with twin fine dust filters.
- Protects eyes and face against flying debris.
- Filter efficiency now 98%.
- Combination face-seal and hood improves protection.
- 8 hour battery.
- On board battery charging.
- Approved to new Standard BS EN 12941.

Brow Guard

Swings open and can be removed for easy access to filter, fan and battery

Strategic Component Distribution

Ensures optimum centre of gravity is achieved for balance and comfort.

AIR/PRO £219.00



Combination Face Seal & Hood Improves protection while keeping hair dust free.










and a second and a second and a second

AIRSHIELD

Polycarbonate visor to BS EN 166 low energy impact.



ACCESSORIES **Clip-on Passive Ear** Defenders AIR/P/6

Comfortable & lightweight with durable ball joint design for airing & rest positions. Weight 173g, cushion pressure 2.6kPA. SNR-26 (standard noise reduction). CE EN 352-3 £27.00

Accessory Visor Wipes AIR/WIPE (contains 100 wipes)__£16.00 IRRITANT (Xi), HIGHLY FLAMMABLE (F)



Twin Filter Efficiency is 98% with a minimum laboratory protection factor of 50. More than double Airshield Mk1.

Replacement **Parts:**

THP2 Filter Pack AIR/P/1 (pair) £21.50

Replacement Visor Overlay - Clear (pack of ten) AIR/P/3C ____£16.00



Specification:

trend

Motor

Positioned away from the

sensitive area of the

forehead to reduce noise

and irritation.

Rating .	DIY/Crafts	man/Professional
Airflow m	1in	160 l/min
Airflow fu	ully charged	200/1/min
Size of h	eadband	52cm-62cm
Motor so	und level	70 dB
Battery .		8 hrs
Weight		995g
Voltage		230v
	Eye protection	n to BS EN 166
	(low energy in	npact).

Respiratory protection (NPF50) to BS EN 12941 THP2.

Audible Low Battery Warning



Routing

Accessory Attachment For ear defenders

Replaceable Visor Visor easy to fit BSEN166.



8 Hour Battery Single rechargeable Ni-MH battery for 8 hours use. Battery needs to be charged whilst fitted to the unit.



8 Hour Battery £34.50 AIR/P/4

Charger (UK) AIR/P/5/UK (230v) £29.00

Dust mask with replaceable filter system for use when routing, for industrial and construction work, DIY and various other trades.

- Five times larger surface area than the average disposable dust mask, giving superior protection against dust inhalation and offering considerable cost savings.
- The one way exhaust valve vents to the underneath, preventing exhaled air from fogging goggles or the optional visor. This also ensures that the filter stays dry reducing filter clogging and prolonging its life.
- P2 electrostatic filters offer approximately ten times the life of a disposable facemask. Protects the user against hazardous toxic dust particles, metal fumes and mist to classification P2 and down to 0.3 microns enabling use with MDF.

Includes:

2 x P2 Electrostatic Filters

Replacement P	arts:
Spare P2 Filter	
ACE/1 (1 off)	£3.00
Spare P2 Filter	
ACE/15 (5 off)	£14.00

Specification:

Weight _____ Respiratory protection to BS EN143 P2



BS EN 140 BS EN 143 P2

CE



One wav

exhaust

valve.

Adjustable Strap

> Filter has 5 times larger surface area than conventional facemask.

AIRACE

Nuisance Filter

Clip-on Visor

particles)

ACE/6

Optional Accessories:

Active charcoal pre-filter which is fitted over P2 filter, for use on odours and smells at

below occupational exposure levels only. Ideal for working with animals etc.

Eye protection to EN166, 167, 168. (Medium protection against high - speed

Ensures dust mask does not get

contaminated when not in use.

Plastic Storage Box

£3.50

£15.00

£8.50

£33.50

trend



Rubber Face Seal



Clip-on Visor Fitted

AIRSHIELD MK1 RESPIRATOR

286a

Replacement Parts:

Visor Wipes AIR/WIPE (contains 100 wipes)	_ £16.00
Replacement THP2 Fine Filter AIR/10 (1 off)	_ £12.00
Replacement THP2 Fine Filter Pace AIR/1 (pack of 3) Replacement Pre-filter AIR/2 (pack of 3)	_ £ 32.50
Replacement Visor Overlay - Clea AIR/3C (pack of 10)	ar
Replacement Visor Overlay – Gre tint	en Anti-
AIR/3G (pack of 10)	£13.50

Replaceme	ent 4 Hour Battery	
AIR/4		£13.50
Replaceme	ent Charger (UK)	
AIR/5/UK	(240v)	_£20.50
Woodturne	ers Spare Pack	
AIR/WSP		£40.50
Containing:	THP-2 Filter	1 off
	Pre-filters	3 off
	Clear Visor Overlays	10 off
	Replacement Face Seal	1 off
	Battery Charger Pack B hour battery life purchase:	
AIR/BCP/U	JK	£31.00
Containing:	AIR/4	1 off
	AIR/5/UK	1 off



All prices are exclusive of VAT

CNC SMART MACHINES

Computer controlled routing technology, offering affordability and high performance machines for a wide range of applications. Fully guarded as standard for maximum safety.

The bench mounted CNC SMART 💯 is the smallest CNC Machining Centre offering all of the advanced electronic control features and component structure of the larger Smart machines.

trend

CNC/LITE/T10

SMART

600 x 600 machine with 90mm of plunge fitted with the T10 router.

CNC/LITE/HF

£16500.00 600 x 600 machine with 90mm of plunge fitted with a HF head.

£14300.00

(E



The CNC SMART, SMART 🚧 and SMART 🚧 are all high performance floor mounted machines for improved routing productivity. SMART 🚧 machines have a 15 metres per minute feed rate.

trend

CNC/PLUS/T10 £18150.00 860 x 920 machine with 90mm of plunge fitted with the T10 router.

CNC/SMARTPLUS £20350.00

860 x 920 machine with 90mm of plunge fitted with high frequency head.

CNC/SMARTFAST

860 x 920 machine with 90mm of plunge fitted with high frequency head and max. feed speed of 15 metres per minute.

£23595.00

£26000.00

CNC/SMART1300

SMART

860 x 1320 machine with 90mm of plunge fitted with high frequency head and max. feed speed of 15 metres per minute.



See our brochure for more information & full specifications on our range of CNC SMART machines. For details of your nearest **CNC SMART** supplier please call 0800 487363.

114 trend

All prices are exclusive of VAT

ROUTER TABLES, JIGS & ACCESSORIES



PRO ROUTER TABLE

Router not included.

Professional portable router table with aluminium table surface and back fence for floor & bench mounting use.

- Back fence squareness adjustment for absolute accuracy.
- T11E quick release fixing holes for fitting T11 fixing kit.
- Bench leg level adjustment when mounted on a bench.

4 Insert Rings

In sizes 20mm 35mm

54mm & 68mmØ, to suit

different cutter diameters

20mm hole for the T11 Quick Raiser™ adjuster handle.



Guard Assembly Quick lateral & height adjustment of finger pressure and guard.



Back Fence Quick release 110mm cast aluminium back fence with adjustable aluminium cheeks and squareness adjustment.

trend



57mm Dust Spout Aperture With freehand Lead-on Pin park



90mmØ Aperture For larger panel raiser

cutters. Side scales to

set back fence. Pushstick park

on rear. No-volt release

switch with 115 volt (16A) available.

Leg clamps to remove lower legs & adjust for uneven floors.



Quick Raiser Includes holes for T11's Fine Height Adjuster.

Specification:

Mitre Fence

Mitre fence with

spelch block facility.

use.

Rating	Professional/Trade			
Table size	650mm x 550mm			
Bench height	350mm			
Height with legs	830mm			
Router cutter aperture _	90mmØ			
Insert ring sizes	20mm, 35mm, 54mm, 68mmØ			
Back fence height	110mm			
Dust spout aperture	57mmØ			
Voltage	240v or 115v			
115v unit supplied with 16A BS4343 plug and socket.				
Not intended for continuous production or production line				

To fit the following routers directly:

TREND T5, T5 MK2, T9, T10♦, T11♦, BOSCH GOF1600A, 1700ACE CMT CMT1E, 2E DEWALT DW613, 614, 615, 620, 621, 624, 625E, 629 DRAPER PT1200V ELU MOF96(E) MK2, 131, 177(E), OF97(E) MAKITA RP0910, 1110C PERLES OF808(E) >1999 Not 115v

115v routers over 1850w (including T10 and T11) cannot be used with no-volt release switch router tables.

Removable centre plate of table will need to be re-drilled for other makes and models of medium & heavy duty routers

PROFESSIONAL ROUTER TABLE Compatibility See pages 198-199 or go to www.trend-uk.com/compatibility Soft rubber feet to prevent movement Adjustable position for

Bench Leg Level Adjustment Enabling the table to be levelled on an uneven surface

Includes:

- 4 x Insert Rinas
- **1 x** No-volt Release Switch **Mitre Fence**
- 1 x **2 x** Finger Pressures
- **Large Adjustable Safety Guard** 1 x
- Lead-on Pin 1 v
- 1 x Pushstick

Optional Accessories:

£18.50

Large Diameter Hose for T30A 58mm x 1.5 metre increasing suction when used with the T30A.

T30/22

T11 Ouick Release Kit Allows T11 router to be quickly fitted & removed from table. T11/JT/KIT_£22.00



Floor or bench standing with removable legs with adjustment for uneven floors.

PRT or

Extruded 8mm thick aluminium alloy table top with minimal loss of cutter depth.

PRT/L (115v) **£475.00**

- Cutter aperture of 90mm allows the use of the largest router cutters available.
- Cast back fence with extruded adjustable alloy cheeks and 'T' slots.
- Made to EN standards, with back fence accuracy of 0.5° & table flatness of 0.5mm.
- With a suitable size and weight enabling easy re-positioning around the workshop & transportation for on-site use.

All prices are exclusive of VAT



e Finger

Pressures

different widths of imber

CRAFTSMAN ROUTER TABLE MK2

The Craftsman Router Table will suit craftsmen & woodworking enthusiasts. It is packed with the necessary features to maximise the versatility of all popular. portable routers.



ROUTER TABL

- Large aluminium table with parallel ribs over full surface.
- Extension surface extends the width of table by over 400mm.
- Parallel adjustment system of backfence together with measurement strips.
- Fixing plate system beneath table. Plate must be ordered separately.
- High back fence.
- Sliding tenon push block for producing tenons.

Router, pressure clamps and fine height adjuster not included.

Craftsman

54mm

100mm

57mmØ

12.7mm

240v or 115v

32mm, 48mm. 54mm

Router table with 240v switch & fixing plate Order as CRT/MK2 £169.50 **€188.00** & CRT/FP/A,B,C or D* £18.50

€196.00 Router table with 115v switch & fixing plate -Order as CRT/MK2L £177.50 & CRT/FP/A,B,C or D* £18.50

See chart below right for choice.

Includes:

- **Insert Rings** 3 x
- **No-volt Release Switch** 1 x
- **Tenon Block** 1 x
- **Mitre Fence** 1 x
- 1 x Lead-on Pin
- **Safety Guard** 1 x
- Pushstick 1 x

Optional Accessories:

Side Pressure Clamp

CRT MK2 horizontal pressure guard for holding narrow work against the back fence. Can also be fitted to user-made tables.

CRT/11+ £17.50

Spring Pressure Clamps



The spring pressure clamps fit directly to the backfence. They maintain downward pressure when edge profiling or grooving. CRT/10+ (pair) _ £23.50



Profiling Top Guard This is an important safety attachment when profiling with bearing guided cutters. It is clamped to table top and adjusted so that the cutter is guarded.

CRT/2+ ___ £11.50



Specification:

Router cutter aperture

Dust spout aperture

Edge planing up to ____

Insert ring sizes _

Backfence height

Table top size (with extensions)__359 x 1030mm

Table top size (without extensions) 359 x 605mm

Bench height (without floor stand) _____367mm

115v unit supplied with 16A BS4343 plug and socket.

Rating

Voltage



Adaptor	CRT/3	£9.00
Hose	CRT/4	£18.00
39mm x 3 me	etre with a CF	RT/3 adaptor fitted

£59.00

Profiling with

Optional Top Guard

Grooving

Hose T30/22 £18.50 58mm x 1.5 metre for use with T30 Extractor

Floor Stand



CRT/FS+



Fixing Plates

A fixing plate to suit your model of router must be ordered separately.



To fit the following routers: CRT/FP/A+

TREND T3, T5, T5 MK2, T9, T10, T11 AEG OF450S, 500S, OFE710 ATLAS COPCO OFS720, OFSE850, OFS50, **AXMINSTER** AW635R, AW127R **B&D** SR100, BD66, DN67 • BD780(E), KW779, KW780(E) BOSCH POF52 4, 400 4, 500 A 600 ACE , GOF1600 A, 1700ACE CK LEKTO LRT700 CHAMPION CPR850 CMT CMT1E, 2E, DEWALT DW613, 615, 620, 621, 625EK, 629 DRAPER R850V EINHELL EOF850SP ELU MOF96(E) MK1 MOF96(E) MK2. OF97(E), MOF131, 177(E) JCB PRO FELISATTI OF9/LE, MOPIN, I//E) OEB FRW FBF-6E, FBF-8E FP246(E) R546EC FERM FBF-6E, FBF-8E FESTO OF900(E) 1400E, 1400E, 2000(E) HITACHI FM8 III. ZK2008 HITACHI FM8 III. ZK2008 M8(V)(S) HOLZHER 23350, 23550 XINZO 25C44 IIII. ZSC46 KANGO R85505 KRESS FM8955 LYNX RT-800 AMFELL LOSDE 65E MAKITA RP0910, RP1110C● METABO OF528●, OF1028● OFE1229, OF1612, OFE1812, NUTOOL NPT850 PERFORMANCE POWER 1020W, PRO1250R●, 1250RD, 2050R PERLES OF808(E) <1998●, OF808(E) >1999, OF2-808(E) PEUGEOT TDF800 POWER BASE 1020W, EXCEL1250W POWER DEVIL PDW5027, 5026, 5038PR RYOBI R500 , R502 SPARKY X52E STAYER PB50 TRITON TBB001 VIBUTEX FB66F FR77C, 78C WICKES 900W WADKIN R500

CRT/FP/R+

BOSCH POF800ACE, GOF900A, 900ACE, GOF1300A, GMF1400ACE, RYOBI RE600N, R600N, RE601, R601

CRT/FP/C+ MAKITA 3600B**E**, 3620, 3612(C), 3612BR

/FP/D-

ATLAS COPCO OFSE2000 CASALS FT750, 1000E, 2000VCE DRAPER R1900V HITACHI M12SA, M12V(S), TR12 M12V2, FAITHFUL FPPR2000E FREUD FT1000(E), FT2000(E) PEUGEOT DF55E, DEF570E RYOBI RE120, R150, R151, R152, RE155K SKIL 1835 . 1875U1

- Re-drilling of router base by user required
- Re-drilling of insert plate by user required Packing piece supplied by user required Not 115v
- - 115v routers over 1850w (including T10 and T11) cannot be used with router tables Plate size 3 x 179 x 179mm

trend° 117

DC400 DOVETAIL CENTRE

Patent No. US6,032,706. International Patent Applied For

Multi-functional dovetail jig for variable pitch lapped or through dovetails. For use with medium to heavy duty routers.

Our DC400 dovetail centre is the

breakthrough you have been waiting for. It is the world's first variable layout dovetail jig that is completely free of adjustment. You can change from through dovetails to lapped dovetails, adjust the pin and tail guide finger positions, change work-piece thickness all without adjustment.

Now you can have the professional look of hand cut dovetails without the hassles of a complicated jig.

DC400

£275.00

mmmmmm (



Specification:

RatingCraftsma	n/Professional
Dovetail size	Variable
Workpiece width max.	400mm
Workpiece thickness - through	19mm
Workpiece thickness - lapped	25mm
Guide bush size	11.1mm

Full Router Support

Two guide rails provide full support for your router base, so you do not have to balance your router on the edge of a row of guide fingers as per conventional jigs.

> Router and fine height adjuster not included.

MOVE & CLICK

DC400 trend

Accuracy and Repeatability Carbon fibre finger guides click directly into the rear guide rail, engaging in an index strip at increments of 2.5mm. This guarantees true repeatability and means you can restore or reposition guide fingers with absolute accuracy.



Click-in Guide Fingers There are three types of pin guide; angled pin guides for cutting through dovetail pins are available in five different angles from 7 up to 20 degrees. Common fork-shaped tail guides for cutting through and lapped tails; and the straight sided pin guides for cutting lapped pins.

trend

DC

trenc

Visibility and Dust Extraction


Fully enclosed body with a removable window ensures routed waste is directed away from the operator and provides good visibility. The optional snap-in waste collection kit will also remove almost 100% of the waste. Secure Clamping

Clamping channels with two independent parallel clamping bars require only a single hand to operate, enabling the free hand to position the work-piece. The clamping bars and integral side fences are positioned close to the machining area, to ensure total security.



Unique Click-in Guide Fingers:

Through Dovetails

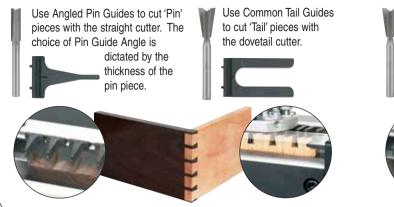


DC400 Includes: 10 x Common Tail Guides 10 x Lapped Pin Guides Max. material thickness 25mm. **10 x 7° Angled Pin Guides** Max. material thickness 19mm. 7° Dovetail Cutter 31/30X1/4TC £20.50 Diameter 11.3mm x 19mm cut x 97° **Straight Cutter** -----3/43X1/4TC Diameter 8.0mm x 25mm cut. £19.50 **11.1mm Guide Bush GB111** £6.50 A Unibase and fine height adjuster may be required for certain makes & models of router. **Lapped Tail Pin Stops** A handed pair of adjustable tail pin stops for rapid repeatability of lapped dovetails.

DC400/10⁺

Optional Accessories:

Analed Pin Guides





£15.00

Max. material thickness 6.4mm-12.7mm. 14° DC400/P/14 (pack of 5)_ £20.50 Max. material thickness 6.4mm-9.5mm.

DC400/P/20 (pack of 5) £20.50 20° Max. material thickness 6.4mm.

Tail Guide Spacer

Can be cut down to act as a packing piece for wider spaced dovetails. 210mm long.

DC400/05

Set of Seven Cutters

SET/DC1X1/4TC SET/DC1X8MMTC	£99.00 £99.00	
Comprises: cutter refs. 3 31/32, 31/33, 31/34 and	31/30, 31/31,	

Replacement Parts: 7° Angled Pin Guides DC400/P/07 (pack of 5) **£20.50** Max. material thickness 19mm.

Common Tail Guides	
DC400/03 (pack of 5)	£20.50
Lapped Pin Guides	
DC400/04 (pack of 5)	£20.50
Max material thickness 25mm	



Dovetail Cutters

£15.00

Dorotan	outtoro	
9°	31/31X1/4TC Diameter 11.3mm x 15.8	
11°	31/32X1/4TC Diameter 11.3mm x 12.7	
14°	31/33X1/4TC Diameter 11.3mm x 9.5m	
20°	31/34X1/4TC Diameter 11.3mm x 6.3n	
Straight (Cutters for looser or t	ighter tails
	/4TC	

Diameter 7.9mm x 25mm cut.	
3/44X1/4TC	£19.50
Diameter 8.1mm x 25mm cut.	

For Box or Comb Joints

3/45X1/4TC Diameter 8.9mm x 25mm cut. Waste Collector Kit

_£33.00 DC400/01 Dust spout size 25.4mm & 57mmØ.

Lapped Dovetails





Through Dovetails Cutter Choice:

Pin Piece Dovetail Cutters					
Thickness	19mm 7°	16mm 9°	12.7mm 11°	9.5mm 14°	6.35mm 20°
Product Ref.	31/30	31/31	31/32	31/33	31/34
6.35mm min.	OK	OK	OK	OK	Select
9.5mm	OK	OK	OK	Best	-
12.7mm	OK	OK	Best	-	-
16mm	OK	Best	-	-	-
19mm	Best	-	-	-	-

Lapped Dovetails Cutter Choice:

Drawer Front Thickness Range	Depth x Angle	Suggested Cutter Product Ref.
25mm max.	19mm x 7°	31/30
19 - 25mm	16mm x 9°	31/31
15.8 - 22mm	12.7mm x 11°	31/32
12.7 - 19mm	9.5mm x 14°	31/33
9.5 - 15.8mm	6.3mm x 20°	31/34

Accessory Kit

Comprises: Waste collector set, cable support, 9 off angled pin guides for 9°, 11°, 14° and 20° dovetails, 7 piece cutter set (SET/DC1), tail guide spacer & pair of adjustable tail pin stops.

DC400/02 (1/4" shank) _ £209.50 DC400/02X8MM (8mm shank) £209.50

DC400 Video Instructional video 22 minutes. VHS. TV/9 £11.00



Universal Sub-Base



Certain makes & models of router will require a Unibase to accept the guide bushes.

UNIBASE

£14.50

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads

+ While stocks last.

£19.50



CDJ300 & 600 DOVETAIL JIGS

Two accurate and easy to use Dovetail Jigs for a variety of elegant joints.

- Two sizes 300mm (12") and 600mm (24").
- Cuts 1/2" wide half blind dovetails or rebated dovetails in one operation.
- Precision made laser cut zinc plated steel template with packing piece.
- Adjustable offset stops for 600mm jig.
- A Unibase and fine height adjuster may be required for certain makes of router.
- A range of accessory templates are available for box joint, dowel and through dovetails for both jigs.*


CDJ300 _€89.00 CDJ600 _£149.00

Includes:

- 1 x 1/4" Shank TCT 104° Dovetail Cutter
- 1 x 15.8mm Guide Bush

Replacement Dovetail
CutterReplacement Guide
Bush
Diameter
15.8mmDiameter 12.7mm x 104°GB158£6.50

Optional Accessories: Lapped Dovetail



104	
10	
125	

Lapped Dove	etail Templates *
CDJ300/01	£39.50
CDJ600/01	£45.50

Cutter C154X1/4TC _____€13.00 Diameter 6.0mm x 98°



Universal Sub-Base Certain makes & models of ro

Certain makes & models of routers will require a Unibase to accept the guide bushes. UNIBASE £14.50

Box Joint

	M	8mm	12.7mm
	Min.	8mm	8mm
1	Max.	15mm	20mm

......

Box Joint Templates

CDJ300/03 * (8mm) _	£42.00
CDJ600/03 * (8mm) _	£47.50
CDJ300/02 (12.7mm) _	£42.00
CDJ600/02 (12.7mm) _	£45.50

Cutter for 8mm Template C012AX1/4TC _____£9.50 Diameter 8.0mm x 25mm cut

Diameter 8.0mm x 25mm cut

Cutter for 12.7mm Template C021AX1/4TC _____£11.50

Diameter	12.55mm x 25mm cut	

- * Guide bushes and edge stops included where applicable.
- For heavy duty routers only
- T Template size
- M Material thickness

CDJ600 workpiece width max. ___600mm Guide bush size ______15.8mm Router base dia. max. _____180mm

Craftsman 12.7mm

12mm

25mm

300mm

Specification:

Workpiece thickness max.

CDJ300 workpiece width max.

Rating

Dovetail size ______ Workpiece thickness min.

ozini ociac boncing				
M	32mm centres			
Min.	N/A			
Max.	25mm			
	M Min.			

trend

CDJ300 trend

.........

	-
Dowel Templates	
CDJ300/04£6	64.50
CDJ600/04£7	/9.50
Suggested Router Dowe Drills	ļ
C174X1/4TC £1 Diameter 5.0mm x 35mm cut	2.00
C175X1/4TC £1 Diameter 6.0mm x 35mm cut	13.00
C176X1/4TC £1 Diameter 8.0mm x 35mm cut	4.00
C177X1/4TC£1 Diameter 10.0mm x 35mm cut	15.00
Londe a sur la serve l'anada ba	

-

Router and fine height

adjuster not included.

Compatibility See pages 198-199 or go to www.trend-uk.com/compatibility




Par la	Through Dovetail			
1	M	12.7mm	19mm	
8	Min.	8mm	17mm	
5	Max.	17mm	25mm	

Through Dovetail Templates * Templates are dual sided for Pin & Tail. Two cutters are required for each template. (Straight & Dovetail)
CDJ300/05 (12.7mm)£64.50
CDJ600/05 (12.7mm) £79.50
CDJ600/06 (19.0mm)▲ _ £79.50
Cutters for 12.7mm Template C178X1/4TC£14.00 98° Dovetail cutter
C012AX1/4TC£9.50 Straight cutter 8.0mm diameter
Cutters for 19.1mm Template▲ C179£19.50 97° Dovetail cutter 8mm or 1/2" shank.
C021 £12.00 Straight cutter 12.7mm dia. 8mm or 1/2" shank.



To download Videos, Test Reviews, Spare Parts & Instruction Manuals
Visit: www.trend-uk.com/downloads

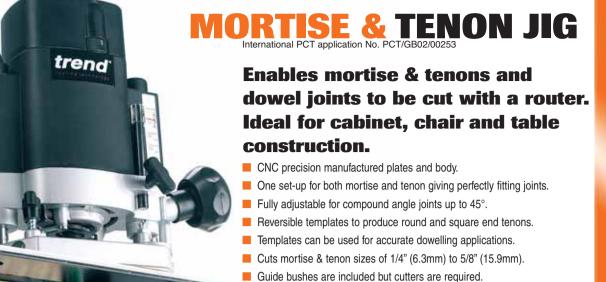

- A Unibase may be required for certain makes & models of router.
- All tenons are cut with a 5/8" diameter straight cutter (Ref. C026). The width of the tenon is adjusted by using different guide bush diameters.

MT/JIG **MT/JIG/EURO***

£179.50 £179.50

*Metric size jig requires metric cutter set Ref. SET/MT2X8MMTC. This set comprises of 6, 8, 10, 12 & 16mm dia. straights. Shank dia. 8mm.

Includes: **Guide Bushe** Clamps **Guide Bush Collar** Set-up Bar 1 x

Hex key

Specification:
Material thickness min

Material thickness min.	12mm	
Material thickness max.	50mm	
Tenon thickness min.	4.8mm	
Tenon thickness max.	16mm	
Tenon length max. using		
vertical guide +	90mm	
Mortise length max. using		
vertical guide ++	90mm	
Angle tilt compound	10° to 45°	
+ on end of 100mm wide material.		

_

++ unlimited if vertical guide removed and wood repositioned.

Video manual available See page 195 for full details. £10_00

Compatibility

www.trend-uk.com/compatibility

Router not

included





Routing The Mortise

Tenon

Width

1/4" (6.3mm)

5/16" (7.9mm)

3/8" (9.5mm)

1/2" (12.7mm)

5/8" (15.8mm)

3/16" (4.8mm)

7/16" (11.1mm)

9/16" (14.3mm)

Optional Accessories: A set of five long reach straight cutters with diameters of 1/4" to 5/8" suitable for use with the Mortise and Tenon Jig.

SET/MT2X8MMTC (8mm shanks for metric jigs)

Cutter

Ref.

C008

C012

C022

C026

C003

C018

C024

Other sizes possible. (Guide bushes shown below not

included with jig)

SET/MT1X1/4TC (1/4" shank) SET/MT1X8MMTC (8mm shank)

SET/MT1X1/2TC (1/2" shank)

Setting-up Square Tenon

£47.50

£47.50

£48.50

£47.50

Diameter 1-1/4" (31.8mm)

Guide Bush

1-3/16" (30.2mm)

1-1/8" (28.6mm)

1" (25.4mm)

7/8" (22.2mm)

1-5/16" (33.3mm)

1-1/16" (27mm)

15/16" (23.8mm)

Double Loose Tenon



Steel Guide Bushes Optional steel bushes. GB158, GB222, GB238, GB27, GB286, GB302, GB318, **GB333.** (each) £6.50



Universal Sub-base Certain makes & models of router will require a

Unibase to accept the guide bushes. UNIBASE £14.50



USA Guide Bushes American pattern brass guide bush set of 9 sizes from 7/8" to 2-1/8".



Allows USA guide bushes to fit TBC Routers GB/5/US

Dust Kit


Dowel Joints

Dust Kit with 57mm dust spout aperture and 32mm adaptor.

MT/DUSTKIT_ £22.00



trend° 121





Special TC Router Cutter Unique designed cutter with built in depth guiding bearing fitting to shank.



Setting-up The diameter of the finished access hole will be 250mm. Carefully mark the centre point of the circle, if possible positioning the access hatch between the floor joists. Screw the Routabout jig to the floor using a single No. 8 particle board screw at the centre point to act as a pivot.



Routing Procedure With the guide bush and cutter fitted to the router, place onto the template. The depth is automatically set by a top guide bearing attached to the cutter body. Rotate the router around the centre screw in a clockwise direction, cutting to the full depth in a series of shallow steps until the cutter breaks through.



Completed Cut


When cut, the waste piece is supported by the wings of the jig. The stepped cutter automatically cuts a rebated edge on the waste piece as well as around the edge of the hole.



End Result

Fit the plastic insert ring into the access hole and turn the waste piece over. Drop it into the ring and it will lay flush with the floor surface.

122 trend

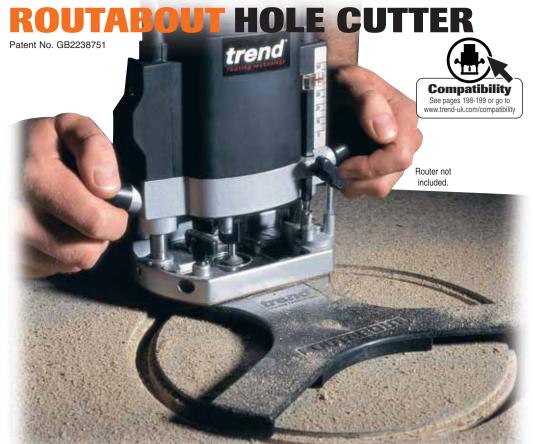

Access to pipes & cables beneath chipboard floors in seconds. For builders, plumbers & electricians.

- A 250mm diameter opening can be cut and made good in seconds.
- Designed for use in new or existing 18mm and 22mm chipboard or similar floors.
- Cuts only the thickness of the board.
- No waste, the piece cut out is used to make good the floor.
- All you need is a plunge router (750 watts or above). Cutters are offered with 1/4" or 1/2" shank sizes. An 8mm shank cutter is available as an accessory.
- A Unibase may be required for certain makes and models of router.

ROUTABOUT KITS:

for 18mm Thick Floors

RBT/1 (with 1/4" shank cutter) RBT/2 (with 1/2" shank cutter)	£44.50 £44.50
for 22mm Thick Floors	
RBT/3 (with 1/4" shank cutter)_	£47.50

	(with 1/4" shank cutter)_	£4/.jU
RBT/4	(with 1/2" shank cutter)_	£47.50

Includes:

- 1 x Routabout Template
- 3 x Spacer Rings
- 1 x Special TCT Router Cutter
 - x 30mm Plastic Guide Bush

All prices are exclusive of VAT

Optional Accessories:

Universal Sub-base Certain makes & models of routers will require a Unibase to accept the guide bushes. UNIBASE £14.50 0

Replacement Parts: Heavy Duty 30mm Guide Bush £6.50 **GB**30 **Replacement Rings** for 18mm Thick Floors RBTRNG18/10 (pack of 10) £33.00 RBTRNG18/100 (pack of 100) £306.50 RBTRNG18/250 (pack of 250) £747.00 for 22mm Thick Floors RBTRNG22/10 (pack of 10) £39.00 RBTRNG22/100 (pack of 100) £368.50 RBTRNG22/250 (pack of 250) £897.50 **Replacement Cutters** for 18mm Thick Floors **RBT/CUT/1** (with 1/4" shank) £33.00 RBT/CUT/5 (with 8mm shank) £33.00 **RBT/CUT/2** (with 1/2" shank) £33.00 for 22mm Thick Floors **RBT/CUT/3** (with 1/4" shank) £35.50 **RBT/CUT/6** (with 8mm shank) £35.50 RBT/CUT/4 (with 1/2" shank) _ £35.50 **Replacement Template**

RBT/PLATE ______£18.50

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads



Special TC Router Cutter Unique designed cutter with built in depth guiding bearing fitting to shank.



Setting-up The diameter of the finished access hole will be 108mm. Carefully mark the centre point of the circle, if possible positioning the access hatch between the floor joists. Screw the Routabout jig to the floor using a single No. 8 particle board screw at the centre point to act as a pivot.



Routing Procedure

With the guide bush and cutter fitted to the router, place onto the template. The depth is automatically set by a top guide bearing attached to the cutter body. Rotate the router around the centre screw in a clockwise direction, cutting to the full depth in a series of shallow steps until the cutter breaks through.



Completed Cut When cut, the waste piece is supported by the wings of the jig. The stepped cutter automatically cuts a rebate around the edge of the hole.



End Result Fit the plastic cover into the access hole. It will lay flush with the floor surface.

MINI ROUTABOUT HOLE CUTTER

trend

NEW



Router not

Smaller version of the successful Routabout for access to pipes & cables beneath chipboard floors in seconds. For builders, plumbers & electricians.

- A 108mm diameter opening can be cut and made good in seconds.
- Designed for use in new or existing 18mm and 22mm chipboard or similar floors.
- Cuts only the thickness of the board.
- A cover is used to fill in the cut-out.
- All you need is a plunge router (750 watts or above). Sets are offered with 1/4" or 1/2" shank diameters.
- A Unibase may be required for certain makes and models of router.
- Maximum weight on cover is 380kg.

MINI ROUTABOUT KITS:

for 18mm Th	ick Floors	
	(with 1/4" shank cutter) _	£40.50
M/RBT/2	(with 1/2" shank cutter) _	£40.50
for 22mm Th	ick Floors	
M/RBT/3	(with 1/4" shank cutter) _	£42.00
M/RBT/4	(with 1/2" shank cutter) _	£42.00
Include	s: 🚺	

menues:

- 1 x Mini Routabout Template
- 3 x Covers
- 1 x Special TCT Router Cutter
- **1 x** 30mm Plastic Guide Bush

All prices are exclusive of VAT

Optional Accessories:

Universal Sub-base Certain makes & models of routers will require a Unibase to accept the guide bushes. UNIBASE _____£14.50













STAIRCASE HOUSING

These template jigs are a well proven means of routing out stair housings quickly and accurately.

- Constructed from hard wearing solid laminate and includes a reversible fence for exact matching of stair strings and fully adjustable nosing piece (STAIR/A).
- Built-in heavy duty front clamp for quick clamping for
 - Adjustable to suit private and common stair angle pitch
- Standard TCT dovetail cutters are offered for various tread thicknesses for the closed riser staircase jig (STAIR/A). The open riser staircase jig (STAIR/B), incorporates a stub riser to conform with building
- Sub-base is pre-drilled to suit Trend/Dewalt/Elu 1/2" routers, for other makes the sub-base will have to be re-drilled. Please state make and model when ordering.
- All heavy duty routers over 1600 watts can be used.
 - STAIR/B £149.00 (Open Riser) **Includes:** Adjustable Reversible Clamp **Reversible Clamp Bar** Sub-Base 24mm Guide Bush Line-un Pin Spanners Line Up Guide Bush 1 x **Optional Accessory STAIR/B**: **Recommended Cutters**

For Tread Thickness 4/21X1/2TC 32mm (1-1/4") _ £34.50

> Visit: www.trend-uk.com

SHELF SUPPORT TEMPLA

A template to allow routing or drilling of 32mm centre holes for 5mm diameter shelf supports.

- Made from clear plastic, with graduation scales.
- Adjustable clamping bar with two locking knobs.
- Can be used with MDF, timber & particle board.
- Some routers may require a Unibase to accept the guide bush.

Accessories:

Metal (Glass) Shelf Support SS/M5/12 (pack of 12) £2.25 With rubber sleeve for glass. Sleeve can be removed. Pin=5mmØ x OL=16.5mm



Plastic Shelf Support SS/P5/12 (pack of 12) _£2.25 Load capacity 100kg.

Suitable Cutters

12 x Plain Metal Shelf Supports **1 x** Knurled Repeat Index Pin

TEMP/S

Size: 500 x 130 x 8mm

1 x 9.5mm Guide Bush

Includes:

61/05X1/4TC £17.50 Dia. 5mm x 35mm length C174X1/4TC £12.00 Dia. 5mm x 35mm length

100



5mm Shelf Support Drill Bit Guide A quick release shank lip and spur 5mm HSS drill bit guide, which when used with a template will allow 5mm diameter blind holes to be drilled for 5mm Shelf Supports.

5-1-1- B. B. B. TEMP/SSD/5MM _£21.50

Load capacity applies to four shelf supports being evenly distributed.



All prices are exclusive of VAT

LETTERBOX JIG

Enables the cutting out of letterbox openings to be carried out quickly and accurately.

- The size-adjusting jig ensures that template openings are always cut exactly square.
- Made from cast aluminium and machined to a high standard.
- Simple to set up and use.
- The jig is adjustable to enable apertures to be cut out as small as 210mm by 46mm and as large as 310mm by 82mm.
- Requires 1/2" diameter x 50mm cut length cutter.
- Includes 30mm x 10mm spigot quide bush.
- Unibase may be required for certain makes and models or router.

Optional Accessories: Recommended Cutter

12.7mm (1/2") diameter x 50mm cut.	
3/83DX1/2TC	£29.00
TR17DX1/2TC	£23.00
C153DX1/2TC	£20.50

Universal Sub-base

Certain makes & models of router will require a Unibase to accept the auide bushes. UNIBASE £14 50





LB/JIG

£76.00

Compatibility See pages 198-199 or go to www.trend-uk.com/compatibility

LETTERBOX TEMPLATE

Clear plastic template for use with any plunge router to accurately fit three sizes of letter box plates.

- Made from 8mm thick clear plastic.
- For three sizes of letterbox plate sizes: 220 x 50mm, 210 x 60mm & 200 x 60mm.
- Use on wooden doors up to 50mm thick.
- Use with 1/2" collet plunge router.
- Requires 12mm cutter and 30mm guide bush.
- A Unibase may be required for certain makes and models of router.

Optional Accessories:

Recommended Cutter	
12mm diameter x 50mm cut.	
3/73X1/2TC	£28.50
TR37X1/2TC	<u>£26.00</u>
C200DX1/2TC	£18.50
Recommended 30mm Guide Bush	

GB30

Universal Sub-base

Certain makes & models of router will require a Unibase to accept the guide bushes. UNIBASE £14.50



Size: 326mm x 290mm x 8mm

ROUTER T-SQUARE

The Router T-Square can be used as a straight guide for routing housings,

squaring & trimming boards and jig setting.

- It is also ideal as a general workshop square for marking and setting out.
- Made from hard wearing solid phenolic resin.
- Has false cheek fitting facility.
- Squareness tolerance 0.5mm over 1 metre.



£47.50



To download Videos, Test Reviews, Spare Parts & Instruction Manuals Visit: www.trend-uk.com/downloads

Router and clamp not included.



Router not

included

KITCHEN WORKTOP JIGS

The best worktop jigs in the world, designed to enable all 1/2" shank plunge routers to cut precise butt & scribe joints in postform worktops.


Combi Jig Features:

- Machined from hard wearing solid laminate.
- Will produce a joint in 15 minutes including setting-up time.
- Out-of-square joints can be accommodated (COMBI 66 & 1002).
- Facilities to cut various widths of board and thicknesses up to 42mm.
- Integral panel bolt connector recessing template with easy spanner access.
- Width setting stop for accurate positioning.
- Supplied with clear & comprehensive instructions for use.

All Jigs Require:

- A portable plunge router with 12.7mm (1/2") shank capacity and minimum 1300 watts.
- A template guide bush with 30mm outside diameter.
- A TCT router cutter with 12.7mm (1/2") diameter and 50mm (2") cut length.
- Two 100mm (4") throat clamps.

T10 Router



OMBI 600 JIG


rend

Lightweight jig for use on both bathroom & kitchen worktops.

NEW

COMBI 66 JIG

Jia from 500mm to 650mm wide worktops, with Peninsular cut. 3.3kg

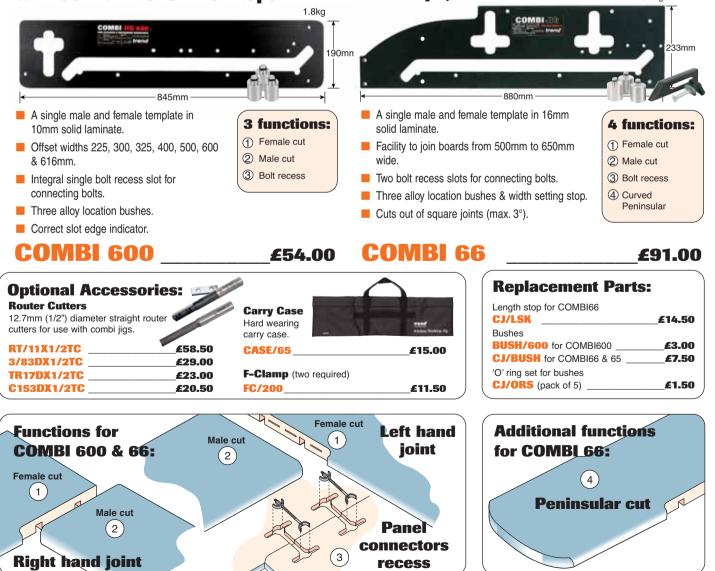



All prices are exclusive of VAT

To download Videos, Test Reviews, Spare Parts & Instruction Manuals www.trend-uk.com/downloads

Visit:

COMBI 1002 JIG

For up to 1000mm wide worktops now with cable tidy insert & circular hinge cut apertures.

- A single male and female template in 16mm solid laminate.
- Facility to join boards from 450mm to 1000mm wide.
- Facility to cut 22.5° mitre corners for hob units.
- Integral template slots for rounding and mitring of peninsular worktop corners, for cable tidy inserts and a circular concealed hinge aperture and 3/4" BSP hole for mixer taps.
- Three alloy location bushes and a width-setting stop.
- Colour coded pin location for quick and easy use.
- Three bolt recess slots for connection bolts.

Optional Accessories:

12.7mm (1/2") diameter straight router cutters for use with combi jigs.

Router Cutters

RT/11X1/2TC

3/83DX1/2TC

TR17DX1/2TC

C153DX1/2TC

Hard wearing carry

Carry Case

CASE/1001

case.

Cuts out of square joints (max. 3°).

NEW FEATURE 3/4" BSP HOLE FOR MIXER & SINGLE TAPS



£58.50

£29.00

£23.00

£20 50

£22.50

Router & clamps not included.

£37.50

£34.50

£2.00

£11.50



rend

10 functions: Female cut Male cut

- Connector bolt recess
- Curved peninsular
- 45° end cut
- Corner radius
- 22.5° mitre corner joint
 Cable tidy insert
 35mm circular hinge
 3/4" BSP hole

Replacement Parts:

Length stop CJ/LSK	£14.50
Bushes CJ/BUSH	£7.50
'O' ring set for bushes CJ/ORS (pack of 5)	£1.50

Three types of Peninsular **COMBI 1002 Functions:** Worktop corner cuts. The unique colour-coded system makes 45° end cut the 1002 jig quick and easy to use. 22.5° Mitre Corner joint Three cable Panel tidy inserts & Connector **Corner radius** recess Mitre worktop joints 35mm circular for hob units hinae. See page 141 for further details. Curved peninsular Female cut Female cut 60mmØ 80mmØ D. Male cut 105 x 55mm Male cut 35mm ninae Left hand joint **Right hand joint**

Bolt-on Clamps Clamps for 1001 & 1002 only:

PJ/CL/L Long Clamp

PJ/CL/S Short Clamp

PJ/FBK Fixing Bolt Kit

(incl. 2 x fixing bolt kit)

(incl. 1 x fixing bolt kit)

(set of 3)

F-Clamp

FC/200

(two required)

All prices are exclusive of VAT







Left hand joint

Right hand joint

WORKTOP JIG ACCESSORIES

Universal Sub-Base


For obtaining concentricity of the cutter relative to the guide bush. Fits the bases of most heavy duty routers. See page 142 for further details.





F Clamps

Quick action gripper clamps with 100mm throat. Durable steel construction with removable jaws.



Biscuit Jointing Cutter

Biscuit jointing set to give extra stability to worktop joint, for use with No. 20 biscuits.



Metal Ended Worktop Connectors

Panel bolt connectors to connect worktop joint together. 150mm overall length.

PC/50/M (pack of 50)	£32.50
PC/100/M (pack of 100)	£59.00
PC/1000/M (pack of 1000)	£521.50

Two Flute TC Tipped Cutters

12.7mm (1/2") diameter straight TCT router cutters for use with combi jigs.

for use with combiligs.	
3/83DX1/2TC	£29.00
3/83MX1/2TC (short shank)	£29.00
TR17DX1/2TC	£23.00
C153DX1/2TC	£20.50

Replaceable Tip Cutters

Replaceable tip cutter for Combi Jigs

inopiaceasie ap catter for compressed	
RT/11X1/2TC£58.5	i 0
RT/11MX1/2TC (short shank)£58.5	i 0
RB/A (blade for RT/11)See page 14 for price	es.
Replaceable tip cutter for KWJ900	
RT/13X1/2TC£66.5	;0
RB/H (blade for RT/13)See page 14 for price	es.
0.0	

WORKTOP SCRIBER

Design Reg. 3014615

Gives offset between worktop jig and guide bush for ease of setting up.

Allows true cutter path to be drawn.

- Scribes directly onto worktop.
- For 30mm guide bush and 1/2" router cutter.

M/KWS01 __£15.50

DRAINING GROOVE JIG

For routing draining grooves in solid timber for Belfast type sinks.

- Made from 12mm hardwearing CNC machined phenolic.
- Provides a 0.5° fall.
- Grooves at 50mm pitch and 455mm long.
- Sight marks for lining up.
- Three removable sloping runners for support.
- Cutter diameter check hole.
- Fixing holes for user made stops for repetition work.



Includes:

- 1 x 30mm guide bush
- 1 x 1/2" shank TCT R9.5mm cove cutter

Replacement Parts:

 Cove Cutter radius 9.5mm

 C056AX1/2TC
 £24.50

 Guide Bush diameter 30.0mm



Specification:

Fall	0.5°
Groove pitch	50.0mm
Groove length	455mm
Slat width	19.8mm





۵.

CONNECTING BOLT RECESS TEMPLATE

Single bolt recess template for jointing kitchen worktops.

- Dowel pin location.
- For 30mm guide bush and 1/2" router cutter.
- Made from MDF.

PBT/PAC

£19.00 Size: 400 x 200mm



trend° 129



CONTRACTOR HINGE JIG

Patent No. GB2285410 with adjustable apertures.

The Hinge Jig is a portable template set designed for recessing hinges in wooden doors & frames. It is easy to use with minimal setting-up time, completing the job both accurately & quickly.


HINGE/JIG (single piece) ____£224.00 H/JIG/A (two piece)

£234.00

Includes:

- **Apertures** 4 x Bradawls with Spacer 2 x
- 16mm Guide Rush 1 x
- 1 x **T-Handle Hex Key**
- 4mm Spacing Gauge
- Plastic Storage Tube (with HINGE/JIG) OR
- Fabric Storage Case (with H/JIG/A)



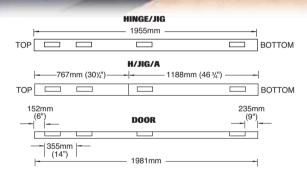

- Used on-site & in joinery shops to increase productivity with excellent results.
- Four apertures for fire door requirements.
- No need for marking out in the conventional way.
- Quick & simple to set-up as the hinge is used as the pattern.
- Clean & accurate recesses are achieved every time.
- Suitable for timber based doors & square butt hinges.
- Use with a light duty router with 1/4" collet.
- Long reach router cutter required, 12mm diameter with 70mm overall length.
- Angled position slots to prevent creep.

130 trend

and the second second	
Specification:	
Hinge sizes possible	
Length min.	2-5⁄8" (67mm)
Length max.	
Width min.	3⁄8" (9.5mm)
Width max	1-3⁄8" (35mm)
Door sizes possible	
Height min.	6' 5" (1955mm)
Height max.	6' 10" (2100mm)
Thickness min.	5⁄8" (16mm)

Router not

included

H/JIG/A

Supplied in

fabric case

trend

HINGE JIG

Two piece hinge jig

for easy handling.

Optional Accessories:

Universal Sub-Base

IINIRACE

Certain makes & models of router including the T4 will require a Unibase to accept the guide bushes.

£14 50

Long Reach cutters

j	
3/8LX1/4TC	£21.50
FR12X1/4TC	£19.50
C019AX1/4TC _	£14.50
12mm diameter.	
Low Profile Arc	hitrave Fitted Bush Kit

£9.00 HJ/1A pair of 3mm thick bushes so jig

can be used where architrave is fitted 4mm back from lining.

£11.00

CORNER CHISEL

For squaring corners on hinge recesses.

C/CHISEL

- Squares up rounded corners in one operation.
- Use with a hammer.
- High Speed Steel (HSS) Anvil.
- For use with hinge and lock jigs.
- Can be re-sharpened.


All prices are exclusive of VAT



Replacement

4mm Feeler Gauge WP-HJ/10 £2.25

Aperture Block WP-HJ/02

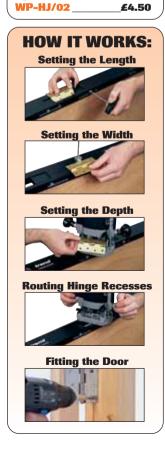

ompatibility	trend	INTERNAL DOOR	
v.trend-uk.com/compatibility	PAX	Patent No. GB2285410 with preset apertures for 75mm	n hinges
		A light duty hinge jig for rout	ing
10- 10-		75mm hinge recesses in inte	-
STA .		doors and linings.	
and the second sec		 Hard wearing template in 12mm laminate. 	
		 Two part, splits into two lengths with dovetail joint. 	
•••		One set up for door and frame. No need to adjust for repeate	d doors.
pecification:	Router not included.	Three pre-set apertures 6" down, 9" up and middle.	
nge size		For internal doors 15mm to 51mm thick with separate (plant of Swivel end plate for 3mm gap to head of door.	on) stops.
dth min21.65mm or sizes possible	Includes: 2 x Bradawls with Spacer	Die words in De beeks	10
ight min6' 5" (1955mm) ight max6' 10" (2100mm)	1 x 16mm Guide Bush	Includes three 10mm diameter plastic pins with tapered should be a state of the	lder for
ickness min25mm	3 x Pins	tight fit, two bradawls and 16mm guide bush. Unibase may be needed.	
and the second second			/
Optional Access			
niversal Sub-Base Certain mak			85.00
models of ro including T4	will TR12X1/4TC	£19.50	
require a Un to accept the			
NIBASEbushes.	E14.50 Fabric Carry Case	152mm (6") 235m	ım (9")
pare Pin WJ/PIN/4 (4 pack)			
(4 pack)		£11.00	
			1
Set the Position	Butt Pins against Door or Frame	Fit the Bradawls Set the Cutter Depth Rout H	linge Rece
BUTT H		NPLATE Router, clar batten not inc	
A routing tem		Compatibility	4.14
•	-	www.trend-uk.com/compatibility	
llowe a route			
			14
			- 10L
Made from clear 8mm thick	k plastic.		
hinge reces Made from clear 8mm thic	k plastic. for 75mm and 100mm butt		
hinge reces Made from clear 8mm thick Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which	k plastic. for 75mm and 100mm butt e to hold templates.	Optional Accesse Recommended Cutter	ories:
 hinge reces Made from clear 8mm thick Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which corner chisel or chisel. 	k plastic. for 75mm and 100mm butt e to hold templates. ch can be removed with a	Recommended Cutter 3/8LX1/4TC	<u>£21.50</u>
 hinge reces Made from clear 8mm thick Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which corner chisel or chisel. Use on doors from 35mm 	k plastic. for 75mm and 100mm butt e to hold templates. ch can be removed with a to 44mm thick.	Recommended Cutter 3/8LX1/4TC TR12X1/4TC C019X1/4TC	
 hinge reces Made from clear 8mm thick Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which corner chisel or chisel. Use on doors from 35mm 	k plastic. for 75mm and 100mm butt e to hold templates. ch can be removed with a to 44mm thick.	Recommended Cutter 3/8LX1/4TC TR12X1/4TC C019X1/4TC 12mm diameter.	£21.50 £19.50 £11.00
 hinge reces Made from clear 8mm thick Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which corner chisel or chisel. Use on doors from 35mm for Requires 12mm diameter of bush. A user made batten 44mm 	k plastic. for 75mm and 100mm butt e to hold templates. ch can be removed with a to 44mm thick. cutter and 30mm guide	Recommended Cutter 3/8LX1/4TC TR12X1/4TC C019X1/4TC	£21.50 £19.50 £11.00 sh
 Includes metal templates for hinges. Magnets in template frame Cuts rounded corners which corner chisel or chisel. Use on doors from 35mm for Requires 12mm diameter of the second seco	k plastic. for 75mm and 100mm butt e to hold templates. ch can be removed with a to 44mm thick. cutter and 30mm guide n x 34mm x 450mm is also	Recommended Cutter 3/8LX1/4TC TR12X1/4TC C019X1/4TC 12mm diameter. Recommended Guide Bu	£21.50 £19.50 £11.00 sh

Visit: www.trend-uk.com/downloads

trend 131

ROUTING JIGS

LOCK JIG

T

ନ

OCK JUG

Corners of the face-

plate can be squared

with the Corner Chisel - see page 130. trend

Compatibility

See pages 198-199 or go to

www.trend-uk.com/compatibility



This jig uses a set of interchangeable templates & with a router will cut the mortise & face-plate recess for popular door locks.

- For most common sash mortise & dead locks, with up to 3" deep mortises & a 7/8" or 1" face-plate. Deeper mortises can be achieved with a suitable size of auger bit.
- Fast, clean & accurate results on doors 34mm to 58mm thick, even in hardwood.
- CNC precision manufactured plates & body.
- The jig requires a plunge router with a 80mm plunge, fitted with a 30mm guide bush & 12mm diameter long reach cutter.

Includes: **Guide Bush Collar**

12 x Face Plate Templates

4 x Mortise Templates
Optional Accessories: Guide Bushes GB30 (Standard 30mm)£6.50 GB160 (Special 16mm)£8.50
UNIBASE
Recommended Cutters 3/75X1/2TC£32.50 TR37X1/2TC£26.00 C172X1/2TC£18.50 12mm diameter x 115mm overall length. For up to 70mm deep mortise depending on plunge of router and use of Unibase etc.
3/8LX1/4TC£21.50 TR12X1/4TC£19.50 C019AX1/4TC£14.50 12mm diameter x 70mm overall length. Deepening of mortise with auger bit required. Extra Templates Call 01923 224681 for special sizes.
WP-LOCK/T/13 £6.00 Union 2642 face-plate. Size 22mm x 95.5mm. Mortise size 15mm x 51mm. WP-LOCK/T/14 £19.50 Perko® R2 closer rectangle face-plate. Size 25mm x 51mm.
WP-LOCK/T/15 £6.00 ERA* latch face-plate. Size 25.1mm x 57.1mm, mortise 23.5mm. WP-LOCK/T/16 WP-LOCK/T/16 £6.00 Face-plate size 26mm x 110mm. £6.00
WP-LOCK/T/17 £6.00 Face-plate size 25.6mm x 153mm with rounded ends. WP-LOCK/T/18 £6.00 Face-plate size 25.6mm x 60.2mm. £6.00 Face-plate size 25.6mm x 60.2mm.
WP-LOCK/T/G£6.00 Double face-plate. Size 24mm x 57mm and 19mm x 41mm.

HOW IT WORKS:

Templates Both the mortise & the face-plate are selected to suit the size of the lock. Templates are held by two powerful magnets.

Compatibility

Must be used with a 30mm guide bush & 12mm diameter cutter. For deep mortises a heavy duty router should be used with the long reach cutter.


Hinge & Lock Operations

If a medium duty router is to be used, then full mortises are not possible & a suitable sized auger bit in a drill will be required. If the Lock jig is to be used in conjunction with the Trend Hinge Jig, then the collar should be used to bush out the 16mm guide bush to 30mm.

Final Application

Mark the appropriate position for the lock & centralise on the door using the centre line notches within the jig aperture. The jig can then be clamped to the door. In most applications, the door will be held secured on its side



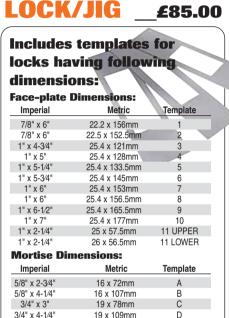

3/4" x 4-1/4" 19 x 109mm These are maximum mortise lengths, unless radius ends are squared with a chisel. However smaller mortise locks can be accommodated depending on position of their fixing screws.

Replacement Part: Replacement Guide Bush Collar

Fits to GB160 as supplied with the Trend Hinge Jig to give 30mm OD. Secures to bush with integral 'O' ring. **GB/COLL/1630** £5.00

CK RECESS TEMPLATE E.C. Design Reg. 000132246-002

Clear plastic template for use with any plunge router to accurately fit 2, 3 and 5 lever sash and dead mortise locks

- Clear plastic with magnets to hold metal templates.
- Includes six recess and three mortise templates.
- Requires 12mm diameter x 63mm cut length cutter with 1/2" shank and 30mm guide bush. A 1/4" shank extra long cutter can also be used but deepening of mortise with auger bit will be required.
- User made batten 44mm x 34mm x 450mm is also needed.



Optional Accessories:

Recommended Cutters	
3/75X1/2TC	£32.50
TR37X1/2TC	£26.00
C172X1/2TC	£18.50
12mm diameter x 63mm cut length.	
3/8LX1/4TC	£21.50
TR12X1/4TC	£19.50
C019AX1/4TC	£14.50
12mm diameter x 70mm overall len	ath

Recommended Guide Bush

GB30 (a Unibase may be required) £6.50

TEMP/LR/A

Size: 320mm x 135mm x 8mm

£44.50

Router, clamp &

batten not included.

Suitable for following locks: Additions H32306, H32331, Chubb 3U75, 3G114, ERA 196-62, 201-31, 201-32, 202-32, Additions 16260, 162631, 0100 307, 32471471-327, 571-327, 162672, 20131, 20132, 20132, 20232, 302-327, 302-327, 471-327, 571-327, 164ch, ES bed latch, Jewson LISJK072, LISJK100, Legge P3751, P1645, Travis Perkins P19, P20, P22 (802503), P29 (802510), P81, Union L99, Y2201, Y2294, Yale PM246, PM320 and PM550.

All prices are exclusive of VAT

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

Visit: www.trend-uk.com/downloads



LARGE LOCK JIG

For routing the faceplate and mortise for larger locks guickly & accurately.

- Suitable for DDA (Disability Discrimination Act) style locks. 20mm or 24mm x 235mm radius end face plate and 17mm x 170mm mortise.
- Adapter plate included to allow smaller templates (239mm x 60mm) to be fitted (as supplied with standard Lock Jig opposite).
- Suitable for doors 34mm to 58mm thick.
- An auger bit and drill is required to complete deep mortises.

Includes:

- **Guide Bush Collar**
- 2 x **Face Plate Templates**
- Mortise Template 1 x

Template Adapter 1 x

DOOR STAND Holds door on its edge while routing hinge recess & mortise for locks.

Holds door securely. Non-scratch base. Adjustable clamp for doors 32mm to 55mm thick.

Compatibility

See pages 198-199 or go to www.trend-uk.com/compatibility

£117.00

OCK/JIG/A

- Allows door to be tilted back to assist fitting into frame.
- Maximum door weight 50kg.

D/STAND/A

£36.00 **PIVOTS** Support for **Routing Hinges**

& Mortises

Support to Assist **Fitting Door to** Frame or Lining

24" CARRY CASE

for door hanging accessories

Accepts Door Stand, Lock Jig, Door Clamp & accessories.

CASE/DH £31.00

Size: 610mm x (24") x 200mm (8") x 200mm (8"). Tools and accessories not included.

- Made from hard wearing polyester.
- Padded inner layer to protect jigs.
- Velcro® straps to hold either Lock Jig or Large Lock Jig and Door Clamp.
- Full opening jaw for ease of access to contents.
- Carry strap and removeable shoulder strap.
- Sixteen pockets.
- Spirit level or Clamp Guide straps.





Optional Accessories:

DOOR CLAMP

Patent No. PCT/EP2006/006072

Holds door

and fitting

locks.

door stops.

damage.

£17.00

while drilling

No set-up time needed.

trend

Templates

LOCK JIG

MFV

WP-LOCK/T/SET _£45.00 Suitable Cutters Pack of 16 templates as supplied in standard Lock Jig. Comprises: faceplate templates 1-12 & mortise templates A-D. See opposite for details

Guide Bushes

GB30 (Standard 30mm) ___£6.50 GB160 (Special 16mm) ___£8.50

UNIBASE £14.50 Certain makes & models of router will require a Unibase to accept the guide bushes

3/75X1/2TC TR37X1/2TC C172X1/2TC	£32.50 £26.00 £18.50
12mm diameter x 115mm overall length. For up to 70mm deep mortise depending on plunge of router and use of Unibase etc.	
3/8LX1/4TC	£21.50

TR12X1/4TC £19.50 C019AX1/4TC £14.50 12mm diameter x 70mm overall length, Deepening of mortise with auger bit will be required.

NEW

ROUTER CARVER Patent No. US5 146 965

The Trend Router Carver system is a revolutionary routing concept that creates variable depth wood carvings with a plunge router.

- Carvings can be made on new or existing doors, frames and drawer fronts.
- The system comprises a unique engraving cutter housed in a conical bearing guide, used together with a set of templates and template frame.
- The templates have accurately shaped slots with varying widths which guide the cutter both horizontally and vertically to give authentic carvings.

The Cutters

The cutter consists of a 45° engraving 'V' groove TCT cutter, housed in an aluminium cone shaped bearing guide. The cutter depth is fully adjustable to

vary carving effect and allows for any variance after resharpening. The 8mm shank cutter must be used in a professional router with a base aperture of minimum 40mm. The 1/2" shank router cutter must be used with at least a 45mm diameter aperture. Always make trial cuts on a waste piece of material first

Description	Product Ref.	Price	
Router Carver Cutter:			
8mm shank	RCCX8MMTC	£49.50	
1/2" shank	RCCX1/2TC	£56.50	
12mm shank	RCCX12MMTC	£56.50	

Starter Sets

An economical way to purchase an initial Router Carver system. Each set includes a cutter, a HS frame and a classical handle nnlata

Description	Product Ref.	Price
Includes one:		
RCCX8MMTC		
RCT/HS/C		
RCF/HS	RC/SETX8MMTC+	£60.00
Includes one: RCCX1/2TC		
RCCX1/21C RCT/HS/C		
RCF/HS	RC/SETX1/2TC+	£66.50
Includes one:		
RCCX12MMTC		
RCT/HS/C		
RCF/HS	RC/SETX12MMTC+	£66.50

HOW TO ORDER

A typical order for the Royal door rail design:

- **1 x** Router Carver Cutter
- 1 x Template Set
- 1 x Frame to suit template

Further door rail templates can then be purchased and used with the frame.

Remember to include in your order the appropriate frames to fit your chosen Router Carver templates.

Compatibility See pages 198-199 or go to www.trend-uk.com/compatibility



1. Clamp template frame to component


2. Position template and follow the slots using the special cutter

3. Reposition template and rout again.

4 Finished carving

Corner Designs

These designs are for cabinet doors, picture frames, doors and as a crest carving on chests, bed-boards & signs.




Handle Surround Designs

The diverse range of handle surround designs allows for the utilisation of a variety of cabinet and drawer handles e.g. knobs, D pulls, ring pulls etc.

FRAME FOR HANDLE SURROUND DESIGN

Size External: 570 x 210mm Size Internal: 280 x 150mm

Approx. carving time: HS designs: 4 mins

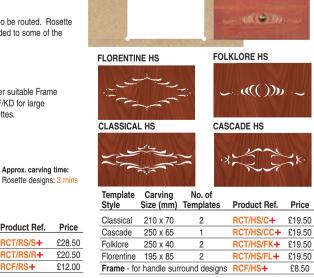





Template

Classical

Style

Royal


Roma

Template Carving No. of


Style	Dia. (mm)	Templates	Product Ref.	Price
Sunflower	85 & 68	2 & 2	RCT/RS/S+	£28.50
Rosepetal	79 & 62	1&1	RCT/RS/R+	£20.50
Frame - fo	r rosette des	signs	RCF/RS+	£12.00



To download Videos, Test Reviews, Spare Parts & Instruction Manuals Visit: www.trend-uk.com/downloads







RCF/KD+

Other suitable Frame RCF/KD for large rosettes

£15.00

	')"(`		
Carving Size (mm)	No. of Templates	Product Ref.	Price
440 x 185	2	RCT/KD/C+	£28.50
385 x 190	2	RCT/KD/R+	£28.50
375 x 200	1	RCT/KD/RM+	£23.00

Rosette Designs

FRAME FOR ROSETTE DESIGNS Size External: 300 x 150mm

Frame - for kitchen door designs

Fach pack enables two sizes of rosette to be routed. Bosette templates can be used separately or added to some of the standard designs.

ROSEPETAL RS

Large & small

Three styles of templates for kitchen doors. The Royal & Roma designs can also be enhanced by the addition of one of the two large sized rosette designs. FRAME FOR KITCHEN DOOR DESIGN Size External: 850 x 400mm Size Internal: 500 x 250mm

Kitchen Door Designs

PIVOT FRAME JIG SET

The Pivot Frame Jig Set is universal in nature and performs a number of valuable routing applications.



Beam Trammel: 8mm dia. x 500mm long rods min/max. 170/860mm Disc Cutting & Mini Pivot Trammel: Dia. with long 500mm rods min/max. 10/320mm

Optional Accessories: Long Fence Rods For Trend T3, T4, T5 & T5 MK2 - 8mm dia. x 500mm ROD/8X500 (pair) _ £16.00 **Packet of 8 Spacers** 3mm thick x 8mm bore.

PJ/1

£2.00





200mm



Diameter max.

- Converts to a beam trammel in seconds.
- Permits surface ski frame operations.
- Anti-tipping device for template routing.
- Cuts rings, scalloped designs & decorative patterns.

PFJ/SET/1 £64.00

For Trend T3, T4, T5, T5 MK2, Elu MOF 96(E) & DeWalt DW613, 614, 615, 620 & 621.

Includes:

- 2 x End Bars
- **4 x** Nylon Shoe Assembly
- 2 x Micro Adjustment Rods
- **Pivot Trammel Point** 1 x



Router not included


trend



Ski Frame

Anti-tip Frame

ROUTER COMPASSES

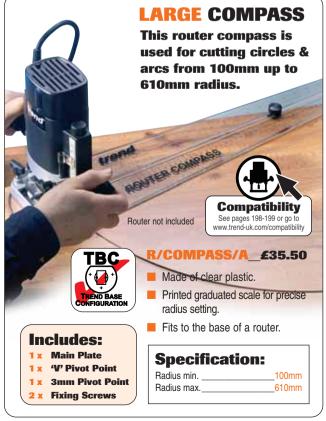

Compatibility See pages 198-199 or go to www.trend-uk.com/compatibility



Accessory: Rods N/COMPASS/AEX _£17.50 Threaded rods that extend the studded rods allowing an increase of 560mm (two pairs).

trend 135

ELLIPSE & CIRCLE **CUTTING JIG**

Designed to enable virtually any router to cut ellipses and circles.

- Used for corner tables, arches, desks and mirrors.
- Setting-up and operating is simple and effective, as proven by existing industrial users.
- A connector plate on the end of the bar fits directly onto the fence rods of Trend routers. For the fixing of other makes of routers, an accessory Adapter Base-Plate is required.
- By using one slide, the jig can be adapted for cutting circles.
- With additional extension bars, larger ellipses and circles can be cut.

Includes: 1 x Cross Frame

2 x Sliders



1 x Connector Plate



Optional Accessories: Extra Extension Bar

500mm long for extra large ellipses & circles ELLIPSE J/1 £22.50

Adapter Base Plate

For non-Trend routers state make & model ELLIPSE J/3 £23.00


MINI ELLIPSE & CIRCLE CUTTING JIG

The Mini Ellipse Jig is ideal for routing elliptical picture frames, mirrors, clocks and small coffee tables.

- Working on the same principle as the Ellipse Jig, the Mini Ellipse Jig, produced from plastic will cut much smaller ellipses.
- The main plate will accept most makes of small router for which screws are provided.
- By removing one slide and using a special pin, the jig can be used to accurately cut circles.
- For marking out prior to cutting, the plate can be fitted with a pencil plug. The jig is then turned into a drawing instrument.






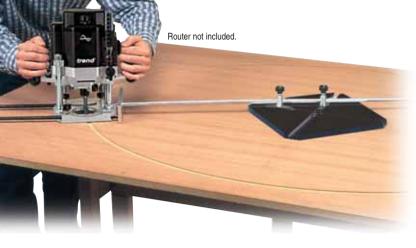

ELLIPSE J/A

£134.50

Round Table

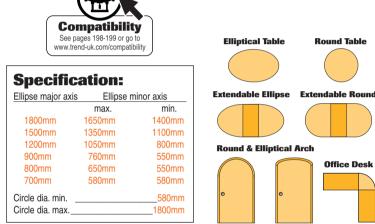

Office Desk





To download Videos, Test Reviews, Spare Parts & Instruction Manuals Visit: www.trend-uk.com/downloads



OFFSET BASE

This teardrop shaped base is fitted to the router and allows better control when edge moulding, by preventing router tilt.

- Large knob for greater control.
- Pre-drilled for Trend, Elu and DeWalt routers.
- Can be re-drilled by user to suit other makes of router.
- Made from clear plastic.

OFS/BASE Size: 280 x 180 x 8mm

Includes:

- **1 x** Teardrop Shaped Base
- **1 x** Knob Assembly
- **2 x** Fixing Screws



£23.50

OFFSET TRENCHING BASE

Ideal for housing cuts where oversize or undersize board is used.

- Allows wider grooves to be routed by simply rotating the base.
- Made from clear plastic.
- Pre-drilled for Trend, Elu and DeWalt routers.
- Can be re-drilled by user to suit other makes of router.
- The distance from the centre hole to the shortest edge is 100mm, subsequent edge distances are 101mm, 102mm, 103mm, 104mm and 105mm.

TEMP/OTB/A_£23.50

Size: 200 x 200 x 8mm Offset: 1.0mm



1 x Dual 1/4", 8mm Line-up Taper Pin 2 x Fixing Screws



BEAM TRAMMELS

For circle cutting with a router BEAM TRAMMEL BARS BE

Can be used with the majority of routers on the market. The bar fits into one of the holes for the router side fence. They have a pivot point which is adjustable in height.



£20.50

8mm rod dia. x 500mm.		
BEAM/002		
10mm rod dia. x 500mm.		

BEAM/001



0

0

+1mm

0

BEAM TRAMMEL

ATTACHMENT POINT

The point attaches to one of the routers fixed rods. The pivot point on BEAM/005 is adjustable in height and this trammel can be used on most 8mm rods. The BEAM/009 point is fixed and can only be used on the Trend T9, Metabo OF1612 and OFE1812, Felisatti TP246(E) and R346EC Routers.

BEAM/005 _

For 8mm dia. fence rods.	
BEAM/009+	
For 10mm dia. fence rods.	



Compatibility

R. Thirty

Replacement Part:

Spare Taper Pin

TEMP/OTR/PIN1

132

Router not included.

E4.00





£6.00

£8.50

VARIJIG FRAME SYSTEM

Adjustable frame and quide for use with a router.

- Adjustable frame for rectangles and squares.
- Allows a router to cut recesses, slots, face panel moulds etc.
- Four lengths of 700mm extrusion with dual metric/imperial measuring scales.
- Working area 600mm x 600mm.
- Includes router anti-tilt block.
- Cross cut accuracy to 0.1mm, a square is required to square frame before use
- Use with a guide bush with minimum 8mm spigot length, or use Unibase as guide.
- Secure with standard clamps or use optional clamp kit. See below.
- Can also be used to create panel doors for kitchens etc.

Includes:

- 4 x Alloy Extrusions with Scales
- 4 x Corner Brackets **Anti-tilt Shoe**
- **1 x** Anti-tilt Shoe Fixing Screw



Replacement Part: Frame Jointing Kit

£16.00 Set of four corner jointing brackets.

Router not included. Compatibility www.trend-uk.com/compatibi

ARIJIG £62.50

Optional Accessories: Clamp Kits £19.50 Pair of sliding friction clamps with 32mm clamping thickness. VIS/CK/I £29.50 Pair of sliding friction clamps with 51mm clamping thickness.

Recommended 30mm Guide Bush

GB30/A £7.00 With extra long 10mm spigot.

Unibase UNIBASE

Certain makes & models of router will require a Unibase to accept the quide bushes



Rectangles

Squares



Anti-tilt Shoe

VARIJIG 2540MM STRAIGHT GUIDE

For guiding routers, circular saws and jigsaws.

- Two lengths of extrusion with jointing piece to give maximum working length of 100" (2540mm). Reduced length for easier transport and storage.
- Clamps can slide along each extrusion.
- Maximum material clamping thickness 32mm.
- Adjustable friction washer on clamps prevent clamp from sliding too freely.
- One extrusion has dual metric/imperial scale.
- Can be combined with Varijig parts.

VJS/G/100 £48.00

Includes:

- 1 x 56" Alloy Extrusion with Scale
- 1 x 56" Allov Extrusion
- **1 x** Connecting Block
- **1 x** Hex Key 4mm 2 x Sliding Clamps

Replacement Parts:

Clamp Kit £19.50 Pair of sliding friction clamps. **Connecting Block Kit**

trend

JS/G/CB Jointing block for extrusions Saw not included.

NEW Accessory: Long Clamp Kit Pair of sliding friction clamps with 51.0mm (2") clamping thickness £29.50

VJS/CK/L (pair)



£10.00

THAG ACCESSORI

VARIJIG 900MM KITCHEN WORKTOP STRAIGHT GUIDE

trend

Ideal for breakfast bars.

- Straight line guide for routers, jigsaws and circular saws.
- Ideal for kitchen worktops.
- Soft pad adjustable friction clamps, which will clamp to thickness of 51mm (2").
- 900mm (35") working length extrusion is ideal for breakfast bars.

VJS/G/35 __£43.00

Includes:

1 x Alloy Extrusion with Seal 2 x Long Sliding Clamps

Router not included.

tren

NEW

Saw not included.

Compatibility

F

Router and clamps not included.

www.trend-uk.com/compati

VARIJIG TENON & GROOVING JI

Allows grooves and tenons to be cut using a router.

- Can be used to crosscut boards with a router or circular saw.
- Frame is adjustable to allow narrower or wider grooves to be routed. The max. adjustment is 70mm depending on the diameter of the router base.
- The edge of the frame can be used as a guide to trim a panel square using a router.
- Two sliding stops to set groove length.
- Squaring butt has the facility to accept a spelch block to allow a full-length groove. Fixing screws are included for this purpose.
- Working length is 400mm.
- Use with a router with a guide bush with a minimum 8mm projection fitted.

VJS/TG/JIG

£81.00

Includes:

- **4 x** Alloy Extrusions
- 4 x Corner Brackets 3 x Scales
- 1 x Squaring Butt
- 2 x Length Stops
- 1 x Hex Key

Optional Accessories:

F Clamps	
FC/200	£11.50
FC/300	£13.50
Quick action (two required).	





Crosscutting



Trenching/Grooving

trend[®] 139

ROUTER TEMPLATES

A range of clear plastic router templates, for use with any plunge router.





are uppercase block characters in Trend Vogue typeface. All letters and numbers are nominal 57mm high. A Unibase may be required for certain makes and models of router.

INLAY PATTERN TEMPLAT

Clear 6mm plastic inlay templates

auide bush.

TEMP/LN57X1/4




C011X1/4TC £8.50 Diameter 8mm

for use with inlay kit fitted to a plunge router. Inlay kit allows a shaped pocket and matching inlay patch to be routed easily with a router cutter to create perfect inlays. A Unibase may be required for certain makes and models of router. Clover Template TEMP/IN/CLO £8.50 Size: 163 x 163 x 6mm **Diamond Template** TEMP/IN/DIA _£8.50 Size: 185 x 132 x 6mm **Fish Template** TEMP/IN/FIS £8.50 Size: 171 x 126 x 6mm Fleur De Lys Template /IN/FDL £8.50 Size: 197 x 239 x 6mm **Heart Template Optional** £8.50 Accessory: Size: 177 x 160 x 6mm **Pig Template** Inlay Kit £8.50 For use with T5 and other Size: 188 x 148 x 6mm compatible routers. Comprises a 1/8" down cut spiral router cutter **Star Template** £8.50


Ref. S55/02LHX1/4STC, guide bush and inlay collar. By following a template and then removing the collar, an inlay pocket can be routed with matching inlay. A Unibase may be required for certain makes & models of router.

INLAY/KIT/A £19.50



£8.50

£8.50

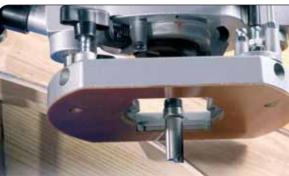

PANEL DOOR TEMPLATES

Clear plastic 6mm templates for use with a router and template profiling cutter to create a curved rail and panelled door. Two part templates for both the concave and convex cut, for the frame and panel. Seven different sizes of templates are available to suit various door widths. A Unibase may be required for certain makes and models of router.

D

D2

R

TEMP/PD/R/A	£13.50
Rad: 138mm Size: 223	
Door width possible 30	0 to 440mm)

TEMP/PD/R/B £11.00 Rad: 183mm Size: 275 x 207 x 102mm (Door width possible 370 to 420mm)

TEMP/PD/R/C £11.00 Rad: 222mm Size: 325 x 260 x 102mm (Door width possible 420 to 460mm)

TEMP/PD/R/D £11.00 Rad: 264mm Size: 376 x 310 x 102mm (Door width possible 470 to 510mm)

TEMP/PD/R/E £12.00 Rad: 316mm Size: 425 x 335 x 102mm (Door width possible 515 to 555mm)

TEMP/PD/R/F £12.00 Radius: 372mm Size: 470 x 398 x 102mm (Door width possible 565 to 600mm)

TEMP/PD/R/G £12.00 Radius: 400mm Size: 526 x 440 x 102mm (Door width possible 620 to 660mm)

Measurements shown are: Template Width (D) x Curve Width (D2) x Height. (measurements in brackets represents possible width of door)

W

D

Size: 146 x 139 x 6mm

Size: 182 x 220 x 6mm

Size: 137 x 135 x 6mm

Swan Template

FEMP/IN/SWA

Tulip Template

TEMP/IN/TUL



CORNER/HOLE TEMPLATE


A template to rout holes of various diameters and to put a concave or convex shape on the component. A template profiler cutter can be used to create holes of 25mm, 50mm, 75mm and 100mm in diameter. The template edge also includes concave and convex 50mm and 100mm radius profiles. A variety of other size holes and curves can be achieved by using a different combination of cutter and guide bush. A Unibase may be required for certain makes and models of router.

TEMP/COR/A Size: 290 x 290 x 8mm_

£35.50

CABLE TIDY INSERT TEMPLATE

A template that enables 60mm and 80mm round and 105mm x 55mm rectangular holes, to be routed in desks or any surface where cables need to be hidden. The holes will then accept a plastic cable tidy. The template can also be used to cut a 35mm blind hole for circular kitchen door hinges. A 30mm diameter guide bush and a 12mm diameter cutter are reguired. A Unibase may be required for certain makes and models of router.

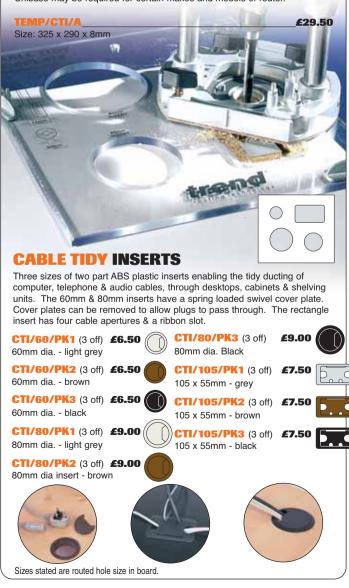



KIT TEMPLATE


A unique concept which allows oval pockets to be routed, to disguise ugly resin pockets and knots in timber. This is especially required when softwoods are being used. The template is supplied with a 10mm diameter 1/4" shank cutter, a 20mm template guide bush & a 40mm inlay collar. A Unibase may be required for certain makes & models of router. Patch size 120mm x 45mm

Replacemen	t Darte:	
-	l raits.	Before
Spare Guide Bush		
	£6.50	0
Diameter 20mm	· / / ·	-
Collar	C .	
GB/COLL/2040	£5.00	
		After
Router Cutters		
C016X1/4TC	£11.00	

FRAME & PLAQUE TEMPLATE SET

A seven piece template set that allows elliptical picture frames and plaques/plinths to be routed. Made from clear 8mm thick laser cut plastic. The four picture frame templates and three plaque templates are supplied with pinholes so that they can be secured to the component, or alternatively they can be secured with hot melt glue or double sided sticky tape. Use with a bearing guided 12.7mm diameter template profiler or laminate trimming router cutter, in a router table or portable use. Back of frame requires 12.7mm guided rebate cutter.

TEMP/PFP/A £27.50

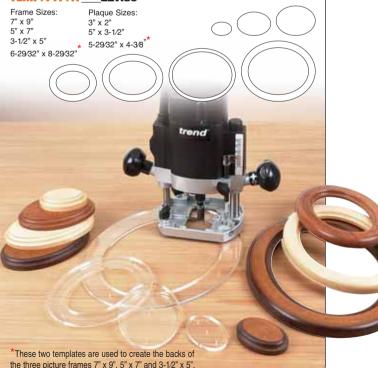

Measurements shown are: Length x Width x Thickness. Routers and cutters not included with all templates.



Compatibility


See pages 198-199 or go to www.trend-uk.com/compatibility

Router not included.

UNIBASE

The Unibase enables routers with non-standard auide bush fittinas to accept the range of Trend quide bushes. Will fit directly to most routers.

- Line-up pin used with a 16mm plastic bush to ensure concentricity of the cutter to the guide bush when fitting the sub-base.
- Suits collet sizes 1/4", 8mm, 12mm and 1/2".

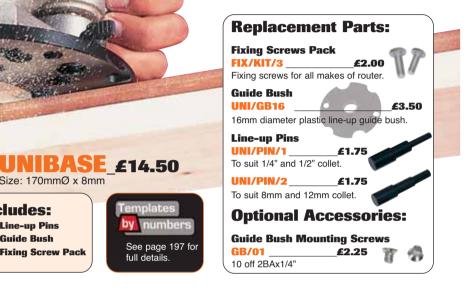

Cutter Template/Guide Bush Relationship:

This chart shows the offset which results from using a specific size of guide bush and cutter. This offset shown on the shaded areas should be calculated prior to producing a template. All the guide bushes will fit the UNIBASE, GB/5 and GB/PLATE sub-basessee opposite. As a rule allow 1.5mm to 2mm clearance between cutter and inside wall of auide bush.

$\backslash o \backslash$		GUIDE BUSH														
Olitsio DIA. CUTTER	Ref.	GB10	GB11	GB12	GB14	GB16	GB17	GB18	GB20	GB22	GB24	GB26	GB28	GB30	GB32	GB40
	mm	10 mm	11 mm	12 mm	14 mm	16 mm	17 mm	18 mm	20 mm	22 mm	24 mm	26 mm	28 mm	30 mm	32 mm	40 mm
7/64	3	3.5	4	4.5	5.5	6.5	7	7.5	8.5	9.5	10.5	11.5	12.5	13.5	14.5	18.5
1/8	3.2	-	3.9	4.4	5.4	6.4	6.9	7.4	8.4	9.4	10.4	11.4	12.4	13.4	14.4	18.4
5/32	4	-	3.5	4	5	6	6.5	7	8	9	10	11	12	13	14	18
3/16	4.8	-	-	3.6	4.6	5.6	6.1	6.6	7.6	8.6	9.6	10.6	11.6	12.6	13.6	17.6
13/64	5	-	-	3.5	4.5	5.5	6	6.5	7.5	8.5	9.5	10.5	11.5	12.5	13.5	17.5
7/32	5.5	-	-	-	4.2	5.2	5.8	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2	17.2
15/64	6	-		-	4	5	5.5	6	7	8	9	10	11	12	13	17
1/4	6.3	-		-	3.8	4.8	5.4	5.8	6.8	7.8	8.8	9.8	10.8	11.8	12.8	16.8
5/16	8	-	-	-	-	4	4.5	5	6	7	8	9	10	11	12	16
23/64	9	-	-	-	-	3.5	4	4.5	5.5	6.5	7.5	8.5	9.5	10.5	11.5	15.5
3/8	9.5	-	-	-	-	-	3.8	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	15.2
25/64	10	-		-	-	-	3.5	4	5	6	7	8	9	10	11	15
7/16	11	-		-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	9.5	10.5	14.5
15/32	12	-	-	-	-	-	-	-	4	5	6	7	8	9	10	14
1/2	12.7	-	-	-	-	-	-	-	3.6	4.6	5.6	6.6	7.6	8.6	9.6	13.6
-	13	-	-	-	-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	9.5	13.5
-	15	-		-	-	-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	12.5
5/8	16	-	-	-	-	-	-	-	-	-	4	5	6	7	8	12
-	18	-	-	-	-	-	-	-	-	-	-	4	5	6	7	11
23/32	18.2	-	-	-	-	-	-	-	-	-	-	3.9	4.9	5.9	6.9	10.9
3/4	19	-	-	-	-	-	-	-	-	-	-	3.5	4.5	5.5	6.5	10.5
-	20	-	-	-	-	-	-	-	-	-	-		4	5	6	10
7/8	22.2	-	-	-	-	-	-	-	-	-	-	-	-	3.9	4.9	8.9
1	25.4	-	-	-	-	-	-	-	-	-	-	-	-		-	7.3
1-1/8	28.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.7
1-1/4	31.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.1

Instructions For Fitting:

mplate


full details

The line-up pin fits into the collet and is plunged through the router base. The line-up bush is fitted into the UNIBASE and secured. This is then placed over the line-up pin and rotated in order to line up the fixing holes. The UNIBASE screws are tightened and then the line-up bush can be replaced with any choice of Trend guide bushes. These range from 10mm up to 32mm (GB10 - GB32). For larger diameter cutters a 40mm guide bush (GB40) is available. See opposite page.

Guide Bushes When Hand Routing:

Guide bushes are required when material has to be profiled or routed to a set pattern or shape.

In operation, a suitable guide bush is first mounted on the router base or sub-base. When choosing guide bush and cutter, make allowances for a minimum of 3.5mm between cutter and outside of bush. This ensures there is enough clearance to allow the waste to clear the guide bush.

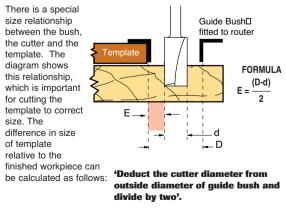

This difference is shown in the chart by the shaded area relative to the range of bushes and cutters available.



Size: 170mmØ x 8mm

Includes:

1 x


1 x

2 x Line-up Pins

Guide Bush

Fixing Screw Pack

GUIDE BUSHES



Router not included

EURO STYLE PLASTIC GUIDE BUSHES

- Made from durable plastic.
- Outside diameters from 10mm to 33mm.
- Fits directly to Trend T3, T4, T5, T5 MK2, T9, T10 & T11 and other routers with Trend guide bush fittings. Please see Compatibility Chart on pages 198-199.
- Will fit other makes when used with GB/5, GB/PLATE or UNIBASE.

GB/SET/1	£23.50
Plastic Guide Bush set of 12.	
10mm to 32mm in 2mm incre	ments.
GB/SET/2	£23.50
Plastic Guide Bush set of 12	Odd sizes 11mm

Plastic Guide Bush set of 12. Odd sizes 11m to 33mm in 2mm increments.

GB/SET/3 £23.50 Plastic Guide Bush set of 14. Imperial sizes 3/8" to 1-5/16" in 1/16" increments.



GUIDE BUSH COLLARS FOR INLAY WORK

Five sizes of aluminium collars to fit guide bushes. Enables single shaped templates to be used to cut perfectly matching pocket & inlay. Collars have integral rubber 'O' rings to ensure collar secures onto guide bush. Templates should be made with suitable sized corners for the collar being used. The correct diameter straight cutter as indicated should always be used. (Guide bush not included.)

not included.)	
GB/COLL/7914£5.00	
Fits to GB793 to give 14.3mm (9/16") OD.	
Use with 3.2mm (1/8") Ø cutter.	
GB/COLL/1630 £5.00	
Fits to GB16 to give 30mm OD.	
Use with 7mmØ cutter.	
GB/COLL/2040 £5.00	
Fits to GB20 to give 40mm OD.	
Use with 10mmØ cutter.	
Ose with forming catter.	
GB/COLL/25454£5.00	
Fits to GB254 to give 54mm OD.	
Use with 14.3mm (9/16") Ø cutter.	
GB/COLL/3054 £5.00	
Fits to GB30 to give 54mm OD.	
Use with 12mmØ cutter.	

EURO STYLE PRECISION STEEL GUIDE BUSHES

- Guide bushes to guide the router when using a template.
- Fits directly to Trend T3, T4, T5, T5 MK2, T10 & T11 and some other light duty routers. Please see compatibility chart on pages 198-199.
- Will fit other makes of router when used with GB/5, GB/PLATE or UNIBASE.

vv	III UD/J, (UNIDAGE.	
		 [:	<u>od —</u> :	1⊺P	
				ΠĽ	_
		⊬	ID →		
C	D	Ρ	ID	Product	
mm	inch	mm	mm	Ref.	Price
7.74	-	6	6.5	GB774	£6.50
7.93	(5/16")	5	4.8	GB793	£6.50
9.5	(3/8")	6	7.9	GB95	£6.50
10�	-	6	7	GB10	£6.50
10.8	-	6	8.8	GB108	£6.50
11	-	6	8	GB11	£6.50
11.1	(7/16")	6	9	GB111	£6.50
12�	-	6	9	GB12	£6.50
14�	-	6	11	GB14	£6.50
15.9	(5⁄8")	6	14.1	GB157	£6.50
16�	-	6	13	GB16	£6.50
17	-	6	14	GB17	£6.50
18�	-	6	15	GB18	£6.50
20�	-	6	17	GB20	£6.50
22�	-	6	19	GB22	£6.50
22.2	(7/8")	6	19.2	GB222	£6.50
23.8	(15⁄16")	6	20.8	GB238	£6.50
24�	-	6	21	GB24	£6.50
25.4	(1")	6	22.4	GB254	£6.50
26�	-	6	23	GB26	£6.50
27	(1-1/16")	6	24	GB27	£6.50
28�	-	6	25	GB28	£6.50
28.6	(1-1/8")	6	25.6	GB286	£6.50
30�	-	6	27	GB30	£6.50
30	-	10	27	GB30/A	£7.00
30.2	(1-3/16")	6	27.2	GB302	£6.50
31.8	(1-1/4")	6	28.8	GB318	£6.50
32�	-	6	29	GB32	£6.50
33.3	(1-5/16")	6	30.3	GB333	£6.50
40	-	6	37	GB40	£6.50

EURO STYLE GUIDE BUSH SETS

 M6x16mm (pack of 10)
 GB/02
 £1.75

 DeWalt DW613 Guide Bush
 Screw Set M5 bolt set (5 pairs)
 GB/03
 £1.75

Templates See page 197 for full details.

CIRCULAR SUB-BASE SET

Size: 170mm diameter x 8mm.

- Solid laminate.
- Accepts Trend Guide Bushes.
- Supplied with a line-up pin and bush.
- Ensures concentricity of cutter and guide bush.

Router Models	Product Ref.	Price
Dewalt DW620, 621, 624, 625E 629, Elu OF97(E), MOF131, 177(E), Bosch GOF 1600A, 1700ACE & Makita RP0910, 0111C & B&Q CLM2050R, 1250R >11/03	ΕΚ, GB/5	£21.00
Makita 3620, 3612BR, 3600B, Ryobi RE600N, R600N, RE601	GB/5/A	£24.00
Hitachi M12V, M12SA, TR12	GB/5/D	£24.00
Makita 3612C, 3612	GB/5/J	£24.00
Flex OFT 3121VV, 2926VV & Portercable 100, 690,		
693, 7529, 97529, 7518, 9290	GB/5/M	£24.00
B&Q CLM 1250R <11/03	GB/5/P	£24.00
Triton TRB001, MOF 001	GB/5/Q	£24.00
The GB/5/S can be supplied drilled for other makes and models. *Please see compatibility chart and state m		£24.00 en ordering.

SQUARE SUB-BASE SET Size: 290 x 197 x 8mm.

Saugra varian of CP/

Square version of G	8/5	
Router Models	Product Ref.	Price
Dewalt DW620, 621, 624, 6 629, Elu OF97(E), MOF131 177(E), Bosch GOF 1600A 1700ACE, Makita RP09101 0111C & B&Q CLM2050R,	, j	£25.50
The GB/PLATE/S can be suppl drilled for other makes and models.	GB/PLATE/S*	£29.00
*Please see compatibility chart and stat	e make and model wh	en ordering.



trend[®] 143

ROUTER TABLE ACCESSORIES



ROUTER TABLE INSERT

A large rigid router table insert plate for incorporation into user-made router tables.

- Thermoset phenolic plastic router plate.
- Two concentric snap-in rings.
- Three hole sizes of 98mm, 68mm & 32mm dia.
- Concentric rings and radial lines on underside for easy centring of router.
- Moulded with slight crown (0.8mm) for distortion free cuts.
- Corner clips to clamp to table underside.
- Can be mounted to 19mm tops with edge rebate of 6.35mm deep x 12.7mm wide.
- Will accept screw-on style guide bushes for use as a copy follower.

Includes:

2 x Concentric Rings 1 x Lead-on Pin



Overhead

Routing

Spelching Block

Facility

RTI/PLATE

Size: 306 x 229 x 9.9mm

Insert 32mm to 68mm

WP-RTI/01 £4.25

Replacement Parts:

£35.50

Concentric rings and radial lines on underside

Optional Accessory: Insert Plate Shield

מעבוריו ישראוברו אומיר אידי



A shield is available for use with the Router Table Insert Plate, when using guided cutters and no backfence

£12.00

Background picture shows inverted routing. Guard has been removed for clarity.

PUSHBLOCK NEW For scribing rails

on a router table.

- Plastic 8mm thick base board to ensure flatness.
- Safely holds rails for scribing cut for panel door routing.
- Sliding front stop with grip abrasive.
- Adjustable height toggle clamp.
- Spelch block fitting to prevent breakout.
- Max. component width 100mm, min. thickness 15mm, max. thickness 30mm.
- Facility to exchange handles to allow use with an overhead router for end cuts.

Not suitable for use with PSC/105 and PSC/107 router cutters.

NO-VOLT RELEASE SWITCH Trips power to the machine should the power

be momentarily cut off. The switch must be bolted directly to router table leg or a user made workboard. Protected green switch to prevent accidental start up. 2.5m plug cable and 0.5m socket cable.

NVRS/230V (13A 230v Plug. Max. 2000w at 13.5A) NVRS/115V (16A 115v Plug. Max. 1850w at 13.5A)

£45.00 £69.50

TRIGGER LOCK To lock trigger in 'on' position, when used in table mode with a No-Volt Release Switch fitted. **T9/LOCK+** (for T9) £6.00

T5MK2/LOCK (for T5 MK2)

PUSHSTICK

Rigid plastic safety pushstick for guiding small sections of timber over a router or saw table. Keeps operators hands away from the cutting tool. 420mm overall length. £4.50

PUSHSTICK/1



£3 50



Visit: www.trend-uk.com/downloads

To download Videos, Test Reviews, Spare Parts & Instruction Manuals

MITRE/1

£22.00

FEATHER BOARD Vertical or horizontal pressure guard.

Scribing

trend

Prevents the material from being thrown back by the cutter and holds the work down onto the table or against the back fence.

PRESSURE/1

£7.00

MITRE FENCES

For use with user made router tables, saw benches and band saws.


Plastic Body

Angles -60°, 0°, +60°. Scale pitch of 5°. Protractor body 102mm x 28mm high with metal bar 200mm x 17mm. Beech spelch block included.



£42.00

PUSHBLOCK/4



Protractor body 140mm x 48mm high with metal bar 300mm x 17mm. Spring loaded locater for 90° with 1° adjustable location centring scale.

£10.00

ROUTER ACCESSORIES

FINE HEIGHT ADJUSTERS

These fine height adjusters simply fit onto the router and allow fine adjustment of the cutter height. They are especially useful for accurate work such as when using a dovetail jig. They are invaluable when the router is held inverted in a router table.

FHA/001 £12.00 Trend T3, T5, T5 MK2 Axminster AW635R Challenge 1020W Champion CPR850 DeWalt DW613, 614, 615 DIY ER005 Draper R850V Einhell EOF 850SP, BOF 1050E Elu MOF 96(E) Ferm FBF-6E, 8E, 1050E Nutool NPT850,102, HP6, MNPC900 Powerbase 1020W Performance Power 1020W Perles OF808(E), OF2-808(E) Power Devil PDW5026, 5027 Power Base 1020W Silverline 762170, 783111, AT3305 Virutex FR78, 78C Wickes 900W Sealev SR1000 Osaki 1020W

FHA/002 £15.00 Trend T9 CMT CMT2E Metabo OF1612, OFE1812 Felisatti TP246(E), R346EC Fein RT1800

FHA/003 £20.50 Trend T10 Elu MOF 177(E), 131 DeWalt DW624, 625EK, 629, CMT CMT1E

FHA/005 £16.00 Elu OF97, DeWalt DW620, 621

FHA/007 £15.00 Black & Decker KW779, 780 & 800E Powermaster 710W Hilka 918007 Clark CRI

FHA/008 £20.50 Makita RP0190*, 1110*, 3612(C) *dust spout column needs to be removed

FHA/009 £11.50 Trend T4, Ferm FBF-850E



Fits to fence rods of T3 T5 T10 & T11 and gives extra support for relief carving.

SKI/SET/1 (pair) Size: 450mm x 25mm x 6mm £30.50



THREADED ADAPTOR

For M12x1.0mm threaded cutters.

CLT/ADP/127 (1/2" shank) CLT/ADP/12 (12mm shank)

£9.00 £10.00



FHA/002

COLLET EXTENSIONS For use in router tables where there is a

limited router cutters shank length available. Precision machined one-piece steel body

12MM & 1/2" SHANK

With either a 1/2" or 12mm shank, fitted with a multi-slit spring steel collet and collet nut. Use at maximum speed 18,000rpm. Increases cutter spindle length by 50mm. Maximum tool diameter 50mm. Max tool cut length 30mm. Requires 19mm & 22mm A/F spanners.

8MM SHANK

CE/CNS/8 £33.50 Collet & nut set 8mm CE/CNS/95 £33.50 Collet & nut set 9.5mm CE/CNS/12 £33.50 Collet & nut set 12mm CE/CNS/127 £33.50 Collet & nut set 1/2" **CE/NUT** £8.50 Spare collet nut

> To download Test Reviews Visit www.trend-uk.com



COLLET EXTENSION SPANNERS

High quality forged vanadium steel open ended spanners for use with collet extensions.

For 1/2" collet ext. CE/127 SPAN/19	£4.50	For 1/4"
19mm A/F spanner	_24.30	12mm /
SPAN/22	£5.00	SPAN
22mm A/F spanner		17mm /

or 1/4" & 8mm collet ext	. CE/8
PAN/12	£3.50
2mm A/F spanner	
PAN/17	£4.25
7mm A/F spanner	

FIXING KITS For fitting routers to self-made router tables

& accessories -27



Pan Head Cou Screw pack of pan Scre head screws coun comprisina: screv M4x10mm M4x[·] 4 off M4x12mm M5x10mm 4 off M5x16mm 4 off M6x10mm M5x20mm M6x12mm 2 off M6x16mm 3 off M6x16mm M6x30mm M6x25mm 3 off UNF10x1/2" 3 off M6x35mm M6 nut & washer 3 off M6 nut & washer 3 off

127	8	
41		Uı So
intersii w pack c ntersink h ws comp	of ead	Sc 2 E M4 M4 M5
12mm 10mm	3 off 4 off	ME

2 off

3 off

2 off

3 off

3 off

Z4.23

_£17.00

£17.00

£6.00

nibase Fixing crew Pack

Screw pack comprising	of:
2 BAx1/4" Countersink	2 off
M4x10mm pan head	4 off
M4x12mm pan head	4 off
M5x16mm pan head	4 off
M5x20mm pan head	2 off
M6x12mm pan head	2 off
M6x16mm pan head	3 off
M6x30mm pan head	3 off
No10 UNFx1/2" pan head	3 off
M6 washer	3 off
M5 nut	2 off
M6 nut	3 off
FIX/KIT/3 £2	2.00

trend° 145

FIX/KIT/2 £1.50 FIX/KIT/3_ FIX/KIT/1 £1.50

ROUTER & CUTTER STORAGE

14" ROUTER IFW **TILITY BAG**

Purpose designed tool bag for router and tools.

- Accepts router power tool and accessories.
- Tough hardwearing polyester.
- Padded inner base, reinforced grip handle and shoulder strap.
- Exterior end pockets with Velcro[®] closing for router accessories.





Padded interior

CASE/UBR £31.00

Pocket for side-fence

Size: 360mm (14") x 375mm (15") x 305mm (12")



Side pockets for tools

Router, tools and

accessories not included.

Movable partitions

Removable pouch with belt loop

UTTER RACKS

Adjustable position cutter storage rack for twelve router cutters. Two sizes available for either 1/4" or 1/2" shank tools. Made from durable highimpact plastic. Stores cutters safely and securely by simply twisting the lever. There are two hanging holes for wall mounting or they can be screwed to a shelf or inside a drawer.

CS/RACK/635 £7.00

Size: 381 x 30 x 20mm

CS/RACK/127 £7.00 Size: 381 x 30 x 20mm

Tools and accessories not included

STORAGE CASES

For cutters & accessories

Storage cases have foam base with cut-outs (except Ref. CASE/5) to store the cutters. The lid is lined with softer foam to ensure the cutters stay in position. Large cases have a box for spare parts and a water bottle included. Ref. CASE/5 has a foam base with no cut-outs

Small Case Size: 330 x 95 x 45mm

CASE/1

For Craft Range with twelve 1/4" shank cutters.

Large Cases Size: 350 x 250 x 50mm

CASE/4 £29.00 For Professional Range cutters with twelve 1/4" and eight 1/2" shanks, slotter sets, collets and 4" diamond stone.

CASE/5

base.

£28.50

£19.00

For Professional Range with no cut-outs in foam

Cutters not

included.

CUTTER TRAY

A 400 hole storage tray for the safe transport and storage of router cutters. Made from hard wearing nylon plastic, this storage tray holds cutters safely and securely when not in use. There are one hundred of each of the four sizes of holes; 1/4", 8mm, 3/8" and 1/2". All hole sizes are fractionally oversize to allow the easy removal of the cutter.

CS/TRAY/A £12.00 Size: 302 x 302 x 16mm

Cutters not included

STORAGE CASES For Trend Routers

Four sizes of blow moulded storage cases for safely transporting and storing Trend T4, T5, T5 MK2, T9, T10 & T11 routers. Ideal for storage of a router on-site or in the workshop.

Trend T4 Router Case CASE/T4

Size: 415 x 290 x 140mm £11.25

Trend T5/T5 MK2 Router Case CASE/T5

Size: 470 x 357 x 165mm

Trend T10 & T11 Router Case CASE/T10

Size: 390 x 295 x 240mm

Measurements shown are: Length x Width x Depth





AG ACCESSORI

DEPTH GAUGE

Patent No. GB2386085 US Patent Application 10/784,780


Metal rule depth gauge to help set the height of router cutters and sawblades with greater accuracy.

renc

- Horizontal & vertical measuring.
- For hand routers, router tables and saw benches.
- 60mm wide aperture & accurate to 0.5mm.
- 80mm measurement range.
- U section plastic injection moulding with unique cam lever lock.
- Steel rule dual metric & imperial scale.
- Self standing for setting cutter depth on routers tables and low profile for backfence adjustment.



ORGANISERS

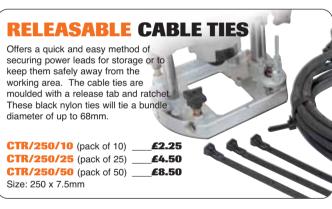

CD RACK ORGANISER

Three piece pack that can be fitted into a user made unit to accept 24 single CD cases, or 22 single with 1 double disc case. Black plastic with spring loaded



MAGNET PACK

These magnets are nickel plated and incredibly strong making them ideal for a variety of workshop applications with endless possibilities.

MAG/PACK/2_£6.00

Pack of four magnets Size: 10 x 3mm

MAG/PACK/1 £7.00 Pack of four magnets Size: 15 x 3mm

DVD RACK ORGANISER

Four piece pack that can be fitted into a user made unit to accept 15 single DVD cases. Black plastic with spring loaded push lock and release.

DVD/RACK/1 _£5.50 Size of rack: 320 x 8 x 155mm. Internal width of unit must be 200mm







NEW

All prices are exclusive of VAT

No.0

BSC/0/100

BSC/0/1000

(qty. 100)

(qty. 1000)

No.10

No.20

JOINTING ACCESSORIES

WOODEN BISCUITS

Biscuit jointing has proven to be one of the strongest, fastest, safest and most accurate ways to join hard and soft woods, plywood, composition board etc. Compared to doweling, biscuit jointing is faster and more precise. The biscuits are made of die cut beech. Beechwood biscuits expand when in contact with a woodworking adhesive e.g. PVA glue.

£4.75

£22.00

£4.75

£23.00

£5.25

£24.00

METAL ENDED WORKTOP

Panel bolt connectors to connect worktop

joint together. 150mm overall length.

For board thickness 8 - 12mm

For board thickness 13 - 18mm

19mm+ Size: 60 x 23 x 4.0mm

CONNECTORS

PC/10/M (pack of 10)

PC/50/M (pack of 50)

PC/100/M (pack of 100)

PC/1000/M (pack of 1000)

Size: 53 x 19 x 4.0mm **BSC/10/100** (qty. 100)

BSC/10/1000 (qty. 1000)

For board thickness

BSC/20/100

BSC/20/1000

(qty. 100)_

(qty. 1000)

Size: 47.5 x 15.5 x 4.0mm



No.0, 10 & 20 Qty No.0 x 30, No.10 x 30 & No.20 x 40 BSC/MIX/100 (qty. 100) _____€5.25

Qty No.0 x 250, No.10 x 250 &

No.20 x 500 BSC/MIX/1000 (qty. 1000)

_____£23.00



BISCUIT JOINTER See page 110 for full details.

Ref. ____**T20K** For biscuit jointing cutters see pages 61 & 94 for full details.

£7.50

£32.50

£59.00

£521.50

WO	ODE	ND	OWELS		100000
pins. S chipboa panels of cabin doors. the dow gluing	rooved p Buitable f ard and in the pr net carca The gro vels allo up. Thre ers avail	or joini MDF roductio asses a oves in w for e	ng on and		
D mm	OL mm	Qty	Product Ref.	Price	
-		Qty 50		Price £1.75	
mm 6.0 6.0	mm 30.0 30.0	50 500	Ref. DWL/1/50 DWL/1/500	£1.75	
mm 6.0 6.0 8.0	mm 30.0 30.0 30.0	50 500 50	Ref. DWL/1/50 DWL/1/500 DWL/2/50	£1.75 £12.00 £1.75	Acces
mm 6.0 6.0 8.0 8.0	mm 30.0 30.0 30.0 30.0 30.0	50 500 50 500	Ref. DWL/1/50 DWL/1/500 DWL/2/50 DWL/2/500	£1.75 £12.00 £1.75 £14.50	ACOL
mm 6.0 6.0 8.0 8.0 8.0	mm 30.0 30.0 30.0 30.0 30.0 40.0	50 500 50 500 500 50	Ref. DWL/1/50 DWL/1/500 DWL/2/500 DWL/2/500 DWL/3/50	£1.75 £12.00 £1.75 £14.50 £1.75	Acet
mm 6.0 6.0 8.0 8.0 8.0 8.0 8.0	mm 30.0 30.0 30.0 30.0 40.0 40.0	50 500 50 500 500 500	Ref. DWL/1/50 DWL/1/500 DWL/2/500 DWL/2/500 DWL/3/500 DWL/3/500	£1.75 £12.00 £1.75 £14.50 £1.75 £17.50	Acre
mm 6.0 6.0 8.0 8.0 8.0 8.0 8.0 10.0	mm 30.0 30.0 30.0 30.0 40.0 40.0 35.0	50 500 50 500 500 500 500 500	Ref. DWL/1/50 DWL/1/500 DWL/2/500 DWL/2/500 DWL/3/500 DWL/3/500 DWL/4/50	£1.75 £12.00 £1.75 £14.50 £1.75 £17.50 £2.25	Acce
mm 6.0 6.0 8.0 8.0 8.0 8.0 10.0 10.0	mm 30.0 30.0 30.0 30.0 40.0 40.0 35.0 35.0	50 500 500 500 500 500 500 500	Ref. DWL/1/50 DWL/1/500 DWL/2/500 DWL/2/500 DWL/3/500 DWL/3/500 DWL/4/50 DWL/4/500	£1.75 £12.00 £1.75 £14.50 £1.75 £17.50 £2.25 £20.50	ACCE TO A STATE OF THE STATE OF
mm 6.0 6.0 8.0 8.0 8.0 8.0 8.0 10.0	mm 30.0 30.0 30.0 30.0 40.0 40.0 35.0	50 500 50 500 500 500 500 500	Ref. DWL/1/50 DWL/1/500 DWL/2/500 DWL/2/500 DWL/3/500 DWL/3/500 DWL/4/50	£1.75 £12.00 £1.75 £14.50 £1.75 £17.50 £2.25 £20.50 £3.00	ACCES IN A STATE OF A

HAND MITRE SHEARS

Chrome vanadium shears. For perfect mitre cuts of mouldings, beadings and weatherseals. Can be used on mouldings up to 10mm thick. Ideal for use with delicate dolls house mouldings.

HM/SHEAR£39.00Spare blade for shears£12.50Spare alloy wing for shears£12.50HMS/2£12.50




WEATHERSEALS

AQUAMAC[®] 63 STRIP

Aquamac[®] 63 strip is fitted into the window frame aperture using four cut lengths.

Groove created by **Refs. 331 & 330**. See page 66.

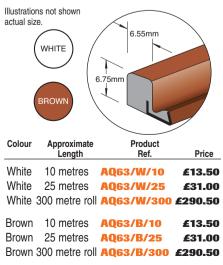

AQUAMAC[®] 21 STRIP

Aquamac[®] 21 strip is fitted into the door frame rebate (head and jambs) as three cut pieces forming a compression or wiping seal.


Groove created by Ref. 334. See page 66.



Brown 250 metre roll AQ21/B/250 £414.00

ROUTASEAL STRIP

High grade silicon rubber weatherseal. Will stand temperature of -30° to +200°C. Groove created by **Ref. 31/10L.** See page 67.



Colour	Approximate Length	Product Ref.	Price
White White White	10 metres	RS/W/5 RS/W/10 RS/W/25	£13.00 £25.00 £61.50
Brown Brown Brown	5 metres 10 metres		£13.00 £25.00 £61.50



ROUTING ACCESSORIES

trend 149

JIGMAKING ACCESSORIES

For woo		THREAD	And a second	DR JIG MAK	ING	-	Description	Hole Size	Thread Size	l Hex K	(ey Qt	Product v Ref.	Price
Kei.	N3/W		nserts for fixings in n-made boards ar			6	For wood	9mm	M6	6mr			£3.50
		e.g. MDF.	In-made boards ar				For wood	9mm	M6	6mr		0 INS/W6/50	
For hard		Threaded in	nserts have enlarg	ed flange end	Undersid s shown	le	For wood	11mm	M8	8mr			
e.g. Tufno Ref. IN			them from 'pulling	out' after			For wood	11mm	M8	8mr			
		continual us	sage.				For plastic	8mm	M6	-	1(£4.00
WHAT SE			need to be locate	ed from the			For Plastic For Plastic	8mm 9.5mm	M6 M8	-	50 10		£15.50 £6.00
See in		underneath	I.			-	For Plastic	9.5mm	M8	-	50		£25.50
A		PRONGE	D TEENUTS				8mmØ drill hole		M6	-	1(£4.00
	XK.		eliable and easy to	fix low	mine	1	8mmØ drill hole		M6	-	50		£14.00
	the of	cost anchor	r for wood and fibr	e board.	(2)		10mmØ drill hol		M8	-	1(£4.50
	1		ert into a pre-drilled er gently into place		-	1	10mmØ drill hol		M8	-	50		£16.00
	e sizes	and namine	or gently into place	A STORE	~		12mmØ drill hol		M10	-	10		£5.00
		N.M.	State State		Inderside shown	20	12mmØ drill hol	е -	M10	-	50	D PTN/10/50	19.50
				н а то — ен			т	hread		н	D	Product	
avy Duty:		4			Ţ				Qty	mm	mm	Ref.	Price
					Ĩ.		Male M6		4	15	32	KB1/M/6	£6.00
r 📂 r				nale		1	Male M8		4	17	40	KB2/M/8	£13.00
	╓╷		BE KNOBS	₩ No beo ot!	hud fam-1		Female M6 Female M8		4 4	15 17	32 40	KB3/F/6 KB4/F/8	£6.50 £13.50
Female	₩ '		forced plastic. Ma brass insert. Suita										
OCKING KEYS	1		ping action is requ		long		Male M6 Male M8		2 2	23 27	32 40	KB5/M/6 KB6/M/8	£4.00 £4.50
Reinforced plastic. Male				/	•	(2)	Male M10		2	32	40 50	KB7/M/10	£4.50 £6.50
steel stud, female has b insert. Ideal for locking					20*	2	Female M6	-	2	23	32	KB8/F/6	£4.00
plates and bars.	onung			î.			Female M8		2	27	40	KB9/F/8	£4.50
Contraction of the local division of the loc	102	Ma	ale Female	, Ų			Female M10	-	2	32	50	KB10/F/10	£6.50
Contract of the second		(3) ADJ	USTABLE LEV	ERS			Male M6		1	28	42	KB11/M/6	£4.50
1		<u> </u>	forced plastic lift a		et system.		Male M8		1	36	63	KB12/M/8	£5.00
(A)	-		e has steel stud, fe			୍	Male M10 Male M12		1 1	45 54	80 80	KB13/M/10 KB25/M/12	£7.00 £9.50
		Suite	able when lever tu	rning angle is		(3)	Female M6	-	1	28	42	KB14/F/6	£4.00
		(4) CLA	мр кнов 🥻		┍╾┉╼┥ ┍──┐Ţ		Female M8	-	1	36	63	KB15/F/8	£5.00
		Clarr	nping knob with		· + · - ·	₽	Female M10	-	1	45	80	KB16/F/10	£6.50
0			for clamping			U	Female M12	-	1	65	100	KB26/F/12	£8.50
		appii	ications.	Male		(Λ)	Male M10	35	2	32	32	KB27/M/10X3	C10 00
						(4)	maio mito		L		02		5210.00
						4			L	02	0L		5210.00
ghter Duty:			size knobs availab			4	Thread	Thread Length	Qty	H	Dmm	Product Ref.	Price
ghter Duty:	offering	g excellent va	alue for money. T	he knobs are r	nade		Thread	Thread Length	Qty	H mm	D mm	Product Ref.	Price
	offering from re	excellent va	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1		Thread		H	D	Product	Price £5.00
	offering from re	g excellent va	alue for money. T stic and have a ste	he knobs are r	nade ud.		Thread Male M6	Thread Length 20	Qty 10	H mm 14	D mm 31	Product Ref. CR/KB/PK1	Price
	offering from re	excellent va	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1	Thread Male M6 Male M6 Male M8 Male M6	Thread Length 20 15	Qty 10 10 10 4	H mm 14 20 27 31	D mm 31 30	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK8	Price £5.00 £7.50 £8.00 £6.50
ighter Duty: LOCKING KEYS	offering from re	excellent va	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1 2	Thread Male M6 Male M6 Male M8 Male M6 Male M6	Thread Length 20 15 36 15 30	Qty 10 10 10 4 4	H mm 14 20 27 31 31	D mm 31 30 40 43 42	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK8 CR/KB/PK4	Price £5.00 £7.50 £8.00 £6.50 £6.50
	offering from re	excellent va	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1	Thread Male M6 Male M6 Male M8 Male M6 Male M6 Female M6	Thread Length 20 15 36 15 30 -	Qty 10 10 10 4 4 4 4	H mm 14 20 27 31 31 31 31	D mm 31 30 40 43 42 43	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50
	offering from re 2 LOB	excellent va	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1 2	Thread Male M6 Male M6 Male M8 Male M6 Male M6 Female M6 Female M8	Thread Length 20 15 36 15 30 - -	Qty 10 10 10 4 4	H mm 14 20 27 31 31 31 31 38	D mm 31 30 40 43 42 43 66	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £6.50 £7.50
DCKING KEYS	offering from re 2 LOB	e excellent va einforced plas E KNOBS	alue for money. T stic and have a ste	he knobs are r eel insert or stu	nade ud.	1 2	Thread Male M6 Male M6 Male M8 Male M6 Male M6 Female M6	Thread Length 20 15 36 15 30 -	Qty 10 10 10 4 4 4 4 4	H mm 14 20 27 31 31 31 31	D mm 31 30 40 43 42 43	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50
OCKING KEYS	offering from re 2 LOB	e excellent va einforced plas E KNOBS	alue for money. T stic and have a ste	he knobs are r eel insert or stu ISTABLE LE	nade ud. VERS	1 2	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8	Thread Length 20 15 36 15 30 - - 35	Qty 10 10 10 4 4 4 4 4 4 4 4	H mm 14 20 27 31 31 31 31 38 40	D mm 31 30 40 43 42 43 66 66	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
DCKING KEYS	offering from re 2 LOB	g excellent va inforced plas E KNOBS Male	alue for money. T stic and have a ste ③ ADJU	he knobs are r eel insert or stu ISTABLE LE Male	nade Jd. VERS Female	1 2 3	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8	Thread Length 20 15 36 15 30 - - 35 - 35 -	Qty 10 10 10 4 4 4 4 4 4 4 4	H mm 14 20 27 31 31 31 31 38 40	D mm 31 30 40 43 42 43 66 66	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
CKING KEYS	offering from re 2 LOB	g excellent va inforced plas E KNOBS Male	alue for money. T stic and have a ste ③ ADJU FLEXIBLE ME Use for jig makir	he knobs are r eel insert or stu ISTABLE LE Male ABURING 1 ng & building in	nade Jd. VERS Female	1) ② ③	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to ho	Qty 10 10 4 4 4 4 4 4 4 0 d wor	H mm 14 20 27 31 31 31 31 38 40 62	D mm 31 30 40 43 42 43 66 66 83 83	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
CKING KEYS	offering from re 2 LOBI SIDED 1 tempora can be re	g excellent va inforced plas E KNOBS Male	alue for money. T stic and have a ste ③ ADJU	he knobs are r eel insert or stu ISTABLE LE Male ABURING 1 ng & building in	nade Jd. VERS Female	 (1) (2) (3) (3) (4) (5) (5) (6) (7) (7)	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to ho orking are	Qty 10 10 4 4 4 4 4 4 4 4 4 4 4 4 4 4 5 6 6 7	H mm 14 20 27 31 31 31 31 31 38 40 62	D mm 31 30 40 43 42 43 66 66 83 83	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
DCKING KEYS	offering from re 2 LOB SIDED tempora can be re umb.	g excellent va inforced plas E KNOBS Male TAPE ary fixing emoved	alue for money. T stic and have a ste 3 ADJU FLEXIBLE ME Use for jig makir purpose made n	he knobs are r eel insert or stu ISTABLE LE Male ABURING 1 ng & building in	nade Jd. VERS Female	1 2 3 1 7 0 0 b Fit	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to ho orking are	Qty 10 10 4 4 4 4 4 4 4 4 4 4 4 4 4 4 5 6 6 7	H mm 14 20 27 31 31 31 31 31 38 40 62	D mm 31 30 40 43 42 43 66 66 83 83	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	offering from re 2 LOB 2 LOB 5	g excellent va inforced plas E KNOBS Male TAPE ary fixing emoved	alue for money. T stic and have a ste 3 ADJU FLEXIBLE ME Use for jig makir purpose made n	he knobs are r eel insert or stu ISTABLE LE Male ASURING I ng & building in acchinery,	nade Jd. VERS Female	1 2 3 V To ob Fit	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with	Thread Length 20 15 36 15 30 - 35 - SEAL bed to he orking are adhesing	Qty 10 10 10 4 4 4 4 4 4 4 4 0 0 0 0 0 0 0	H mm 14 20 27 31 31 31 31 31 38 40 62 rkpiece ssentia Rou	D mm 31 30 40 43 42 43 66 66 83 83 85 secu I. Ind st	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK4 CR/KB/PK5 CR/KB/PK5 CR/KB/PK6 CR/KB/PK7	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
CKING KEYS Male DOUBLE S Ideal where is required, with your the	offering from re 2 LOB 2 LOB 5	g excellent va inforced plas E KNOBS Male TAPE ary fixing emoved	alue for money. The stic and have a stee 3 ADJU	he knobs are r bel insert or stu ISTABLE LE Male ASURING 1 ng & building in achinery, 2.00	nade Jd. VERS Female	1 2 3 Vi To ob Fii Su	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to he orking are adhesin	Qty 10 10 10 4 4 4 4 4 6 001d woo 01a is es	H mm 14 20 27 31 31 31 31 33 40 62 expension 62 expension 62 expension 80 WBS	D mm 31 30 40 43 42 43 66 66 83 83 85 secu 1.	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK4 CR/KB/PK5 CR/KB/PK5 CR/KB/PK6 CR/KB/PK7	Price £5.00 £7.50 £8.00 £6.50 £6.50 £6.50 £7.50 £7.50
CKING KEYS	offering from re 2 LOB 2 LOB 5	g excellent va inforced plas E KNOBS Male TAPE ary fixing emoved	alue for money. T stic and have a ste 3 ADJU FLEXIBLE ME Use for jig makin purpose made n tables etc. MT/1£2	he knobs are r bel insert or stu ISTABLE LE Male ASURING 1 ng & building in achinery, 2.00	nade Jd. VERS Female	1 2 3 Vi To ob Fii Su	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with urface 3\$/15X50	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to he orking are adhesin	Qty 10 10 10 4 4 4 4 4 6 001d woo 01a is es	H mm 14 20 27 31 31 31 31 33 40 62 expension 62 expension 62 expension 80 WBS	D mm 31 30 40 43 42 43 66 66 83 83 85 secu 1.	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK4 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, of with your the DS/TAPE	offering from re 2 LOBI 2 LOBI 5 LODI 5 LODI	excellent va inforced plas E KNOBS Male Male TAPE ury fixing emoved £8.50	alue for money. T stic and have a ste 3 ADJU FLEXIBLE ME Use for jig makin purpose made n tables etc. MT/1£2	he knobs are r eel insert or stu ISTABLE LE Male ASURING 1 ng & building in nachinery, 2.00 m	nade ud. VERS Female	1 2 3 V/ To ob Fili Siz	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with urface 3\$/15X50	Thread Length 20 15 36 15 30 - 35 - SEAL bed to he orking are adhesin x 1.5mm	Qty 10 10 10 4 5 6 9.000	H mm 14 20 27 31 31 31 31 38 40 62	D mm 31 30 40 43 42 43 66 66 83 83 85 secu 1.	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK4 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	offering from re 2 LOBI 2 LOBI 3 LOBI 4 Constant 4 Constant 1 Constant 1 Constant 1 Constant 1 Constant 1 Cons	A excellent va inforced plas E KNOBS Male Male TAPE ury fixing emoved £8.50	alue for money. The stic and have a steril store and a steril store for jig making purpose made in tables etc. MT/1	he knobs are r bel insert or stu ISTABLE LE Male Asuring in achinery, 2.00 m	nade ud. VERS Female	(1) (2) (3) To ob Fla Siz Siz RYL	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with urface BS/15X50 re: 15mm x 50m C TEMPLAT sheets of clear a	Thread Length 20 15 36 15 30 - - - SEAL bed to he orking are adhesin at x 1.5mn	Qty 10 10 10 4 5 6 10 10 10 10 10 10 10 10 10 10	H mm 14 20 27 31 31 31 31 38 40 62 crkpiece ssentia Rou VBS Size:	D mm 31 30 40 43 42 43 66 66 83 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	offering from re 2 LOBI 2 LOBI 3 SIDED 1 tempora can be re umb. x 50m 5 SO MM For	A excellent va inforced plas E KNOBS Male Male TAPE ury fixing emoved £8.50	Alue for money. The stic and have a stee 3 ADJU 3 ADJU 3 ADJU 4 A	he knobs are r bel insert or stu ISTABLE LE Male ASURING 1 ng & building in nachinery, 2.00 m TE eds, jigs and	nade Jd. VERS Female	1 2 3 VI VI Siz Siz RYL are s whe	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with wiface S/15X50 te: 15mm x 50n 	Thread Length 20 15 36 15 30 -	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK2 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	offering from re 2 LOB 2 LOB 3 LOB 3 LOB 3 LOB 4 SO 3 LOB 4 SO 4 SO 3 SO 3 SO 3 SO 3 SO 5 SO 5 SO 5 SO 5 SO 5 SO 5 SO	y excellent va inforced plas E KNOBS Male TAPE ry fixing emoved £8.50	alue for money. T stic and have a ste ③ ADJU FLEXIBLE ME Use for jig makin purpose made n tables etc. MT/1£2 Size: 16mm x 1r INATE TEMPLA aminate can be can	he knobs are r eel insert or stu ISTABLE LE Male Asuring 1 ing & building in nachinery, 2.00 m TE eds, jigs and ut and	nade Jd. VERS Female	1 2 3 VI VI Siz Siz RYL are s whe	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with urface BS/15X50 re: 15mm x 50m C TEMPLAT sheets of clear a	Thread Length 20 15 36 15 30 -	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	sidential sident	A excellent va inforced plas E KNOBS Male Male TAPE uy fixing emoved £8.50	Alue for money. The stic and have a stee and have a stee as a stee	he knobs are r bel insert or stu ISTABLE LE Male Asuring the building in hachinery, 2.00 m TE eds, jigs and ut and s or cutters.	nade ud. VERS Female	1 2 3 V/ To ob Fil Siz Siz Siz Siz Siz	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with wiface S/15X50 te: 15mm x 50n 	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to ho orking are adhesin £1 n x 1.5mn FE MATI acrylic in t ates and be	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
OCKING KEYS Male DOUBLE S Ideal where is required, of with your the DS/TAPE	sided and a second seco	A excellent va inforced plas E KNOBS Male Male TAPE uy fixing emoved £8.50	Alue for money. The stic and have a stering and have a stering additional additionadditional additional addite additional additional addite add	he knobs are r eel insert or stu ISTABLE LE Male Asuring 1 ing & building in nachinery, 2.00 m TE eds, jigs and ut and	nade ud. VERS Female	1 2 3 V/ To ob Fil Siz Siz Siz Siz V/ AC	Thread Male M6 Male M6 Male M8 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with inface S>/15X50 te: 15mm x 50m IC TEMPLAT sheets of clear a n making templith TCT tools an	Thread Length 20 15 36 15 30 - - 35 - SEAL bed to ho orking are adhesin £1 n x 1.5mn FE MATI acrylic in t ates and be	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 c rkpiece ssentia Rou VBS Size: - nickness can be	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
DCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	stided for the second s	A secolient va inforced plase E KNOBS Male Male TAPE ury fixing emoved £8.50 DLID LAMI ATERIAL r making tem ures. Solid I chined using N/SLP/65 e: 6.5 x 580	Alue for money. The stic and have a steril store of the steril steril store for jig making purpose made in tables etc. MT/1E2 Size: 16mm x 1r INATE TEMPLA Applates, vacuum be aminate can be actore of g most TCT blades x 580mm	he knobs are r bel insert or stu ISTABLE LE Male Autority 2.00 m TE eds, jigs and it and is or cutters. 228.50	nade Jd. VERS Female	1 2 3 V/ To ob Fi: Siz Siz Siz Siz Siz Siz Siz Siz Siz Siz	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with at s	Thread Length 20 15 36 15 30 - - 35 - - SEAL bed to he orking are adhesin fr x 1.5mm fr MATI acrylic in t ates and j nd can be	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
OCKING KEYS	stided states storestore st	y excellent va inforced plas E KNOBS Male TAPE TAPE try fixing emoved (8.50 EXAMPLE ATERIAL r making tem ures. Solid I chined using N/SLP/65	Alue for money. The stic and have a steries and have a steries and have a steries and the steries are steries and the steries and the steries are ster	he knobs are r bel insert or stu ISTABLE LE Male Asuring the building in hachinery, 2.00 m TE eds, jigs and ut and s or cutters.	nade Jd. VERS Female	(1) (2) (3) (3) (1) (2) (3) (3) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4	Thread Male M6 Male M6 Male M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with urface SS/15X50 te: 15mm x 50m IC TEMPLAT sheets of clear a n making templith TCT tools at CR/3122.	Thread Length 20 15 36 15 30 - - 35 - - SEAL bed to he orking are adhesin fr x 1.5mm fr MATI acrylic in t ates and j nd can be	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 re when an rip	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50
OCKING KEYS Male DOUBLE S Ideal where is required, o with your the DS/TAPE	sidential sident	A secolient va inforced plas E KNOBS Male Male TAPE ury fixing emoved £8.50 DLID LAMIA ATERIAL r making tem ures. Solid I chined using N/SLP/65 e: 6.5 x 580 N/SLP/8	Alue for money. The stic and have a step is and have a step is a s	he knobs are r bel insert or stu ISTABLE LE Male Autority 2.00 m TE eds, jigs and it and is or cutters. 228.50	nade ud. VERS Female	(1) (2) (3) (3) (1) (2) (3) (2) (3) (3) (2) (3) (4) (2) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4	Thread Male M6 Male M6 Male M6 Female M6 Female M6 Female M8 Male M8 Female M10 ACUUM BED form a vacuum struction free w at strip with at strip	Thread Length 20 15 36 15 30 - - 35 - - SEAL bed to he orking are adhesin £1 n x 1.5mm E MATI acrylic in t ates and j nd can be 00 50	Qty 10 10 10 4 4 4 4 4 4 4 9 9 10 10 10 10 11 12 9 9 10 10 10 10 11 12 13 14 14 14 14 14 14 14 14 14 14 14 15 16 17 18 19 10 11 12 12 13 14 15 16 17 <td>H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9</td> <td>D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85</td> <td>Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 cR/KB/PK7 cR/KB/PK7 cR/KB/PK3 cR/KB/PK3 cR/KB/PK3 cR/KB/PK3 cR/KB/PK4 cR/KB/PK4 cR/KB/PK4 cR/KB/PK4 cR/KB/PK3 cR/KB/PK4 cR/KB/PK3 cR/KB/PK5 cR/</td> <td>Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50</td>	H mm 14 20 27 31 31 31 31 38 40 62 40 62 40 62 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9	D mm 31 30 40 43 42 43 66 66 83 83 85 85 85 85 85 85 85 85 85 85 85 85 85	Product Ref. CR/KB/PK1 CR/KB/PK3 CR/KB/PK3 CR/KB/PK3 CR/KB/PK4 CR/KB/PK9 CR/KB/PK5 CR/KB/PK5 CR/KB/PK5 CR/KB/PK7 cR/KB/PK7 cR/KB/PK7 cR/KB/PK7 cR/KB/PK3 cR/KB/PK3 cR/KB/PK3 cR/KB/PK3 cR/KB/PK4 cR/KB/PK4 cR/KB/PK4 cR/KB/PK4 cR/KB/PK3 cR/KB/PK4 cR/KB/PK3 cR/KB/PK5 cR/	Price £5.00 £7.50 £8.00 £6.50 £6.50 £7.50 £7.50 £8.50

Size: 9.5 x 580 x 580mm

REPLACEMENT **COLLETS**

Collets for most makes of routers with capacities & sizes to match the shanks of **Trend cutters &** arbors.

REDUCTION SLEEVES

Reduction sleeves are used to reduce the collet size to take cutters with smaller shanks. They should only be used as a stop-gap, as the correct size collet is recommended. They should not be used for extensive periods or heavy work.

	To fit Shank ID	To fit Collet OD	L mm	Product Ref.	Price
	3.0mm	1/4"	25.0	CLT/SLV/363	£11.00
	1/8"	1/4"	25.0	CLT/SLV/3263	£11.00
	6.0mm	12.0mm	30.0	CLT/SLV/612	£8.50
Q	6.0mm	1/2"	30.0	CLT/SLV/6127	£8.50
10	6.0mm	8.0mm	25.0	CLT/SLV/68	£6.00
(3)	1/4"	12.0mm	30.0	CLT/SLV/6312	£8.50
	1/4"	3/8"	25.0	CLT/SLV/6395	£6.00
	1/4"	8.0mm	25.0	CLT/SLV/638	£6.00
	1/4"	1/2"	30.0	CLT/SLV/63127	£8.50
	8.0mm	1/2"	30.0	CLT/SLV/8127	£8.50
5	3/8"	1/2"	30.0	CLT/SLV/95127	£8.50
×	10.0mm	1/2"	30.0	CLT/SLV/10127	£8.50

Illustrations are not shown actual size and are only diagrammatic.

2

		<mark>6</mark> ⊞							<u>10.0mm 1/2</u>	2 30.0		.1/SLV/10127	10.50
Makaa	Pouter Medele	6.	.35mm (1/4"	-		8mm C		!	9.5mm (3/8'	-	1	2.7mm (1/2	-
Makes	Router Models	4	Product Ref.	Price	4	Product Ref.	Price		Product Ref.	Price		Product Ref.	Price
	<u>T2</u> T3	5	CLT/T2/635 CLT/T3/635	£17.50 £3.75	5	CLT/T2/8 CLT/T3/8	£17.50 £3.75		-			-	
TREND	T4		CLT/T4/635	£3.75		CLT/T4/8	£3.75		-				-
	T5, T5MK2	7'	CNS/T5/635	£14.00	7	CNS/T5/8	£14.00	4	-	004 50	4	-	004 50
	<u>T9</u> T10 & T11	1	CLT/T9/635 CLT/T10/635	£24.50 £22.00		CLT/T9/8 CLT/T10/8	£24.50 £22.00	1	CLT/T9/95 CLT/T10/95	£24.50 £22.00	+	CLT/T9/127 CLT/T10/127	£24.50 £22.00
	OFS50, OFS720	+ ·					22100				-		
ATLAS	OFSE850, 1000	1	249981	£20.50	1	256303	£20.50		-			-	
COPCO	OFSE2000	1	FR/14	£21.00	1	FR/8	£21.00	1	FR/38	£21.00	1	FR/12	£21.00
AXMINSTER	AW635R	5	PDW502763MM	£5.00	5	PDW502708N	£5.00		-			-	
BLACK	SR100	7	DE6951	£19.00	7	DE6952	£19.00		-			-	
&	BD780, 780E	-	04000004	00.50	-	0.4000000	05 50						
DECKER	KW780(E), 779(E), KW800(E), KW900(E)	5	94326901	£6.50	5	94326902	£5.50		-			-	
	POF52,400,500A	5	2-608-570-048	£9.00	5	2-608-570-049	£9.00						
	POF600ACE, PKF25	5	2-608-570-048	£9.00	5	2-608-570-04			-			-	
	GOF900A, POF1100AE,												
BOSCH	300ACE	7	2-608-570-101	£24.50	7	2-608-570-102			-			-	
	GOF1300ACE, 2000E	7	2-608-570-104	£28.50	7	2-608-570-10		7	2-608-570-106	£28.50	7	2-608-570-108	£28.50
	GOF1600A,1700ACE		2-608-570-110	£30.50	3	06859	£8.50	1	2-608-570-112	£30.50	1	2-608-570-114	£30.50
CASALS	FT2000VCE	1	FR/14	£21.00	1	FR/8	£21.00	1	FR/38	£21.00	1	FR/12	£21.00
СМТ	1E 2E	1	DE6273 CLT/T9/635	£21.00 £24.50	1	DE6274 CLT/T9/8	£21.00 £24.50	1	DE6275 CLT/T9/95	£21.00 £24.50	1	DE6278 CLT/T9/127	£21.00 £24.50
	DW613, 614, 615	7	DE6951	£19.00	7	DE6952	£19.00	-		224.30		GE1/13/12/	124.30
	DW613, 614, 615 DW670	5	94326901	£19.00 £6.50	5	94326902	£19.00 £5.50		-			-	
DEWALT	DW620, 621	7	DE6951	£19.00	7	DE6952	£19.00		-			-	
	DW624, 625EK, 629,	1	DE6273	£21.00	1	DE6274	£21.00	1	DE6275	£21.00	1	DE6278	£21.00
	DW626		-	001.00		DE6260	£23.50		-	001.00		DE6257	£23.50
DRAPER	R1900V PT1200V	1	FR/14 2-608-570-048	£21.00 £9.00	15	FR/8 2-608-570-049	£21.00 £9.00	1	FR/38	£21.00	1	FR/12	£21.00
		7	DE6951		7	DE6952			-				
	MKF67, MOF69, 96, 96E	7		£19.00 £19.00	7		£19.00 £19.00		-			-	
ELU	OF97, 97E	- · ·	DE6951			DE6952						-	
	MKF167, 267	5	94326901	£6.50	5	94326902	£5.50		-	001.00		-	
	MOF77, 98, 131, 177, 177E	1	DE6273	£21.00	1	DE6274	£21.00	1	DE6275	£21.00	1	DE6278	£21.00
FESTO	OF2000E	1	DE6273	£21.00	1	DE6274	£21.00	1	DE6275	£21.00	1	DE6278	£21.00
	TP246(E), R346EC	1	31566	£26.50	1	31567	£26.50	1	31568	£26.50	1	31570	£26.50
FREUD	FT2000E	1	FR/14	£21.00	1	FR/8	£21.00	1	FR/38	£21.00	1	FR/12	£21.00
	TR6	6	960114Z	£6.50	-	-	045.00	<u> </u>	-			-	
HITACHI	M8, M8V, M12V, M12SA, TR12	2	302194 956927Z	£43.00 £8.50	5	302193 06859	£45.00 £8.50	3	- 956928Z	£8.50	2	- 956926Z	£25.50
	FM8, ZK2008	4	997525	£9.00	4	997526	£13.00		-	20.00	-	-	220.00
	25C44	5	K44/635	£4.00	5	K44/8	£4.00		-			-	
KINZO	25C46EP	7	K46/635	£8.00	7	K46/8	£8.00		-		7	K46/127	£8.00
	3600B, 3601B	3	06033	£8.50	3	06859	£8.50	3	06034	£8.50	2	10297	£25.50
MAKITA	3612BR, 3612C, 3612	3	06033	£8.50	3	06859	£8.50	3	06034	£8.50	1	06748	£27.50
	3700B,3703, 3705 3620(M362)	6	06053	£4.75	6	06864	£4.25		-			-	
METABO	OF1612, OFE1812	1	31566	£26.50	1	31567	£26.50	1	31568	£26.50	1	31570	£26.50
METABO NUTOOL	XP12	7	K46/635	£8.00	7	K46/8	£8.00	-	-	~~0.00	7	K46/127	£8.00
PERFORMANCE	PRO1250R(D), 2050R	7			7	K46/8	£8.00 £8.00	-	-		7	K46/127	
POWER		_	K46/635	£8.00							1		£8.00
POWER DEVIL	PDW5026, 5027	5	PDW502763MM	£5.00	5	PDW502708N	M £5.00	-	-			-	
	RE120, TR30P R150, R151, RE155K	6	50437821 50413020	£6.00 £6.00	4	50436007	£21.50		-			-	
RYOBI	R500, R502	3	50413020	£8.50	3	06859	£8.50	3	50413012	£8.50	2	50436880	£43.00
	RE600N, R600N, RE601	3	50412980	£8.50	3	06859	£8.50	3	50413012	£8.50	1	50475045	£34.00
TTECH	TT/R127	7	K46/635	£8.00	7	K46/8	£8.00		-		7	K46/127	£8.00
		1						-					



WOODWORKING ACCESSORIES



Our complete range

of spindle tooling is

shown in our Industrial Tooling

Catalogue.

MULTI PROFILE SYSTEM TOOLING

These cutter blocks are ideal for the larger workshop. The range includes cutter heads made from steel or alloy. Tool steel and tungsten carbide tipped blades are available. Please see further details in our Industrial Tooling Catalogue.



Phone 0800 487363 for your free Industrial Tooling Catalogue and details of your nearest stockist.

MULTI PROFILE SYSTEM CUTTER BLOCKS 40 X 4MM & 50 X 4MM



Cutterhead bodies in hard wearing aluminium or steel complete with 4mm thick tool steel rebate knives and corresponding limitor plates.

Suitable for jointing, rebating and profiling in softwood and hardwood.

Dia. Block Only	Dia. with Rebate Knives	Thickness	Product Ref.	No. of Blades	Bore	Body	Max. RPM	Price
78mm	90	40mm	IT/776 010 1	2	30mm	Steel	7,000 - 9,000	£100.50
93mm	105	40mm	IT/776 006 1	2	30mm	Steel	6,000 - 9,000	£65.50
93mm	105	40mm	IT/776 006 7	2	1 1/4"	Steel	6,000 - 9,000	£65.50
100mm	112	40mm	IT/776 020 1	2	30mm	Alloy	5,500 - 8,400	£77.00
100mm	112	40mm	IT/776 010 7	2	1 1/4"	Alloy	5,500 - 8,400	£77.00
120mm	132	40mm	IT/776 007 1	2	30mm	Steel	5,100 - 7,900	£77.00
114mm	128	40/50mm	IT/776 008 1	2	30mm	Steel	5,000 - 8,000	£77.00
114mm	128	40/50mm	IT/776 008 7	2	1 1/4"	Steel	5,000 - 8,000	£77.00

MULTI PROFILE SYSTEM CUTTER BLOCK 40 X 4MM SET

Cutter set comprising Alloy block IT/776 020 1 (100 x 40 x 30mm), Knives IT/33 001 40 to IT/33 006 40, Limitors IT/34 001 40 to IT/34 006 40. Supplied in a wooden storage box.




IT/33 003 40 Knives

IT/34 003 40 Limitors

IT/33 005 40 Knives

IT/34 005 40 Limitors



IT/33 002 40 Knives IT/34 002 40 Limitors



IT/33 004 40 Knives IT/34 004 40 Limitors



IT/33 006 40 Knives IT/34 006 40 Limitors



IT/ST/SET001



£177.50





 $\left(\right)$







All prices are exclusive of VAT

SPINDLE TO

۲

MULTI PROFILE SYSTEM CUTTER **KNIVES & LIMITORS**

A small selection of our 40mm x 4mm knives for use with Trend multi-profile system cutter blocks. In tool steel with limitors available. See the Industrial Tooling Catalogue for all shapes. All knives and Limitors are sold as pairs.







IT/33 001 40 Knives £8.50 IT/34 001 40 Limitors £7.50




IT/33 005 40 Knives £8.50 IT/34 005 40 Limitors £7.50



IT/33 009 40 Knives £8.50 IT/34 009 40 Limitors £7.50



IT/33 013 40 Knives £8.50 IT/34 013 40 Limitors £7.50




IT/33 017 40 Knives £8.50 IT/34 017 40 Limitors £7.50



IT/33 021 40 Knives £8.50 IT/34 021 40 Limitors £7.50


More sizes and shapes can be found in the Industrial Tooling Catalogue.



IT/33 002 40 Knives £8.50 IT/34 002 40 Limitors £7.50



IT/33 006 40 Knives £8.50 IT/34 006 40 Limitors £7.50



IT/34 010 40 Limitors £7.50



IT/33 014 40 Knives £8.50 IT/34 014 40 Limitors £7.50






£8.50 IT/34 022 40 Limitors £7.50



IT/33 003 40 Knives £8.50 IT/34 003 40 Limitors £7.50



IT/33 007 40 Knives £8.50 IT/34 007 40 Limitors £7.50



£8.50 IT/34 011 40 Limitors £7.50



IT/33 015 40 Knives £8.50 IT/34 015 40 Limitors £7.50



IT/33 019 40 Knives £8.50 IT/34 019 40 Limitors £7.50




IT/33 023 40 Knives IT/34 023 40 Limitors £7.50



£8.50

£7.50


IT/33 004 40 Knives IT/34 004 40 Limitors



IT/33 008 40 Knives £8.50 IT/34 008 40 Limitors £7.50



IT/33 012 40 Knives £8.50 IT/34 012 40 Limitors £7.50



IT/33 016 40 Knives £8.50 IT/34 016 40 Limitors £7.50



IT/33 020 40 Knives £8.50 IT/34 020 40 Limitors £7.50



IT/33 024 40 Knives £8.50 IT/34 024 40 Limitors £7.50















DISPOSABLE INSERT GROOVING CUTTERS WITH SCORERS 4-12MM

Hard wearing steel body complete with disposable tungsten carbide knives and scorers for improved finish. Suitable for producing grooves and slots in softwood, hardwood and manmade boards (with or without coating) on a spindle moulder.

> _ d _ D



_	Diameter D	Cut C	Product Ref.	No. of blades	Bore	Depth of cut C	Max RPM	Price
	150mm	4mm	IT/721 004 1	4+4	30mm	45mm	5,200 - 8,900	£135.50
	150mm	4mm	IT/721 004 7	4+4	1 1/4"	45mm	5,200 - 8,900	£135.50
	150mm	5mm	IT/721 005 1	4+4	30mm	45mm	5,200 - 8,900	£140.50
	150mm	6mm	IT/721 006 1	4+4	30mm	45mm	5,200 - 8,900	£148.50
	150mm	6mm	IT/721 006 7	4+4	1 1/4"	45mm	5,200 - 8,900	£148.50
	150mm	8mm	IT/721 013 1	4+4	30mm	45mm	5,200 - 8,900	£114.50
	150mm	8mm	IT/721 013 7	4+4	1 1/4"	45mm	5,200 - 8,900	£114.50
	150mm	10mm	IT/721 014 1	4+4	30mm	45mm	5,200 - 8,900	£123.50
	150mm	10mm	IT/721 014 7	4+4	1 1/4"	45mm	5,200 - 8,900	£123.50
	150mm	12mm	IT/721 015 1	4+4	30mm	45mm	5,200 - 8,900	£130.50


DISPOSABLE INSERT REBATING CUTTER BLOCKS

Cutterhead in steel, complete with disposable tungsten carbide knives and scorers for improved finish. Suitable for producing various thickness rebates in softwood, hardwood and man-made boards (with or without coating) on a Spindle Moulder.





NEW






	\sim
d Feed	EN847-1/2

С	;	Diameter D	Cut C	Product Ref.	No. of blades	Bore	Depth of cut C	Max RPM	Price
,	-	100mm	50mm	IT/733 106 1	2+4	30mm	20mm	7,600 - 12,900	£94.50
1		125mm	50mm	IT/733 102 1	2+4	30mm	30 mm	6,100 - 10,000	£97.00
		125mm	50mm	IT/733 102 7	3+4	1 1/4"	30 mm	6,100 - 10,000	£97.00

DISPOSABLE INSERT ADJUSTABLE CHAMFER CUTTER BLOCKS

Cutterhead body in steel complete with disposable tungsten carbide knives. Suitable for producing chamfer cuts at various angles in softwood, hardwood and man-made boards on a spindle moulder. Cutting angle can be adjusted in 7.5° steps by using notched scale. Fine adjustments of 1° is also possible.





154 trend



DISPOSABLE INSERT GLUE JOINT CUTTER BLOCKS


Cutterhead bodies in hard wearing steel complete with disposable tungsten carbide knives. Suitable for producing 'finger style' reversible glue joints in softwood, hardwood and man-made boards on a spindle moulder.




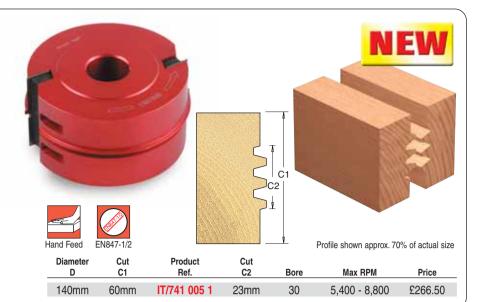

DISPOSABLE INSERT PROFILE - COUNTER PROFILE CUTTER BLOCKS

Cutterhead in hard wearing aluminium, complete with disposable tungsten carbide knives. Suitable for producing various profile / counter profile joints in softwood, hardwood and manmade boards on a spindle moulder. Raising or lowering the cutter on the spindle moulder produces both parts of the joint. Same tool body accepts all four different profiles.



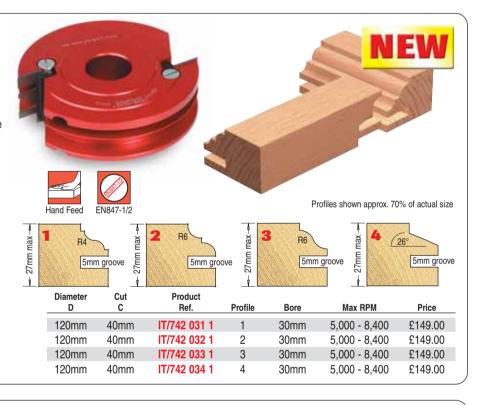

DISPOSABLE INSERT PANEL RAISING CUTTERHEAD Cutterhead in hard wearing aluminium, complete with disposable tungsten carbide knives. Suitable for producing various raised panel profiles in softwood, hardwood and man-made boards on a spindle moulder. Same tool body accepts all three different profiles. Hand Feed EN847-1/2 50.5mm 50.5mm 3 1 R5 R13 Diameter Cut Product D С Ref. Profile Bore


С 6 d-D




All prices are exclusive of VAT



٢

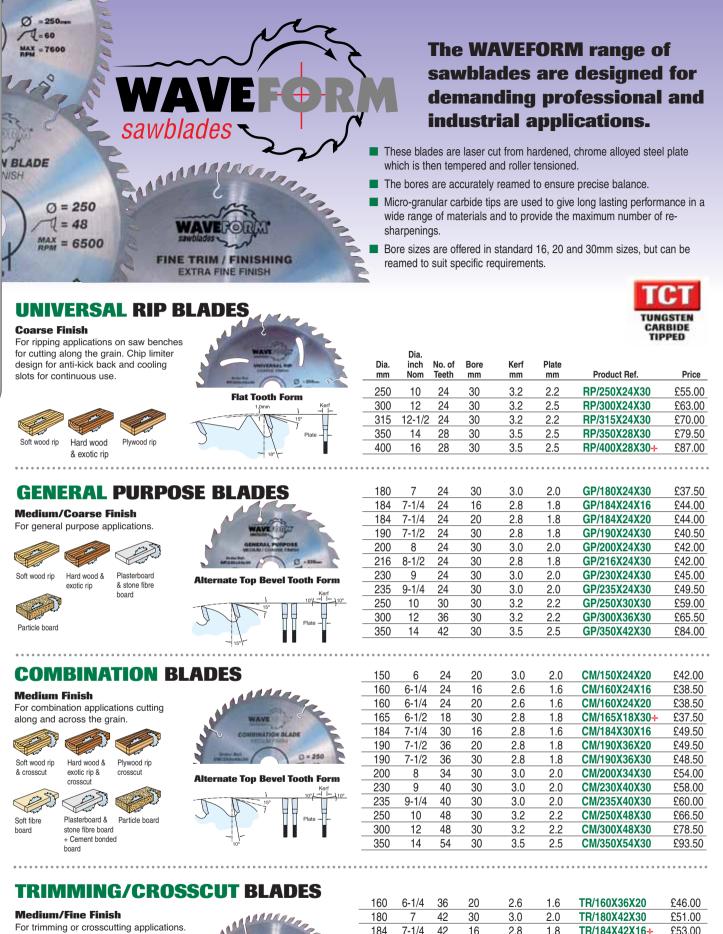





Plate

160	0-1/4	30	20	2.0	1.0	IR/100A30A20	£40.00
180	7	42	30	3.0	2.0	TR/180X42X30	£51.00
184	7-1/4	42	16	2.8	1.8	TR/184X42X16+	£53.00
184	7-1/4	42	20	2.8	1.8	TR/184X42X20	£57.00
190	7-1/2	48	20	2.8	1.8	TR/190X48X20	£58.00
190	7-1/2	48	30	2.8	1.8	TR/190X48X30	£57.00
200	8	48	30	3.0	2.0	TR/200X48X30	£61.50
216	8-1/2	48	30	2.8	1.8	TR/216X48X30	£66.50
230	9	48	30	3.0	2.0	TR/230X48X30	£66.50
235	9-1/4	48	30	3.0	2.0	TR/235X48X30	£66.50
250	10	60	30	3.2	2.2	TR/250X60X30	£81.50
300	12	60	30	3.2	2.2	TR/300X60X30	£87.50




SAWBLADES

 \odot

FINE TRIM/FINISHING BLADES

Extra Fine Finish

For finishing or fine trimming applications

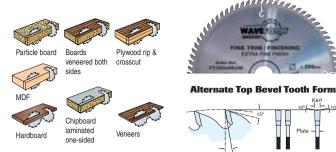

PANEL TRIMMING BLADES

Super Fine Finish

For fine super trimming of panels. These blades have a triple chip tooth design with a positive hook for super fine finish.





Chipboards laminated Particle board

MARE T	THE REAL PROPERTY OF	Annanan
	12	~
Triple chip	tooth f	orm
15°		45° 45°

235	9-1/4	60	30	3.0	2.0	FT/235X60X30	£81.50
250	10	80	30	3.2	2.2	FT/250X80X30	£93.50
300	12	96	30	3.2	2.2	FT/300X96X30	£105.50
350	14	108	30	3.5	2.5	FT/350X108X30	£126.00
150	6	48	20	3.0	2.0	PT/150X48X20+	£58.50
160	6-1/4	48	20	2.6	1.6	PT/160X48X20	£67.50
184	7-1/4	58	16	2.8	1.8	PT/184X58X16	£73.50
190	7-1/2	60	30	2.8	1.8	PT/190X60X30	£81.50
216	8-1/2	60	30	2.8	1.8	PT/216X60X30	£89.00
220	8-5/8	64	30	3.0	2.0	PT/220X64X30 • +	£90.50
235	9-1/4	60	30	3.0	2.0	PT/235X60X30	£93.50
 250	10	80	30	3.2	2.2	PT/250X80X30	£103.00

3.2

2.2

12

PT/220 for use on wall saws.

96

30

300

215

215

215

220

250

250

250

300

Thick-

ness

mm

1.8

1.8

1.8

1.8

1.8

18

1.8

1.8

1.8

1.8

1.8

8-1/2

8-1/2

8-1/2

8-5/8

10

10

10

12

24

48

60

60

24

42

72

36

30

30

30

30

30

30

30

30

Price

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.50

£2.75

£2.75

Dia

inch

Nom

6

6-1/4

7

7-1/4

7-1/2

8

8-1/2

9

No. of

Teeth

48

48

58

58

60

64

60

60

Bore

mm

20

20

30

16

30

30

30

30

Kerf

mm

3.0

2.6

3.0

2.8

2.8

3.0

2.8

3.0

Plate

mm

2.0

1.6

2.0

2.8

1.8

2.0

1.8

2.0

Product Ref.

FT/150X48X20

FT/160X48X20

FT/180X58X30

FT/184X58X16

FT/190X60X30

FT/200X64X30

FT/216X60X30

FT/230X60X30

PT/300X96X30

Dia.

mm

150

160

180

184

190

200

216

230

ALUM UM/PLASTIC BLADES AMAGAGA

Fine Finish

one-sided

For non-ferrous metals or plastics. These blades have a negative hook angle.





	160	6-1/4	48	20	2.8	2.2	AP/160X48X20	£66.50
	180	7	58	30	2.8	2.2	AP/180X58X30	£66.50
	184	7-1/4	58	16	2.8	2.2	AP/184X58X16	£71.00
	190	7-1/2	60	30	2.8	1.8	AP/190X60X30	£80.50
	216	8-1/2	64	30	2.8	2.2	AP/216X64X30	£89.00
	230	9	60	30	2.8	2.2	AP/230X60X30	£91.50
	235	9-1/4	60	30	2.8	2.2	AP/235X60X30	£92.50
	250	10	80	30	3.2	2.6	AP/250X80X30	£105.50
•	250	10	100	30	3.2	2.6	AP/250X100X30	£121.00
	300	12	96	30	3.2	2.6	AP/300X96X30	£103.00
	350	14	108	30	3.2	2.6	AP/350X108X30	£149.50
• • •								

2.8

2.8

28

3.0

3.4

3.2

3.2

3.8

Outside

Dia.

mm (OD)

30

30

30

30

30

30

30

30

32

32

31.8 (1-1/4")

1.8

1.8

18

2.0

2.4

2.4

2.4

2.8

Inside

Dia

mm (ID)

15

15.9 (5/8"

16

18

19.1 (3/4")

20

25

25.4 (1")

30

30

25


RADIAL ARM CR	DSSCUT 8
SNIP-OFF BLADE	S

Coarse, Medium or Fine Finish For crosscutting applications. These





Alternate Top Bevel tooth form



Outside

Dia

mm (OD)

20

20

20

25

25

25

25

25.4 (1")

25.4 (1")

30

15.9 (5/8")

Inside

Dia.

mm (ID)

12.7 (1/2")

12.7 (1/2")

15

16

15

15.9 (5/8")

19.1 (3/4")

20

15.9 (5/8")

19.1 (3/4")

12.7 (1/2")

N.B. The greater number of teeth the finer the finish. *CC/215 blades have a negative hook angle.

Product

Ref.

BW1

BW27

BW11

BW17

BW23

BW3

BW5

BW4

BW33

BW34

BW₂



Thick-

ness

mm

1.8

1.8

1.8

1.8

1.8

1.8

1.8

1.8

1.8

1.8

1.8

Product

Ref.

BW24

BW45

BW25

BW16

BW15

BW12

BW14

BW20

BW29

BW30

trend

BW6

CC/215X24X30*

CC/215X48X30

CC/215X60X30*

CC/220X60X30+

CC/250X24X30

CC/250X42X30

CC/250X72X30

CC/300X36X30-

WAVEFORM SAWBLADE **BUSHING WASHERS**

Particle Board

(Reducing Rings)

Chipboard Laminated

one-sided

- Accurately machined with reamed bores and splined outside edges for a precision fit into the blade bore of Trend Waveform sawblades only.
- Extra care must be taken when mounting sawblades onto a saw machine spindle when using bushing washers.
- Only for use with Trend Waveform & Industrial Sawblades.

Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into blade body of Trend Waveform sawblades only. Loose bushing washers/rings must not be used.

Price

£54.00

£56.00

£61.50

£67.50

£77.50

£73.50

£76.00

£79.50

£119.00

£45.00

£67.50

£76.00

£87.50

£63.00

£87.50

£93.50

£85.50

Price

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

157



A complete range of Tungsten **Carbide Tipped Circular** Sawblades for a professional finish in wood, MDF, particle board, hardboard & plywood. **Used by Professional Tradesmen.** Blade sizes from 125 to 350mm catering for cordless trim saws to bench sa<u>ws.</u>

sawblades



158 trend

UNGSTEN CARBIDE TIPPED

8430

16mm

QUALIT

Reamed bore to ensure precise fit to spindle.

- Wood cutting blades have front bevel tooth form for a superior quality of cut.
- Silverbraze to ensure tip is bonded securely to body.

Microgranular Tungsten Carbide Tipped to allow cutting of abrasive materials.

Specific sawblades with anti-kickback tooth design.

Body hardened and tempered to maintain trueness.

Laser etched on reverse to European standard EN847-1/2. The Trend name for traceability and a guarantee of quality.

Blades 250mmØ and above are roller tensioned to prevent distortion when blade is under stress when rotating and cutting.

High grade alloy steel plate body precision ground to maintain flatness.

WOOD & WOOD BASED MATERIALS

Less teeth

- Preferred for ripping along the grain of hard and soft wood and other wood based material.
- Coarser finish.
- Faster feed rate.

More teeth

Preferred for cutting across grain of hard and soft wood.

MDF


- Finer finish.
- Slower feed rate.

Suitable for:


- Softwood
- Hardwood
 - od Hardboard board Plywood
- Particle board



Alternate top bevel tooth form



Teeth have top and front bevel which allows the blade to cut more easily into the wood.

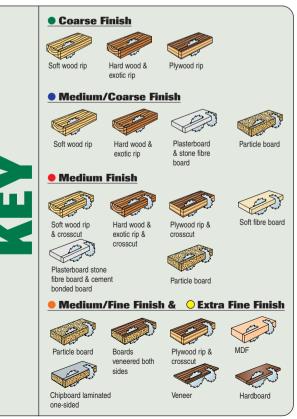

V			Ord	or Ref.	Ø a tabimin			
Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
• 125	5	12	20	12.7	2.4	1.5	CSB/12512	£14.50
• 125	5	24	20	12.7	2.4	1.5	CSB/12524	£15.50
• 130	5-1/8	12	20	16	2.4	1.5	CSB/13012	£16.00
• 130	5-1/8	24	20	16	2.4	1.5	CSB/13024	£18.50
• 134	5-1/4	12	20	-	1.7	1.0	CSB/13412	£16.00
• 134	5-1/4	24	20	-	1.7	1.0	CSB/13424	£18.50
• 140	5-1/2	12	20	12.7 or 16	2.4	1.5	CSB/14012	£16.00
• 140	5-1/2	24	20	12.7 or 16	2.4	1.5	CSB/14024	£18.50
• 150	6	12	20	16	2.4	1.5	CSB/15012	£16.00
• 150	6	12	30	-	2.4	1.5	CSB/15012A	£16.00
• 150	6	24	20	16	2.4	1.5	CSB/15024	£17.00
 153 160 	6 6-1/4	24 12	20	-	2.4	1.5	CSB/15324 CSB/16012	£17.00
160	6-1/4	24	20 20	<u>16</u> 16	2.4	1.5 1.5	CSB/16012 CSB/16024	£19.00 £19.00
160	6-1/4	48	20	16	2.4	1.5	CSB/16024 CSB/16048	£19.00 £22.50
• 165	6-1/2	12	30	16 or 20	2.4	1.5	CSB/16512	£19.00
• 165	6-1/2	18	30	16 or 20	2.4	1.5	CSB/16518	£19.00
• 165	6-1/2	24	30	16 or 20	2.4	1.5	CSB/16524	£19.50
• 180	7	24	30	16 or 20	2.4	1.5	CSB/18024	£19.50
• 180	7	30	30	16 or 20	2.4	1.5	CSB/18030	£21.00
• 180	7	40	30	16 or 20	2.4	1.5	CSB/18040	£21.50
• 184	7-1/4	24	16	-	2.6	1.7	CSB/18424	£20.00
• 184	7-1/4	24	30	-	2.6	1.7	CSB/18424A	£20.00
• 184	7-1/4	30	16	-	2.6	1.7	CSB/18430	£21.00
• 184	7-1/4	30	30	-	2.6	1.7	CSB/18430A	£21.00
e 184	7-1/4	40	16	-	2.6	1.7	CSB/18440	£21.50
• 184	7-1/4	40	30	-	2.6	1.7	CSB/18440A	£21.50
0 184	7-1/4	58	30	-	2.6	1.7	CSB/18458	£24.50
• 190	7-1/2	12	30	16 or 20	2.4	1.6	CSB/19012	£15.50
• 190	7-1/2	24	30	16 or 20	2.6	1.7	CSB/19024	£20.00
 190 190 	7-1/2 7-1/2	24	16 30	-	2.6	1.7	CSB/19024A CSB/19040	£20.00 £21.50
• 190 • 190	7-1/2	40	16	16 or 20	2.6	<u>1.7</u> 1.7	CSB/19040 CSB/19040A	£21.50 £21.50
 190 200 	8	12	30	-	2.0	1.6	CSB/19040A CSB/20012	£21.50 £17.50
200	8	24	30	16 or 20	2.4	1.7	CSB/20012 CSB/20024	£21.50
200	8	40	30	16 or 20	2.6	1.7	CSB/20024 CSB/20040	£23.50
210	8-1/4	24	30	25	2.4	1.6	CSB/21024	£23.50
210	8-1/4	48	30	25	2.4	1.6	CSB/21048	£26.00
• 215	8-1/2	24	30	-	2.6	1.7	CSB/21524	£24.00
0 215	8-1/2	48	30	-	2.6	1.7	CSB/21548	£28.50
0 215	8-1/2	60	30	-	2.6	1.7	CSB/21560	£30.00
220	8-5/8	24	30	-	2.4	1.6	CSB/22024	£24.50
• 220	8-5/8	48	30	-	2.4	1.6	CSB/22048	£27.00
• 230	9	24	30	-	2.6	1.7	CSB/23024	£26.00
230	9	40	30	-	2.6	1.7	CSB/23040	£27.50
235	9-1/4	24	30	16 or 25	2.6	1.7	CSB/23524	£26.00
• 235	9-1/4	40	30	16 or 25	2.6	1.7	CSB/23540	£27.50
240	9-1/2	24	30	-	2.8	1.8	CSB/24024	£25.50
240250	9-1/2 10 nom.	48 24	30	- 16, 20 or 25.4	2.8	1.8	CSB/24048 CSB/25024	£30.00 £27.00
 250 250 	10 nom.	30		16, 20 or 25.4	3.0 3.0	2.0	CSB/25024 CSB/25030	£30.50
 250 250 	10 nom.	48		16, 20 or 25.4	3.0	2.0	CSB/25030	£32.50
250	10 nom.	60		16, 20 or 25.4	3.0	2.0	CSB/25060	£34.50
0 250	10 nom.	80		16, 20 or 25.4	3.0	2.0	CSB/25080	£38.50
• 300	11-7/8	24	30	-	2.8	1.8	CSB/30024	£33.00
• 300	11-7/8	32	30	-	3.2	2.2	CSB/30032	£36.50
• 300	11-7/8	48	30	-	2.8	1.8	CSB/30048	£38.00
• 300	11-7/8	72	30	-	2.8	1.8	CSB/30072	£48.00
• 315	12-3/8	24	30	-	3.2	2.2	CSB/31524	£34.50
• 315	12-3/8	48	30	-	3.2	2.2	CSB/31548	£40.50
<u> </u>	12-3/8	72	30	-	3.2	2.2	CSB/31572	£67.50
• 350	13-3/4	28	30	-	3.0	2.2	CSB/35028	£43.00
• 350	13-3/4	64	30	-	2.8	1.8	CSB/35064	£52.00
<u> </u>	13-3/4	108	30	-	2.8	1.8	CSB/350108	£63.50

RAFTE

ABI

CRAFT

TUNOSTEN CAL

 \odot




NON-STICK COATED BLADES

Non-stick PTFE coat to prevent resin build up and increase sawblade life.



Alternate top bevel tooth form




CORDLESS TRIM SAWBLADES

Thin kerf anti-kickback sawblades for cordless trim saws.

Not for use with Bosch GSK 24




Alternate top bevel tooth form



NAIL CUTTING BLADES

Teeth have top and front bevel which allows the blade to cut more easily through the timber.



160 trend

● 184 7-1/4 24 16 - 2.6 1.7 CSB/TC18424 £20.5 ● 184 7-1/4 40 16 - 2.6 1.7 CSB/TC18424 £22.5 ● 190 7-1/2 24 30 16 or 20 2.6 1.7 CSB/TC19024 £21.0 ● 190 7-1/2 40 30 16 or 20 2.6 1.7 CSB/TC19040 £24.5 ● 235 9-1/4 24 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5 ● 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23540 £29.0	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
● 184 7-1/4 40 16 - 2.6 1.7 CSB/TC18440 £22.5 ● 190 7-1/2 24 30 16 or 20 2.6 1.7 CSB/TC19024 £21.0 ● 190 7-1/2 40 30 16 or 20 2.6 1.7 CSB/TC19024 £21.0 ● 190 7-1/2 40 30 16 or 20 2.6 1.7 CSB/TC19040 £24.5 ● 235 9-1/4 24 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5 ● 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23540 £29.0	• 160	6-1/4	24	20	16	2.4	1.5	CSB/TC16024	£20.00
● 190 7-1/2 24 30 16 or 20 2.6 1.7 CSB/TC19024 £21.0 ● 190 7-1/2 40 30 16 or 20 2.6 1.7 CSB/TC19024 £24.5 ● 190 7-1/2 40 30 16 or 25 2.6 1.7 CSB/TC19040 £24.5 ● 235 9-1/4 24 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5 ● 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23540 £29.0	• 184	7-1/4	24	16	-	2.6	1.7	CSB/TC18424	£20.50
● 190 7-1/2 40 30 16 or 20 2.6 1.7 CSB/TC19040 £24.5 ● 235 9-1/4 24 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5 ● 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23540 £29.0	• 184	7-1/4	40	16	-	2.6	1.7	CSB/TC18440	£22.50
● 235 9-1/4 24 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5 ● 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23524 £26.5	• 190	7-1/2	24	30	16 or 20	2.6	1.7	CSB/TC19024	£21.00
• 235 9-1/4 40 30 16 or 25 2.6 1.7 CSB/TC23540 £29.0	• 190	7-1/2	40	30	16 or 20	2.6	1.7	CSB/TC19040	£24.50
	• 235	9-1/4	24	30	16 or 25	2.6	1.7	CSB/TC23524	£26.50
• 250 10 48 30 16 20 or 25 4 3.0 2.0 CSB/TC25048 £35.0	• 235	9-1/4	40	30	16 or 25	2.6	1.7	CSB/TC23540	£29.00
	• 250	10	48	30	16, 20 or 25.4	3.0	2.0	CSB/TC25048	£35.00








Particle board







	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
	136	5-3/8	12	10	-	1.7	1.0	CSB/13612T	£16.00
	136	5-3/8	24	10	-	1.7	1.0	CSB/13624T	£18.50
	138	5-3/8	12	10	-	2.0	1.2	CSB/13812T	£16.00
	138	5-3/8	24	10	-	2.0	1.2	CSB/13824T	£18.50
	150	6	12	10	-	1.7	1.0	CSB/15012TB	£16.00
	150	6	24	10	-	1.5	1.0	CSB/15024TB	£19.00
	160	6-1/4	12	16	-	1.5	1.0	CSB/16012T	£17.50
	160	6-1/4	24	16	-	1.5	1.0	CSB/16024T	£17.50
	165	6-1/2	12	10	-	1.5	1.0	CSB/16512TA	£19.00
	165	6-1/2	12	30	-	1.6	1.0	N CSB/16512TB	£17.50
	165	6-1/2	24	10	-	1.7	1.0	CSB/16524TA	£19.50
	165	6-1/2	24	20	-	1.6	1.0	CSB/16524T	£17.00
	165	6-1/2	24	30	-	1.6	1.0	N CSB/16524TB	£18.50
	165	6-1/2	40	20	-	1.6	1.0	CSB/16540T	£18.50
	165	6-1/2	40	30	-	1.6	1.0	N CSB/16540TB	£19.50
\bigcirc	165	6-1/2	52	20	-	1.6	1.0	CSB/16552T	£19.50
	184	7-1/4	24	20	-	1.8	1.2	N CSB/18424T	£19.00
	190	7-1/2	24	30	-	2.0	1.4	CSB/19024TB	£20.00
	190	7-1/2	40	30	-	2.0	1.4	CSB/19040TB	£21.50
100 March		Im	200	_	and the second se	100			



Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
• 184	7-1/4	30	16	-	2.0	1.5	CSB/NC18430	£20.00
• 184	7-1/4	30	30	-	2.0	1.5	CSB/NC18430A	£20.00
235	9-1/4	40	30	-	2.0	1.5	CSB/NC23540	£26.00





exotic rip

.

 \odot


MITRE SAW CROSSCUTTING

For crosscutting applications. Blades have a negative hook angle, to minimise 'pick up' and 'snatching'.

ANGLE



Alternate top bevel tooth form

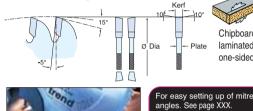

Dia. i	Dia. nch No. of Iom Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
• 190 7·	-1/2 24	30	20	2.6	1.7	CSB/CC19024	£20.00
• 190 7	-1/2 48	30	20	2.6	1.7	CSB/CC19048	£21.50
Hard wood & • 190 7	-1/2 60	30	20	2.6	1.7	CSB/CC19060	£24.00
	-1/4 24	30	-	2.8	1.8	CSB/CC21024	£23.50
210 8	-1/4 48	30	-	2.8	1.8	CSB/CC21048	£24.50
215 8	-1/2 24	30	-	2.6	1.7	CSB/CC21524	£24.50
• 215 8·	-1/2 48	30	-	2.6	1.7	CSB/CC21548	£26.00
	-1/2 60	30	-	2.6	1.7	CSB/CC21560	£30.00
crosscut e 216 8	-1/2 48	30	-	2.6	1.7	CSB/CC21648	£26.00
• 250 10	nom. 24	30	16, 20 or 25.4	3.0	2.0	CSB/CC25024	£28.50
• 250 10	nom. 42	30	16, 20 or 25.4	3.0	2.0	CSB/CC25042	£31.50
 ● 250 10 	nom. 72	30	16, 20 or 25.4	3.0	2.0	CSB/CC25072	£37.50
Soft wood rip • 254	10 24	30	-	2.5	1.8 👥	CSB/CC25424T	£28.00
254	10 40	30	-	2.5	1.8 🚺	CSB/CC25440T	£30.00
- 254	10 60	30	-	2.5	1.8 👞	CSB/CC25460T	£39.00
0 254	10 80	30	-	2.5	1.8 🚺	CSB/CC25480T	£43.00
Chipboard • 255	10 24	30	-	2.4	1.8	CSB/CC25524	£26.00
	10 42	30	-	2.4	1.8	CSB/CC25542	£30.50
one-sided O 255	10 72	30	-	2.4	1.8	CSB/CC25572	£35.50
260 10)-1/4 24	30	-	2.6	2.0	CSB/CC26024	£26.00
g up of mitre 260 10)-1/4 42	30	-	2.6	2.0	CSB/CC26042	£30.50
e XXX. O 260 10)-1/4 72	30	-	2.6	2.0	CSB/CC26072	£35.50
• 305	12 24	30	-	3.0	2.0	CSB/CC30524	£34.50
• 305	12 48	30	-	3.0	2.0	CSB/CC30548	£40.50
9 305	12 64	30	-	3.0	2.0	CSB/CC30564	£43.00
IGLEFIX 0 350 13	3-3/4 108	30	-	3.5	2.5	CSB/CC350108	£67.50


LUMINIUM/PLASTI **& WORKTOPS**

Ref.

Blades have negative hook angle.



Triple chip tooth form



30

30

30

30

30

20

20

25

25

25.4

1.5

1.7

1.5

1.7

1.7

CSB/BW15A

CSB/BW15B

CSB/BW12A

CSB/BW12


CSB/BW14

	 Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
1	136	5-3/8	30	10		1.7	1.0	CSB/AP13630T*	£24.50
5	150	6	36	10	-	1.5	1.0	CSB/AP15036TB*	£25.50
3	165	6-1/4	36	10	-	1.5	1.0	CSB/AP16536TA*	£26.50
	184	7-1/4	58	16	-	2.8	1.9	NOCSB/AP18458	£27.00
1	184	7-1/4	58	30	-	2.8	1.9	N CSB/AP18458A	£27.00
5	215	8-1/2	64	30	-	2.8	1.9	CSB/AP21564	£39.50
	250	10 nom.	84	30	16, 20 or 25.4	3.0	2.0	CSB/AP25084	£47.50
	254	10	80	30	-	2.8	1.8	Nov 25480 CSB/AP25480	£45.00
	254	10	96	30	-	2.8	1.8	Nov 25496 CSB/AP25496	£51.50
	300	11-7/8	96	30	-	3.0	2.0	N CSB/AP30096	£56.00
	305	12	84	30	-	3.0	2.0	CSB/AP30584	£47.50
	315	12-3/8	96	30	-	3.0	2.0	N CSB/AP31596	£56.00
	350	13-3/4	108	30	-	3.0	2.2	CSB/AP350108	£72.50



SPARE BUSHING WASHERS (Reducing Rings) Outside Inside Thick-Dia. (OD) Dia. (ID) ness Product Ref. Price mm mm mm £1.75 20 12.7 1.1 CSB/BW27 20 16 1.1 CSB/BW17 £1.75 CSB/BW45 £1.75 30 16 1.1 £1.75 30 16 CSB/BW45A 1.5 CSB/BW45B £1.75 ARBUAL 30 16 1.7 30 20 CSB/BW15 £1.75 1.1

Use 1.1mm thick for blades up to Ø 180mm Use 1.5mm thick for blades Ø 190-235mm Use 1.7mm for blades Ø 250mm



£1.75

£1.75

£1.75

£1.75

£1.75



BORE SIZE COMPATIBILITY CHART for SAWBLADES

AEG	DIA	BORE
HK125A, B TKS42	125 130	20 30(T)
HK40	140	20
AHK52, HKS52, HK45, HK46, HK52	150	20
KK55A, HK55B, HK160A/B, K55S	160	20
K66S, K566S, KS66E HK75	190 210	30 16(T)
AL-KO	210	16(T)
Woodmaster, PKS (all), Pro Excel	315	30
ATLAS COPCO	100	00
TSK42 PC55S	130 160	30 20
HK66	190	16*
HKS66	190	20
HK200, 201	200	30
HKS85 BLACK & DECKER	220	30
KS40T	140	12.7
BD855, KS855	160	16
KS555	165	30
P3703, KS865 P3710	180 190	30 30
KS65, 64T	190	30
SR700, BD800	210	20
P3902	235	30
BOSCH PKS46, GKS12V & 1923	150	16
GSK24V	160	20
GKS55, 1567, 1563	170	30
1557	190	16*
GKS65, 1564, 1568, PKS66, GKS68B		30
GKS755 GKS85S, 1566, 1653	210 220	20 30
GSM10S	254	16(CC)
CASALS		
BSC150, VSC50 SC210, VSC70	150 210	30 16
SC230	230	30
	200	
CHARNWOOD		
CHARNWOOD W240	255	30(CC)
CHARNWOOD		
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230	255	30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT	255 250 300	30(CC) 30(CC) 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351	255 250 300 150	30(CC) 30(CC) 30(CC) 20
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT	255 250 300	30(CC) 30(CC) 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL	255 250 300 150 165 184 184	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365	255 250 300 150 165 184 184 184	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T) 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL	255 250 300 150 165 184 184	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071	255 250 300 150 165 184 184 190 215	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746	255 250 300 150 165 184 184 184 190 215 235 240 250	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW883 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720	255 250 300 150 165 184 184 184 190 215 235 240 250 250	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746	255 250 300 150 165 184 184 184 190 215 235 240 250	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC330, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW760 DW742, 743, 710, 744, 746 DW750, 1251, 1501, 710, 1751/3, 720 DW709	255 300 150 165 184 184 190 215 235 240 250 250 250 260	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30(CC) 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC309, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105	255 250 300 150 165 184 184 190 215 235 240 250 250 250 250 250 300 300 300 300	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30 (CC) 30(CC) 30(CC) 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC3300, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400	255 300 150 165 184 184 190 215 235 240 250 250 260 300 300 300 305 315	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC3300, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729	255 250 300 150 165 184 184 190 215 235 240 250 250 250 250 250 300 300 300 300	30(CC) 30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30 (CC) 30(CC) 30(CC) 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540	255 250 300 150 165 184 184 190 215 235 240 250 250 250 260 300 305 305 350 315	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30 30(CC) 30(C
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153	255 250 300 150 165 184 184 190 215 235 240 250 250 250 250 260 300 300 305 315 315 350	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC3300, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS184, PT185	255 300 150 165 184 184 215 235 240 250 250 260 300 300 300 305 315 350 138 150 184	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153	255 250 300 150 165 184 184 190 215 235 240 250 250 250 250 260 300 300 305 315 315 350	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154 CS154, PT185 BTS250 CS315A, CTS12 EINHELL	255 250 150 165 184 184 190 215 235 240 250 250 250 250 300 300 305 315 350 138 150 184 250 315	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DW351 DW351 DC300, DW007 DW62 DC300KL DW700, DW701, 7071 DW383 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154, CTS12 EINHELL BHS55	255 250 150 165 184 190 215 235 250 250 250 250 250 300 300 305 315 350 138 150 184 250 250 260 300 305 315 350 305	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154, PT185 BTS250 CS315A, CTS12 EINHELL BHS55 BHS66	255 250 150 165 184 184 190 215 235 240 250 250 250 250 300 300 305 315 350 138 150 184 250 315	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30(CC)
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DW351 DW351 DC300, DW007 DW62 DC300KL DW700, DW701, 7071 DW383 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154, CTS12 EINHELL BHS55	255 250 150 165 184 190 215 235 250 250 250 250 250 300 300 305 315 350 138 150 184 250 250 260 300 305 315 350 305	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154 CS154 CS154, CTS12 EINHELL BHS55 BHS66 ELECTRA BECKUM TS250 KGS300/330, UK330, UK333	255 300 150 165 184 190 215 235 250 250 250 250 300 300 305 315 350 138 150 184 250 250 184 250 250	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30 30(CC) 30 30(CC) 30 30 30(CC) 30 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154 W1855 BHS55 BHS66 ELCTRA BECKUM TS250 KGS300/330, UK330, UK333 KGT500/550, PK250/K	255 300 150 165 184 184 190 215 235 240 250 250 300 300 305 305 315 350 138 150 150 150 150 184 250 315 315 315 315 3250 250	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW709 DW704, 705, 8001/3, 8101/3, 721 DW27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS154 CS154 CS154, CTS12 EINHELL BHS55 BHS66 ELECTRA BECKUM TS250 KGS300/330, UK330, UK333	255 300 150 165 184 190 215 235 250 250 250 250 300 300 305 315 350 138 150 184 250 250 184 250 250	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30(CC) 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30 30(CC) 30 30(CC) 30 30 30(CC) 30 30 30(CC) 30 30 30 30 30 30 30 30 30 30
CHARNWOOD W240 DELTA 36-250, -210, -070, 240, 074, 520 36-230 DEWALT DW351 DC390, DW007 DW62 DC300KL DW65, DW365 DW700, DW701, 7071 DW383 DW86 DW742, 743, 710, 744, 746 DW250, 1251, 1501, 710, 1751/3, 720 DW704, 705, 8001/3, 8101/3, 721 DW24700 D27105 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS153 CS315A, CTS12 EINHELL BHS55 BHS66 ELECTRA BECKUM TS250 KGS300/330, UK330, UK333 KGT500/550, PK250/K PK300K	255 250 300 150 165 184 184 190 235 240 250 250 250 300 305 315 315 150 184 250 315 315 160 184 250 305 305 305 305 305	30(CC) 30(CC) 20 20(T) 16 20(T) 30 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 10(T) 20 16 5/8* 30 30 30 30 30 30 30 30 30 30

ELU	DIA	BORE	
MH151	150	20	
MH155	170	30	
MH65	180	30	
MH165, MH265	190	30	
MH182	215	30	
PS174, 274, 274E	215	30(CC)	
MH85, MH286	235 250	30	
RAS1251, 1501 RAS1751/3	250	30(CC) 30(CC)	
TGS171, 271, 172, 173, 273, ETS21	250	30	
RAS8001/3, 8101/3	300	30(CC)	
ETS3001	300	30	
ETS3151	315	30	
RAS1600S1/3	350	30(CC)	
EUMENIA			
Universal	220	30	
FEIN			
SSK646	150	20(T)	
SSK660	160	16(T)	
SSK661	210	10(T)	
FERM			
18V	138	10(T)	
FKS185	184	30	
FREUD			
FCS184	184	10(T)	
FCS230	230	30(CC)	
FESTO	150	00	
AXF45, AF45E	150	20	
ATF55/55E, AP55/55E AT55E, AX50, AU42S, AUT42S	160 170	20 30	
AP65E/65EB, AT65E/65EB	190	30	
AP68E, AXP65, AU65S, AD65	200	30	
AP85E/88E, AXP85	235	30	
AXP132E	350	30	
HITACHI			
C5Y	125	20	
FC5SA1	150	20	
C6DA, FC65SA	160	20	
C6U	165	30	
C18DM	165	30(T)	
PSU6	170	16*	
7C7U, C7U, C7BU	180	30A	
PSU7	190	16*	
FC7SA	190	20	
PSM7 C8FC, C8FS	190 215	30 30(CC)	
PSU9, C9U	235	30(CC) 30	
C10FA, C10FB, C10FCA	250	30	
C10FCA	255	30(CC)	
HOLZHER			
2103, 2104, 2105, 2106	160	20	
2117, 2119	190	30	
2118, 2120	230	30	
INCA			
CH12	315	30	
KANGO	450	4.0	
6235	150	16*	
6070	184	16 16*	
6089	235	16*	
LUTZ HS58-2		16*	
HS150			
110150	200 250		
HS315 HS2001	250	16*	
HS315, HS2001			
HS315, HS2001 MAFELL SF32, X40, XE40	250	16*	
MAFELL	250 315	16* 30	
MAFELL SF32, X40, XE40	250 315 125	16* 30 20	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55	250 315 125 160	16* 30 20 20	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55 KSP65F	250 315 125 160 190	16* 30 20 20 30	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55 KSP65F KSP85F	250 315 125 160 190 230	16* 30 20 20 30 20*	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55 KSP65F KSP85F TFK85	250 315 125 160 190 230 315	16* 30 20 20 30 20* 30	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55 KSP65F KSP85F TFK85 ERIKA85E ERIKA85E ERIKA60E MAKITA	250 315 125 160 190 230 315 250 190	16* 30 20 20 30 20* 30 30 30 30	
MAFELL SF32, X40, XE40 MK\$55, S\$55, K\$S330, K\$T55 K\$P65F K\$P85F TFK85 ERIKA85E ERIKA60E MATTA 5600NB	250 315 125 160 190 230 315 250	16* 30 20 20 30 20* 30 30 30	
MAFELL SF32, X40, XE40 MKS55, SS55, KSS330, KST55 KSP65F KSP85F TFK85 ERIKA85E ERIKA85E ERIKA60E MAKITA	250 315 125 160 190 230 315 250 190	16* 30 20 20 30 20* 30 30 30 30	

MAKITA (CONTINUED)	DIA	BORE
5621DWB	165 184	20 16
SR1800, 5801B BSR730	184 190	20
5703R, 5017R, 5704R	190	30
LS0714	190	30(CC)
BLS820	215	20
SR2300, 5900BR	235	25*
5903R	235	30
LS1030 LS1013	250 255	25.4(CC)* 30(CC)
LS1013 LS1040, 2704, LF1000	260	30(CC)*
LS1214	305	30(CC)
МЕТАВО		
KS0852S, KS08255	150	20
KS1468S, KS1266S KS66, KSE68	190 190	20 30
KSP65	190	30
KSE1678, KGSE1670	210	16
KS6323S, 1785S	240	30
KGS303	250	30(CC)
NUTOOL	10.4	4.0
NPT714-2	184	16
PERFORMANCE PRO CLM8SCK	210	30
PERLES	210	
KS50	150	20
KS70	210	30
PEUGEOT		
SC53C, TC3009	150	20
SC66E, 66C TC3017	184 190	16 30
TC3014	200	30
POWER DEVIL	200	50
PDW5008	180	20*
18V	138	10(T)
REXON		- (2.2)
MS-10RA	250	5/8(CC)*
BTS-10A M2501A	250 255	5/8* 30(CC)
RYOBI	200	30(00)
W5002	150	16
CW-1801/150	150	20
W5502	160	20
CW-1801/165	165	30
W6502 W6402C	180 184	30 16
W6402C W6610, 6613, 6615	190	30
CMS1801	210	30
T5-221	220	25.4*
W8402C	235	16*
BT3000 RMS-1825, 1525	250 250	30
TSS-305	250 305	20 30
SCHEPPACH	300	
KG250, TKG250/E	250	20(CC)*
TS2500, KSE250	250	30
TS4000 (pre 1989)	300	30
TK, TKH, TKU, TS4000 (post 1989)	315	30
SEDGWICK TA315	315	30
SKIL	010	
1800, 1850H, 1850HM	150	20
1408H, 1409H, 1410H	165	16
1855, 416H, 1522, 1410, 1854	165	20
5740, 5590	180	16
1866U2 Classic 5266	184 190	16 16*
1986U, 1985U, 1525H, Legend	190 235	30
STAYER		
SLL251, SC271, SCE1600	250	30
SC250, SLL250, SC270	250	30(CC)
SCU75	250	20*
VIRUTEX SR74C	150	20
V79	180	20

Information taken from manufacturers catalogue and deemed correct at time of printing.

If in doubt about size and bore, please refer to your saw machine manual for the exact specification. (CC) = Radial arm or mitre saw (zero or negative hook angle).

 $\star~$ = Will require a suitable bushing washer made to machine manufacturers specification.

(T) = Thin body blade required for cordless trim saws.

All dimensions in mm unless otherwise stated.



Visit:

For more safety information www.trend-uk.com

0

Solid Carbide PLANER BLADES

Trend Solid Carbide Planer Blades fit most makes of portable electric planers & are supplied in pairs.

- High grade carbide.
- Precision ground.
- Two cutting edges and reversible for extended life.
- Conversion kit required for some planers.



SOLID TUNGSTEN

CARBIDE

PLANER BLADE PB/22

Blade length	8
Blade width	5
Blade thickness	1
Make	

B**2.0**mm 5.0mm 1.2mm Model No. P7102, P7103, PL805

BLACK & DECKER

PB/22 (price per pair) _

£8.50

PLANER BLADE PB/27

Blade length Blade width Blade thickness	92.0mm 5.5mm 1.1mm
Make	Model No.
AEG (ATLAS COPCO)	HTH 75 (NEW)
HITACHI	F30A, FU30
HOLZ-HER	2286

£10.00 **PB/27** (price per pair)

PLANER BLADE PB/28

Blade length Blade width Blade thickness	75.5mm 5.5mm 1.1mm
Make	Model No.
BLACK & DECKER	DN750, SR600, SR600K, BD750
BOSCH	0590, P400, 1590, 1591
HAFFNER	FH222
HOLZ-HER	2320, 2223 (OLD), 2121, 2330
KRESS	JETSTAR, EH6701, EH6702
MAFELL	HU75
METABO	6375
SKIL	98H

£8.50 PB/28 (price per pair)

SAFETY

- Never use dull blades.
- Unplug machine when fitting blades or undertaking any maintenance.
- Always refer to manufacturer's instructions when making adjustments.
- Planer blades must be securely clamped so that they cannot work loose in service.


		10 C	

Blade length Blade width Blade thickness	80.5mm 5.9mm 1.2mm	
Make	Model No.	
AEG (ATLAS COPCO)	450	
DEWALT	DW676K	
ELU	MFF40, MFF80	K, MFF80, MFF81, MFF81K
PB/25 (price per	pair) £8. l	50

PB/25 (price per pair)

PLANER BLADE PB/29 82.0mm **Blade length Blade width** 5.5mm Blade thickness 1.1mm Make Model No. AEG (ATLAS COPCO) EH82, EH82.1, EH700, EH822, H750, H500, EH3-82, EH800, EH450 **BLACK & DECKER** BD710, DN710, DN720, BD711, KW712, KW713, KW725, BD713, BD725 BOSCH PHO2-82, PHO3-82/B, PHO15-82, PHO16-82, PHO25-82, PHO30-82, PHO100, PHO150, PHO200, PH300, 1592-9, GHO282, GH31-82, GHO36-82C CASALS CE82, CE98ACE DEWALT DW677, DW678K, DW678EK, DW680, D26500, D26501 DRAPER PT682, P882 FELISATTI **TP282** FERM FP82 FREUD FE82, FE82VCE HAFFNER FH224 F20*, FU20*, P20V, P20SA HITACHI HOLZ-HER 2321, 2321-S, 2322, 2223 (NEW) EHU82, MHU82, MHU82S, MHU82D MAFELL M102*, 1900*, 1900B* 1901*, 1125* MAKITA 1100*, 1923B*, 1923BD*, 1923H, 1902 METABO EXPERT, 4382, HO0882, HO8382 NUTOOL NPT82 PERLES SK82A PEUGEOT RA82CS, RA400, RA3/82 SKIL 92H, 94H, 95H, 96H, 97H **RYOBI** L282, L1323A*, HL-82, L-1835, L180, GH014, EPN-7582 WOLF/KANGO 8614*, 8057*, 8108 **PB/29** (price per pair) £8.50

Requires conversion kit.

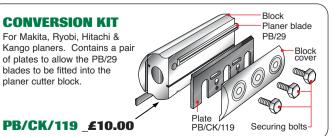

trend° 163

beadLOCK Loose Tenon Joinerv System

Patent No. US5.807.033 & US6.116.826

Make mortise & tenon joints with your drill.

The beadLOCK[®] joint is made by first using the jig to drill multiple overlapping holes to create a mortise into each of the two parts to be joined. Then, a corresponding length of beadLOCK[®] tenon dowel is cut and glued into the mortises. beadLOCK® is safe, simple, strong and requires only a drill and 3/8" or 1/2" drill bit.

- Innovative shape of tenon stock provides maximum side grain gluing surface.
- Deep joints are limited only by your drill bit.
- Easily join large or long lengths.
- Handles material thickness 3/4" and up
- Also ideal as a dowelling jig.
- Hardened steel drill blocks.
- Each kit is supplied with dowels. Additional tenon dowels are available.
- Router cutters are also available to make your own tenon dowels.
- Requires standard 3/8" or 1/2" drill bits (available separately).



Clamp jig to timber with an 'F' clamp or in a vice with the block in position 'A'. Drill holes to desired depth.



2. Slide guide block to position 'B' & drill remaining overlapping holes. Repeat on the other component.



3. Cut length of tenon dowel 1/8" shorter than the total mortise depth and glue the workpieces together.

BL/JIG/95 Suitable for 3/8" loose tenons.

BL/JIG/KIT

Suitable for 3/8" & 1/2" loose tenons.

Optional Accessories:

Drill Bits

BL/DRILL/95

BL/DRILL/127

Tenon Dowels

9.5mm (3/8") x 300mm Tenon Dowel

12.7mm (1/2") x 300mm Tenon Dowel

Pre-moulded birch Tenon Dowel 3/8".

Pre-moulded birch Tenon Dowel 1/2".

9.5mm (3/8") 'V' Point Drill Bit HSS drill for Beadlock with 3/8" shank.

12.7mm (1/2") 'V' Point Drill Bit HSS drill for Beadlock with 3/8" shank.

BL/DWL127/3 (pack of 3) ____

BL/DWL95/3 (pack of 3) _

£30.00

£6.00

£6.00

£8.50

£8.50

£42.50



TCT Router Cutters For 9.5mm (3/8") Tenon Dowel Diameter 26.3mm x 42mm cut. BL/95X1/2TC £48.50

For 12.7mm (1/2") Tenon Dowel Diameter 30.3mm x 38mm cut. BL/127X1/2TC £48.50





Framing joints for use in carcassing, joinery and furniture construction.



Angled mortises are constructed simply by cutting the shoulder of one component to the relevant angle

By using two or more loose tenons in line, wide components can be jointed, e.g. the middle rail of an internal door.



Differing thickness of timbers can be jointed along the centres by use of the shim pack included.

Includes:

BL/JIG/95

- **1 x Drill Block 9.5mm (3/8")**
- 1 x Shim Pack
- 2 x 9.5mm (3/8") x 300mm Tenon Dowel 1 x Drill Plate

BL/JIG/KIT

- 1 x Drill Block 9.5mm (3/8")
- **1 x Drill Block 12.7mm (1/2")**
- 1 x Shim Pack
- 2 x 9.5mm (3/8") x 300mm Tenon Dowel
- 2 x 12.7mm (1/2") x 300mm Tenon Dowel
- **1 x Drill Plate**

Specification:

Rating	DIY/Craftsman
Material thickness min. (9.5mm) _	19mm
Material thickness min. (12.7mm)	25mm



All prices are exclusive of VAT

To download Test Reviews, Spare Parts & Instruction Manuals Visit:

 (\mathbf{D})

٢

POCKET HOLE JIG

For fast and accurate joining of timber and plywood giving strong instant joints.

- Solid hardened bushes, with variable pitch of 29mm to 63mm.
- Use on timber, MDF, plywood and blockboard.
- Allows a variety of joints to be created individually.
- Uses square drive self tapping screws.
- Workpiece can be handled immediately after gluing & screwing creating time saving benefits.
- No clamps required.



Pocket Note Jig

Specification:

-	
Material thickness min.	16mm
Material thickness max.	38mm
Material width min.	38mm
Hole pitch	29mm-63mm
Drill diameter	9.5mm
Square drive bit size	No. 2
Screw sizes	No. 7 x 30mm

Optional Accessories:

SQUARE DRIVE

SELF TAPPING SCREW No. 7 x 30mm dome head self tapping screws.

PH/7X30/500 (pack of 500) _£8.50



POCKET HOLE PLUG CUTTER

Tool steel plug/pellet cutter. Use in a pillar drill to allow plugs to be made to cover the pocket hole pockets. Allows plugs up to 52mm long to be created in end grain.

PH/JIG_£60.50

Replacement Parts:

QUICK RELEASE

DRILL BIT

PH/DRILL/95Q

and the second second

PH/PC/95

SNAPPY SHANK 3/8"

A 9.5mm diameter stepped high

£12.50

£17.00

speed steel drill. Supplied with depth setting collar.





1. Adjust column position.



3. Drill pocket hole sockets.



2. Clamp timber.





All prices are exclusive of VAT

BORING TOOLS

- Our range of drilling tools include: twist drills, dowel drills, countersinks, counterbores, plug makers, machine bits and forstner bits.
- Grades and sizes are geared to satisfy the demanding needs of the building industry, the joinery trades and workshops.
- High quality and performance are the prime considerations in the design of our tooling which is manufactured using the latest technology.



n

BORING TOOL GRADES

High Speed Steel Tooling Produced entirely in HSS, ground with a very fine edge. Suitable only for non-abrasive materials, but will give a superior finish in soft timbers. HSS is slightly less expensive than TCT, but can be more suitable for certain applications i.e. drilling or cutting non-abrasive timbers & plastics.

Tungsten Carbide Tipped Tooling Tips are brazed onto a steel body. Designed for use with the most abrasive materials and will outlast HSS tooling by many times. Applications are used for cutting or drilling natural timbers, plywood, medium density fibre board, chipboard & abrasive

Carbon Steel Tooling

Less durable than HSS, WS is extensively used in the production of forstner & countersink tooling for use on natural timbers. Offers a cost effective solution for many applications.

Twist Drills

- HSS and TCT.
- Slow spiral is sometimes preferred for drilling end grain in wood.
- Ideal for fast drilling operations in open grained material
- Tungsten Carbide versions have Solid Carbide ends, brazed in and ground to give maximum clearance.
- TCT drills have a 60° taper point and are recommended for hard or abrasive materials.

These drills are not for use with routers and not suitable for masonrv work.



D inch	D mm	OL mm	Product Ref.	HSS	TCT
1/8	3.2	65.0	501/18	£2.75	-
-	4.0	74.0	501/4	-	£13.00
5/32	3.96	74.0	501/532	£2.75	£13.50
3/16	4.76	88.0	501/316	£3.75	£14.00
-	5.0	85.0	501/5	-	£13.50
7/32	5.55	93.0	501/732	£4.25	£15.00
-	6.0	92.0	501/6	-	£14.00
1/4	6.3	92.0	501/14	£6.00	£15.50
-	7.0	109.0	501/7	-	£16.50
9/32	7.14	111.0	501/932	£10.75	£17.00
-	8.0	116.0	501/8	-	£17.00
5/16	7.9	117.0	501/516	£8.00	£18.50
11/32	8.73	124.0	501/1132	£10.00	£19.00
-	9.0	120.0	501/9	-	£19.00
3/8	9.5	134.0	501/38	£12.50	£20.00
-	10.0	138.0	501/10	-	£23.00
-	11.0	150.0	501/11	-	£24.50
7/16	11.11	144.0	501/716	£17.00	£24.00
-	12.0	150.0	501/12	-	£26.00
1/2	12.7	158.0	501/012	£24.00	£31.00

Dowel Drills

Lip and Spur - Long Series

- These have 2 lips, 2 spurs and a centre brad point.
- TCT versions have tapered spurs. The complete drill head is made from Solid Carbide.

- TCT drills are recommended for hard or abrasive materials
- Flutings are backed-off to give a radial relief and assist chip clearance.
- These groups of dowel drills are used mainly for drilling cross grained timber and particle board.

These drills are not for use with routers and not suitable for masonry work.




		144.0	301/110	217.00	227.00
	12.0	150.0	501/12	-	£26.00
	12.7	158.0	501/012	£24.00	£31.00
•					
	D inch	D mm	Product Ref.	HSS	TCT
	IIICII				
	-	3.0	4001/3	£1.75	-
	1/8	3.2	4001/32	£1.75	-
	-	3.5	4001/35	-	£19.00
	-	4.0	4001/4	£2.25	£17.00
	-	4.5	4001/45	-	£20.00
	3/16	4.75	4001/475	£2.75	-
	-	5.0	4001/5	£2.75	£19.50
	7/32	5.5	4001/55	£2.75	£21.50
	-	6.0	4001/6	£2.75	£20.50
	1/4	6.35	4001/635	£2.75	-
	-	6.5	4001/65	-	£26.00
	-	7.0	4001/7	£2.75	£23.00
	-	8.0	4001/8	£2.75	£22.50
	-	9.0	4001/9	£3.25	£25.50
	3/8	9.5	4001/95	£3.25	£28.00
	-	10.0	4001/10	£3.25	£30.50
	-	11.0	4001/11	£4.75	£38.00
	-	12.0	4001/12	£7.00	£38.00
	1/2	12.7	4001/127	£7.00	£35.50



Router Drilling See page 72 for full details.	trend [®] _{HW}
Ref. 61 Group	

All prices are exclusive of VAT



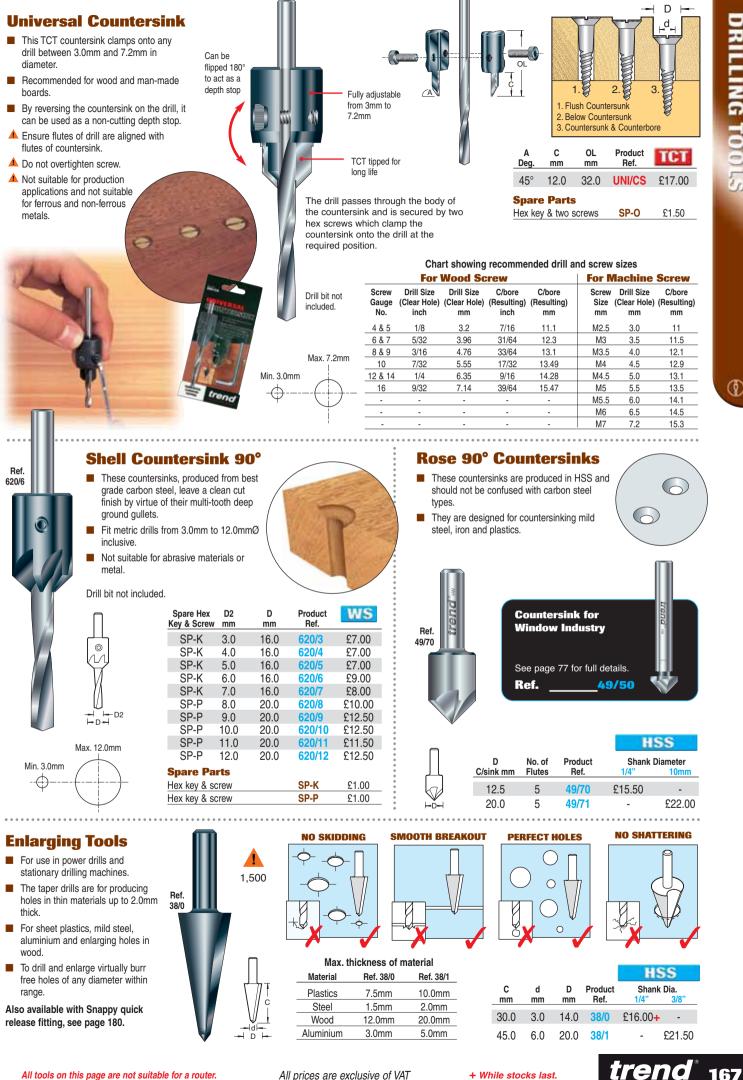

RILLING TOOLS

٢

DRILLING TOOLS


stationary drilling machines. Stepped drills are ideal for use with plastic, metal and wood for enlarging a smaller hole. The maximum thickness is determined by the length of step.

 Hole deburred at same time.
 Also available with Snappy quick release fitting, see page 180.


Stepped Drills

For use in power drills and



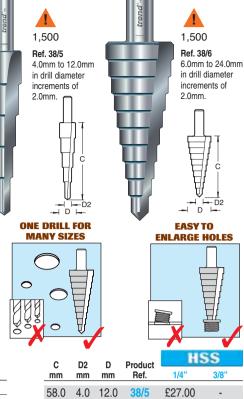

63.0 6.0 24.0

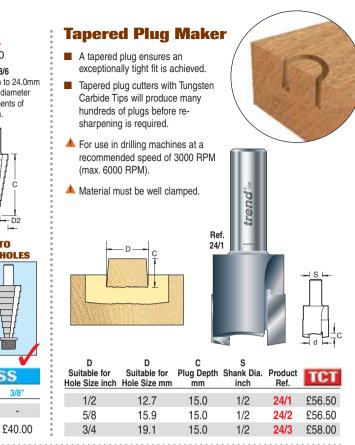

Max. thickness of material per step <u>Material Ref. 38/5 Ref. 38/6</u> Platian 10.0

Plastics	10.0mm	5.0mm
Steel	10.0mm	5.0mm
Aluminium	10.0mm	5.0mm

Counterbore Sets

- The CB counterbores are extensively used for recessing bolt and screw heads.
- Supplied complete with a HSS slow spiral drill bit.
- Fully adjustable, a hex key is supplied.
- The TCT version is used for plywood, particle boards and plastics (abrasive).
- ▲ Use at drilling speeds only.
- Not suitable for ferrous and nonferrous metals.
- When setting-up, ensure flutes of drill are aligned with flute of counterbore. For replacement Twist Drills, use slow spiral type, e.g. Refs. 501/532 to 501/012.

Countersink Sets

- They are designed to drill and countersink simultaneously, a wide variety of materials.
- Supplied complete with a HSS slow spiral drill bit.
- Fully adjustable, a hex key is supplied.
- The TCT version is used for plywood, particle boards and plastics (abrasive).
- Use at drilling speeds only.
- Not suitable for ferrous and nonferrous metals.
- Please ensure drill flutes are aligned with flutes of countersink. For replacement Twist Drills, use slow spiral type e.g. Refs. 501/18 to 501/716.
- Sizes No.4 and No. 6 have a shouldered body.

168 treng	
------------------	--

D c/bore Dia. inch	D c/bore Dia. mm	D2 Drill Size inch	D2 Drill Size mm	Product Ref.	HSS	TCT
3/8	9.5	5/32	3.96	CB38-532	£18.50	£23.50
3/8	9.5	3/16	4.76	CB38-316	£18.50	£23.50
1/2	12.7	3/16	4.76	CB12-316	£18.50	£24.50
1/2	12.7	1/4	6.35	CB12-14	£19.00	£25.50
5/8	15.9	3/16	4.76	CB58-316	£16.00	£25.50
5/8	15.9	1/4	6.35	CB58-14	£19.00	£26.00
5/8	15.9	3/8	9.5	CB58-38	£22.50	£28.00
3/4	19.1	1/4	6.35	CB34-14	£22.50	£27.00
3/4	19.1	5/16	7.9	CB34-516	£23.50	£28.00
3/4	19.1	3/8	9.5	CB34-38	£23.50	£29.00
7/8	22.2	1/4	6.35	CB78-14	£24.00	£31.00
1	25.4	3/8	9.5	CB1-38	£29.00	£31.50
1	25.4	1/2	12.7	CB1-12	£38.50	£44.00
1-1/8	28.6	1/2	12.7	CB118-12	£47.50	£48.50
Spare I	Parts					

£1.75

£1.75

38/6


Hex key & screw	SP-U


Wood Screw Size No.	D Dia. inch	D Dia. mm	D2 Drill Dia. inch	D2 Drill Dia. mm	Product Ref.	HSS	TCT
4	1/2	12.7	1/8	3.2	6200/4	£11.50	£19.00
6	1/2	12.7	5/32	3.96	6200/6	£11.50	£17.00
8	5/8	15.9	3/16	4.76	6200/8	£11.50	£18.50
10	5/8	15.9	7/32	5.55	6200/10	£12.50	£19.00
12	5/8	15.9	1/4	6.35	6200/12	£12.50	£19.00
14	3/4	19.1	9/32	7.14	6200/14	£17.00	£24.50
16	3/4	19.1	5/16	7.9	6200/16	£15.50	£22.50
18	1	25.4	11/32	8.73	6200/18	£17.50	£28.00
20	1	25.4	3/8	9.5	6200/20	£20.50	£29.50
22	1-1/8	28.6	7/16	11.1	6200/22	£23.50	£33.50
Snare	Parte						

Hex key & screw

No.6	Screw = 3.0mmØ = 3.5mmØ = 4.0mmØ	No.10 No.12	


SP-U

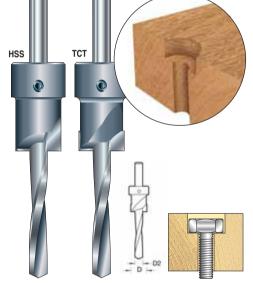

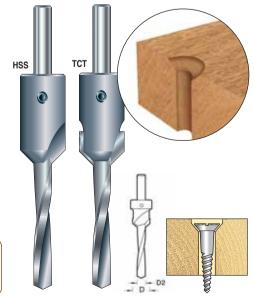


DRILLING TOOLS

٢

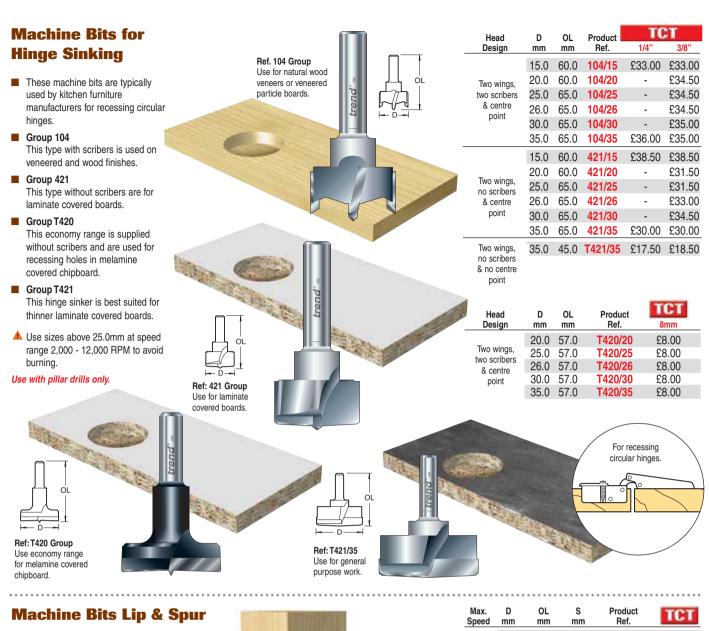

Ref. 1004/32

- These machine bits have two wings, two scribers and a centre point.
- Tungsten carbide tipped for extensive drilling of particle boards, and plastics of soft to medium density.
- The scribes give a very clean entrance hole.
- Not for use on hard dense materials, such as laminate covered board, phenolic Tufnol[®], Wareite[®] and GRP. For such materials, choose from Group 421 tools which have no scribers.
- 🔺 For use in drilling machines only.

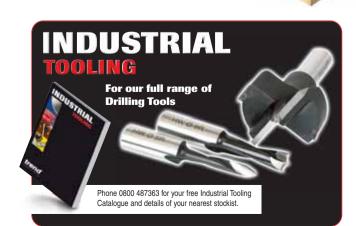

	Speed	mm	mm	mm	Ref.	101
		10.0	90.0	10.0	1004/10	£19.50
		11.0	90.0	10.0	1004/11	£19.00
		12.0	90.0	10.0	1004/12	£20.00
		13.0	90.0	10.0	1004/13	£29.50
		14.0	90.0	10.0	1004/14	£29.50
	_	15.0	90.0	10.0	1004/15	£29.50
	10,000 RPM	16.0	90.0	10.0	1004/16	£30.50
	В	17.0	90.0	10.0	1004/17	£30.50
	õ	18.0	90.0	10.0	1004/18	£30.50
	10,	19.0	90.0	10.0	1004/19	£30.50
		20.0	90.0	10.0	1004/20	£30.50
		21.0	90.0	10.0	1004/21	£29.50
		22.0	90.0	10.0	1004/22	£31.00
		23.0	90.0	10.0	1004/23	£31.00
		24.0	90.0	10.0	1004/24	£31.00
		25.0	90.0	10.0	1004/25	£31.00
		26.0	90.0	10.0	1004/26	£31.00
		27.0	90.0	10.0	1004/27	£33.00
	M	28.0	90.0	10.0	1004/28	£33.00
	В	29.0	90.0	10.0	1004/29	£33.00
	6,000 RPM	30.0	90.0	10.0	1004/30	£33.00
	è,	31.0	90.0	10.0	1004/31	£33.00
		32.0	90.0	10.0	1004/32	£33.00
-		34.0	90.0	10.0	1004/34	£33.50
		35.0	90.0	10.0	1004/35	£33.50
		36.0	90.0	10.0	1004/36	£33.50
OL	N	38.0	90.0	10.0	1004/38	£38.00
	3,000 RPM	40.0	90.0	10.0	1004/40	£38.00
,	00	45.0	90.0	10.0	1004/45	£54.00
1	3,6	50.0	90.0	10.0	1004/50	£59.00
4		55.0	90.0	10.0	1013/55	£88.50
		60.0	90.0	10.0	1013/60	£102.50



Saw Tooth Forstner Bits

Saw Tooth Forstner bits are made from high grade Carbon Steel and meticulously heat treated. 1306 Group Long series

1307 Group Short series

- They cut fast, with the grain or across it.
- They can drill overlapping holes in any direction and are chosen for exacting and delicate work, such as scroll and scalloping operations.
- A Not for use with routers.

						- An	B	
Short Se	eries		Lo	ong Se	ries	1 all	1	
D Dia. inch	Overall Length	Product Ref.	WS	D	D Dia. inch	Overall Length	Product Ref.	W
3/8	3-1/2	1307/38	£12.00		3/8	4-3⁄4	1306/38	£12
1/2	3-1/2	1307/12	£12.00		1/2	4-3⁄4	1306/12	£13
5/8	3-1/2	1307/58	£13.50		5/8	4-3⁄4	1306/58	£14
3/4	3-1/2	1307/34	£14.00		3/4	4-3⁄4	1306/34	£15
7/8	3-1/2	1307/78	£15.50		7/8	5	1306/78	£17
1	3-1/2	1307/1	£17.00		1	5-1/4	1306/1	£18
1-1/8	3-1/2	1307/118	£20.50		1-1/8	5-1/4	1306/118	£21
1-1/4	3-1/2	1307/114	£22.50		1-1/4	5-1/4	1306/114	£24
1-3⁄8	3-1/2	1307/138	£23.50		1-3⁄8	5-1/2	1306/138	£24
1-1/2	3-1/2	1307/112	£28.00		1-1/2	5-3⁄4	1306/112	£28
1-5⁄8	3-1/2	1307/158	£30.50		1-5⁄8	5-3⁄4	1306/158	£36
1-3⁄4	3-1/2	1307/134	£34.00		1-3⁄4	6	1306/134	£36
1-7/8	3-1/2	1307/178	£38.00		17⁄8	6	1306/178	£40
2	3-1/2	1307/2	£38.00		2	6	1306/2	£41

Max.

2000

1500

1500

1000

1000

800

800

800

800

500

500

500

500

400

Speed RPM Dia. inch

D Plug

3/8

1/2

5/8

3/4

7/8

1

1-1/8

1-1/4

1-3/8

1-1/2

1-5/8

1-3/4

1-7/8

2

No. of

Wing

4

4

4

4

5

5

5

5

5

5

6

6

6

6

Plug Makers

- Precision made plug makers for use on natural timber, exactly matching the holes produced by the Saw Tooth Forstners groups 1306 & 1307.
- These have four to six wings to ensure a clean cut.
- Use a slow, constant feed rate ensuring timber is clamped to bed of drilling machine.
- 5-1/2" to 6-1/2" overall lengths.
- ▲ Do not use these tools on abrasive timber or hard plastics or metal.
- Not suitable for use with a router.
- Not for use with hand held power tools or routers.

Adjustable Machine Bit - Light Duty

- Supplied with two interchangeable blades offering a range of drilling sizes from 15mm to 45mm.
- Made from specially hardened Carbon Steel.
- Suitable for soft timbers only.
- Use at low speeds only.
- A Not for use with hand held power tools or routers.



- D

Blade A

fitted

Ref.

Blade B

fitted

2214/78

Adjustable Drilling Sizes	D min. mm	D max. mm	Product Ref.	WS		
with blade A fitted	15.0	25.0				
with blade B fitted	25.0	45.0	349	£16.00		
Devlessment Devte						

Replacement Parts

Blade A	
Blade B	

Adjustable Machine Bits – Heavy Duty

- These variable diameter drill bits are of heavier construction than Ref. 349.
- Suited for production work e.g. repetitive machining in abrasive materials. Regular checking of hole diameter is recommended however.
- Ref. 3060 is supplied as standard with two variable TCT blades.
- Not for use with hand held power tools or routers.

OL



Product

Ref.

2214/38

2214/12

2214/58

2214/34

2214/78

2214/1

2214/118

2214/114

2214/138

2214/112

2214/158

2214/134

2214/178

2214/2

WS

£38.50

£38.50

£38.50

£44.00

£48.00

£48.00

£50.00

£54.00

£59.00

£65.00

£65.00

£74.00

£74.00

£85.50

Blade A fitted max. speed 3,000 RPM Blade B fitted max. speed 2,500 RPM

 Blade Type	D mm	S mm	OL mm	Product Ref.	TCT
-	30-60	10.0	80.0	3060	£83.50
-	60-80	12.7	80.0	3061	£135.50

Replacement Blades

For 3060					
А	30-45	-	-	SP-3060A	£24.50
В	45-60	-	-	SP-3060B	£27.50
For 3061	60-80	-	-	SP-3061A	£56.50

Replacement Screws

For 3060	-	-	-	SP-3060C	£0.50 (ea)
For 3061	-	-	-	SP-3061C	£0.50 (ea)



SP-349A

SP-349B

£5.00 £6.00



 (\mathbb{D})

SETTE DRILLING TOOL

£60.00 £60.00

£65.50

£60.00

£60.00

£60.00

£60.00

£60.00

£60.00

£65.50

£65.50

£65.50

£65.50


£65.50

£65.50

- The body of the Trend Rosette drilling tool is made from tool steel which accurately supports a pair of removable Tungsten Carbide knives.
- This tool should be used in a standing drill press, mill, lathe or a CNC drilling machine. The wide choice of removable knives (not supplied) allow a variety of rosette patterns to be created in Medium Density Fibreboard (MDF).
- The shank is 1/2" in diameter with three flats for non-slip.
- Knives with outside spurs can be used to cut the rosette free to form a button.

Description	Product Ref.	TCT
Rosette drilling tool body only (no knives). Supplied with wooden box and hex key.	RDT/SET	£100.50



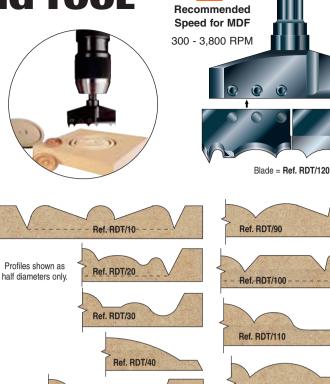

٢

Ref. RDT/130 Ref. RDT/140 Ref. RDT/150

Ref. RDT/120

Spare Parts SP-RDT/A Grub screw

Grub screw	SP-RDT/A	£2.25 (ea)
Hex key	SP-RDT/B	£3.50
Shank only	SP-RDT/C	£20.00



ED SC Н & BOLT REM World Patent App. WO2004002687

Ref. RDT/50

Ref. RDT/60

Ref. RDT/70

Ref. RDT/80

This versatile double-ended bit removes damaged screws, machine screws and broken bolts from wood, metal and plastic. It can remove screw sizes from Nos. 6 - 14 and broken bolts from size M4 - M8.

- Removes cleanly from wood, metal or plastic.
- Hardened tool steel.
- Removes screws made of any alloy including soft brass
- Removes free spinning screws.
- Winslow tip for self centring.
- Double-ended (burnisher & tapered thread).
- Hex shoulder to aid removal of jammed screw or bolt.

GRAB/SE1/SET (Set of 2) £13.00




All prices are exclusive of VAT

Spare Parts

Description	Product Ref.	Price
No. 2	WP-GRAB/SE/2	£8.00
No. 3	WP-GRAB/SE/3	£8.00
Case	CASE/GRAB/1	£6.50



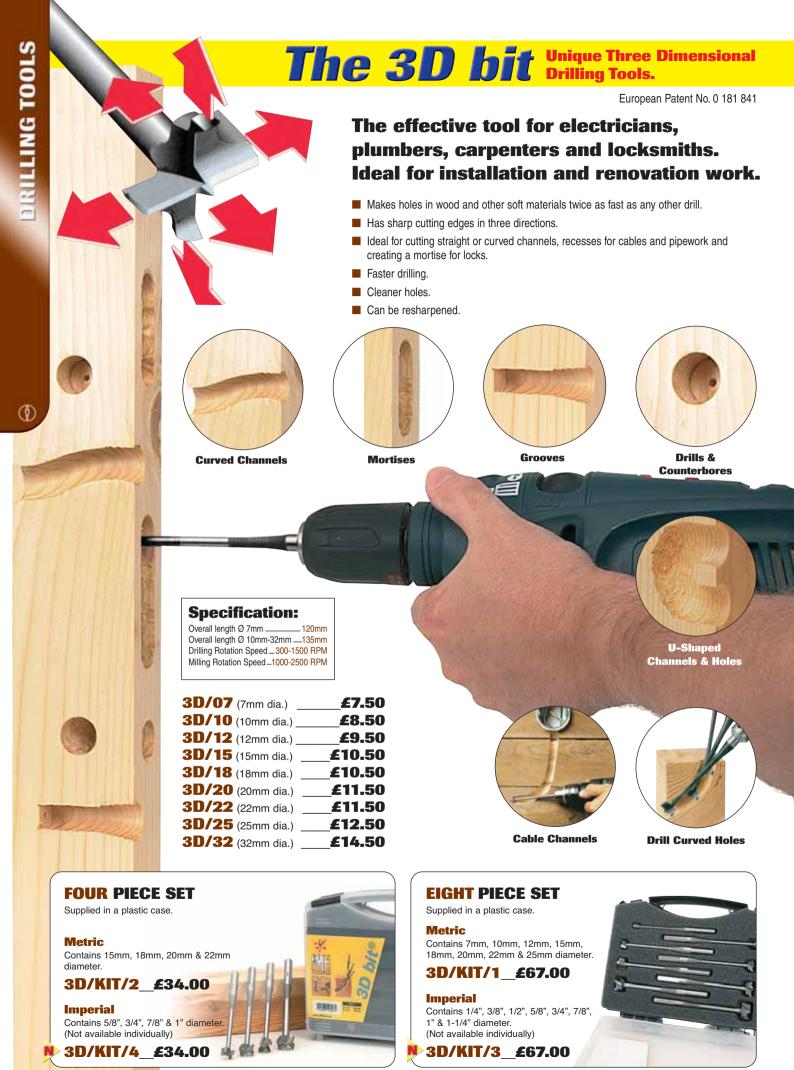



All prices are exclusive of VAT

www.trend-uk.com

Visit:

Snappy RANGE

5 + 5



	SNAP
THE O	UICK RELEASE DRILL SYSTEM
NEW	QUICK CHUCKS & HAND DRIVER 174
OFFLINE	DRILL BITS 175
DRIVER 181	COUNTERSINKS & 175–176
HEAVY DUTY	COUNTERBORES & TTG
TOOL BELT	MACHINE BITS & 177
NEW	FLAT BITS & FORSTNER 178
14" TOTE BAG	AUGERS 178
	RTA STEPPED DRILLS
184 NEW	HOLE & WOOD SAWS, SANDING PADS
104	MASONRY DRILLS, GLASS DRILLS & RACK
NEW 200	MAGNETIC NUT DRIVERS 180
Snappy	STEP REAMERS 180
	STEPPED & TAPERED DRILLS
LIMITED	DE-BURRING COUNTERSINKS
	6MM SHANK ADAPTER 180
	WIRE BRUSHES 180
T50 CORDLESS	HOLDERS, SCREWDRIVER BITS 181–182
IMPACT 185 DRIVER	TOOL HOLDERS 183

 (\mathbf{D})

Snappy

The Quick Release Drill System

- The Snappy range is the most effective way to increase productivity for drilling and fixing.
- For use with power drills and screwdrivers and compatible with direct-drive 1/4" hex shank power bits.
- The spring-loaded Quick Chuck fitted to a drill, enables the Snappy range of tooling to be interchanged quickly.
- The most comprehensive range of quick change tooling on the market.

QUICK CHUCKS



The Snappy system starts with the Quick Chuck. This is fitted into a standard 3/8" key or keyless chuck. Snappy attachments or any direct drive 1/4" hex bits can then 'snap' in effortlessly. Six flats on the shank ensure precise location in the chuck. A sprung-loaded outer sleeve makes it easy to remove attachments.

£9.00

SDS+ SHANK OUICK CHUCK

For SDS plus drills. Hammer action must be switched off when used.

SNAP/QCSDS

SNAP/QC

£12.50



Visit:

DRILLS & COUNTERSINKS

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2.75

£2 75

£2.75

£2 75



5/32" (3.96mm)

3/16" (4.8mm)

1/4" (6.35mm)

1.0mm

2.0mm

3.0mm

4.0mm

5.0mm

6.0mm

7 0mm

7/32" (5.5mm)

into the Quick Chuck.				
ill Sets	Price			
nperial)	£16.50			
(Metric)	£16.50			
Drills				
Product Ref.	Price			
SNAP/D/2	£2.75			
SNAP/D/3	£2.75			
SNAP/D/4	£2.75			
	: Chuck. ill Sets nperial) Metric) Drills Product Ref. SNAP/D/2 SNAP/D/3			

SNAP/D/5

SNAP/D/6

SNAP/D/7

SNAP/D/8

SNAP/D/1MM

SNAP/D/2MM

SNAP/D/3MN

SNAP/D/4MM

SNAP/D/5MM

SNAP/D/6MM

SNAP/D/7MM

DRILL BITS

The HSS drill bits are gripped by a spring steel collet into the

hex shaft. The hex shanks snap



HEX PROTECTOR

The hex collar (as supplied in the sets) enables drills to be removed with two spanners and is available separately.

SNAP/HP __£1.75

£5.50



shank through hole drills for drilling timber, diameters 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm & 6mm. Supplied in storage tube.

SNAP/HD/SET

TAPERED DRILLS

A range of HSS tapered drills for use with the Snappy drill adapters and drill countersinks. Drills pilot and tapered clearance holes for wood screws in one operation. Drill sizes range from 2.0mm - 6.3mm. Replaces the standard drill bits.

Drill Size	Product Ref.	Price
2.0mm (5/64")	WP-SNAP/DT/20	£1.25
2.5mm (3/32")	WP-SNAP/DT/24	£1.25
2.8mm (7/64")	WP-SNAP/DT/28	£1.75
3.2mm (1/8")	WP-SNAP/DT/32	£1.75
3.5mm (9/64")	WP-SNAP/DT/36	£1.75
4.0mm	WP-SNAP/DT/40	£1.75
4.8mm (3/16")	WP-SNAP/DT/48	£2.25
6.3mm (1/4")	WP-SNAP/DT/63	£2.75



Adjustable depth stops to fit Snappy drill countersinks. Two sizes offered 3/8" (for SNAP/CS/4-10) and 1/2" (for SNAP/CS/12) diameter. Supplied with hex key.

Not suitable for metric set.

Product Ref.	Price
SNAP/DS/38	£2.25
SNAP/DS/12	£2.25

DRILL COUNTERSINKS HSS

5 Piece Countersink Set HSS

Heat treated tool steel countersinks with HSS drills. They are adjustable for different length screws and can produce a 9.5mm (3/8") or 12.7mm (1/2") diameter counterbored hole for woodplugs. They are available in five screw sizes. The drills produce pilot holes only. Comprises of 5/64", 3/32", 7/64", 1/8" and 9/64" drill bits.

SNAP/CS/SET £19.50

Individual Drill Countersinks Imperial size Drill Dia 60

Driii Dia.	Scre	W NO.		
mm	S/W	H/W	Product Ref.	Price
2.0 (5/64")	-	4	SNAP/CS/4	£4.50 🔵
2.5 (3/32")	6	-	SNAP/CS/6	£4.50 🔵
2.75 (7/64")	8	6	SNAP/CS/8	£4.50 🔵
3.25 (1/8")	10	8	SNAP/CS/10	£4.50 🔵
3.5 (9/64")	12	10	SNAP/CS/12	£4.50 🔴

Denotes suitable plug cutter size. See Plug Cutters.

Spare Drill Ten Packs

Spare drills to suit drill countersinks above.

Supplied in a storage tube Packs of 10

Product Ref.	Price
SNAP/DB564/10	£9.00
SNAP/DB332/10	£9.00
SNAP/DB764/10	£9.00
SNAP/DB18/10	£11.0
SNAP/DB964/10	£11.0
	Product Ref. SNAP/DB564/10 SNAP/DB332/10 SNAP/DB764/10 SNAP/DB18/10



Snap

 $^{(1)}$



Plug Cutters See pages 176 for full details.

A DESCRIPTION OF
- +-
No. of Lot of Lo
Summer of the local division of the local di
-
ALC: N
185
69
100
111

Tungsten Carbide tipped version of the popular Snappy drill countersink sets with adjustable HSS drill. These tools can be used in abrasive materials such as laminated chipboard. The drills produce	DRILL COUNTERSINKS 5 Piece Countersink Set TCT	The second
pilot holes only. Comprises of 5/64", 3/32", 7/64", 1/8" and 9/64" drill bits.	popular Snappy drill countersink sets with adjustable HSS drill. These tools can be used in abrasive materials such as laminated chipboard. The drills produce pilot holes only. Comprises of 5/64",	

SNAP/CSTC/SET £43.00

Individual Drill Countersinks Imperial size

Drill Dia.	Scre	w No.		
mm	S/W	H/W	Product Ref.	Price
2.0 (5/64")	-	4	SNAP/CS/4TC	£9.00 🔵
2.5 (3/32")	6	-	SNAP/CS/6TC	£9.00 🔵
2.75 (7/64")	8	6	SNAP/CS/8TC	£9.00 🔵
3.25 (1/8")	10	8	SNAP/CS/10TC	£9.00 🔵
3.5 (9/64")	12	10	SNAP/CS/12TC	£9.00 🔴

Metric size

	Drill D	ia. Scre	ew No.		
١	mm	S/W	H/W	Product Ref.	Price
1	3.0	5.0mm	4.0mm	SNAP/CS/3MMTC	£10.00 🔵
	4.0	M4*	M4*	SNAP/CS/4MMTC	£10.00 🔵
/	5.0	M5*	M5*	SNAP/CS/5MMTC	£14.50 🔴
1	6.0	M6*	M6*	SNAP/CS/6MMTC	£14.50 🔴

Clearance hole for machine screw

Denotes suitable plug cutter size. See Plug Cutters

> = 3.5mmØ $= 4.0 \text{mm}\emptyset$

= 5.0mmØ

= 5.5mmØ

SCREW SIZES

No.6
No.8
No.10
No.12



COUNTERBORES & DRILL BIT GUIDES

6.35mm

TET **TCT COUNTERBORES** Five sizes of counterbore with a slow spiral drill fitted. Tungsten Carbide Tipped for use in abrasive materials. C/Bore Drill Dia Dia. Product Ref. Price 1000 9.5mm 4 0mm SNAP/CB/1TC £13.50 SNAP/CB/2TC £13 50 4 75mm 9.5mm SNAP/CB/3TC 4.75mm 12.7mm £14.00 6.35mm 12.7mm SNAP/CB/4TC £14.50 SNAP/CB/5TC 6.35mm 16.0mm £15.50 **Spare Drills** Drill Dia. Product Ref. Price 4.0mm WP-SNAP/D/4C £1.75 WP-SNAP/D/47C 4.75mm £2.25

WP-SNAP/D/63C

£2.75





DRILL BIT GUIDES

Self-centring drills for the accurate drilling of pilot holes for fittings such as hinges to ensure exact alignment. They can be easily dismantled for cleaning and are supplied with a HSS drill bit.

DRILL BIT GUIDE SET

One set comprising a Quick Chuck and the three sizes of Drill Bit Guides sizes 5/64", 7/64" and 9/64", for the accurate fitting of hinges.

SNAP/DBG/SET	£30.50
--------------	--------

Drill Dia.	Screw	Product Ref.	Price
2.0mm (5/64")	No.6	SNAP/DBG/5	£7.50
2.75mm (7/64")	No.8	SNAP/DBG/7	£7.50
3.5mm (9/64")	No.10	SNAP/DBG/9	£7.50
4.36mm (11/64")No.12	SNAP/DBG/12	£16.50

Spare Drills

Drill Dia.	Product Ref.	Price
2.0mm (5/64")	WP-SNAP/D/5L	£2.75
2.75mm (7/64 ['] ")	WP-SNAP/D/7L	£2.75
3.5mm (9/64")	WP-SNAP/D/9L	£2.25
1.36mm (11/64")	WP-SNAP/D/11L	£4.00
Spring (for 5-9)	WP-SNAP/SPR/1	£1.25
Spring (for 12)	WP-SNAP/SPR/2	£2.25
Grub screw	WP-SNAP/GSW/1	£0.75

Spare Drills Five Packs

Spare extra long drills to suit drill bit guides. Packs of 5.

Drill Size	Product Ref.	Price
2.0mm (5/64")	SNAP/DB5L/5	£13.50
2.75mm (7/64")	SNAP/DB7L/5	£13.50
3.5mm (9/64")	🛃 SNAP/DB9L/5	£11.00
4.36mm (11/64")	SNAP/DB11L/5	£19.00

TRADESMAN SETS

These three sets incorporate one of each of the four main lines and are designed for a specific screw size. Each set comprises a Quick Chuck, Drill/Countersink, No. 2 Pozi® bit and Drill Bit Guide. These sets suit screw sizes No. 6, No. 8 and No. 10.

Product Ref. SNAP/NO6/SET SNAP/NO8/SET



SNAP/CSK/1 £9.00

STANDARD PLUG CUTTERS

Made from Tool Steel for cutting plugs in wood in two sizes: 3/8" (9.5mm) and 1/2" (12.7mm) to suit Snappy Drill Countersinks. Recommended for use with a pillar drill.

Plug Size	Product Ref.	Price
9.5mm (3/8")	SNAP/PC/38	£9.00 🔵
12.7mm (1/2")	SNAP/PC/12	£11.50 🔴

TUBE PLUG CUTTERS

Made from Tool Steel they allow for longer plugs to be drilled. Plugs are parallel sided. Recommended for use with a pillar drill.

Plug Size	Product Ref.	Price
8.0mm	SNAP/PC/8T	£12.50
9.5mm (3/8")	SNAP/PC/95T	£12.50 🔵
10.0mm	SNAP/PC/10T	£12.50
12.0mm	SNAP/PC/12T	£14.50
12.7mm (1/2")	SNAP/PC/127T	£14.50 🔴
15.9mm (5/8")	SNAP/PC/16T	£19.50

Drill Countersinks See pages 175 for details.



STANDARD PLUG CUTTER SETS

Plug cutter sets for particular screw sizes. Each set comprises Quick Chuck, Drill/Countersink, Pozi® Screwdriver bit and standard Plug Cutter. These sets suit screw sizes No.6, No.8, No.10 and No.12

SNAP/PC6/SET £23.50
SNAP/PC8/SET £23.50
SNAP/PC10/SET £23.50
SNAP/PC12/SET £26.00



Snappy

Ð

trend 177

DRILLING & BORING TOOLS



SNAP/SS/5MM ____£21.50

 load capacity applies to four shelf supports being evenly distributed. Ref.

holes for 5mm diameter shelf supports. See page 124.

· · · · · · · · · · · · ·

TEMP/SS/A

Vddeu

FLAT BITS

An economical bit for cutting quick holes in timber. They have an 152mm overall length with centre point, back tapered cutting edge and ground chip breakers.

Drill Dia.	Product Ref.	Price
8mm	SNAP/FB/8	£2.75
10mm	SNAP/FB/10	£2.75
12mm	SNAP/FB/12	£3.25
13mm	SNAP/FB/13	£3.25
14mm	SNAP/FB/14	£3.25
16mm	SNAP/FB/16	£3.25
18mm	SNAP/FB/18	£3.25
19mm	SNAP/FB/19	£3.75
20mm	SNAP/FB/20	£3.75
22mm	SNAP/FB/22	£3.75
25mm	SNAP/FB/25	£4.25
28mm	SNAP/FB/28	£4.25
30mm	SNAP/FB/30	£4.25
32mm	SNAP/FB/32	£4.25
34mm	SNAP/FB/34	£4.75
35mm	SNAP/FB/35	£4.75
38mm	SNAP/FB/38	£4.75

3 Piece Set

Three piece set comprising a 16mm, 19mm and 25mm diameter Snappy Flat Bit.

SNAP/FB1/SET _£9.50

NEW **5 PIECE EXTRA LONG FLAT BIT SET**

A five piece extra long 300mm long flat bit set. Diameter sizes are 16.0mm, 18.0mm, 22.0mm, 25.0mm and 32.0mm.

SNAP/FB2/SET £21.50

High quality forged and

5 Piece Boxed Forstner Set Sizes 15mm, 20mm, 25mm, 30mm

Carry-case available separately. CASE/SNAP/3 _____£6.50

SNAP/FS1/SET

& 35mm

£57.00

NEW

FORSTNERS

ground carbon steel short Forstner bits for drilling accurate holes. For use with the Snappy Quick Chuck. They will also drill overlapping holes. They have an 86mm overall length.



Bit Dia.	Product Ref.	Price
10mm	SNAP/FS/10	£9.00
12mm	SNAP/FS/12	£9.00
15mm	SNAP/FS/15	£10.00
16mm	SNAP/FS/16	£10.50
18mm	SNAP/FS/18	£10.50
20mm	SNAP/FS/20	£11.00
22mm	SNAP/FS/22	£11.00
24mm	SNAP/FS/24	£13.50
25mm	SNAP/FS/25	£12.50
26mm	SNAP/FS/26	£13.00
28mm	SNAP/FS/28	£13.50
30mm	SNAP/FS/30	£13.50
35mm	SNAP/FS/35	£14.00

300mm long extension for flat bits. Minimum diameter of flat bit that can be used is 16.0mm. **SNAP/FB/EXT £7.50** Double set screw fixing.

FLAT BIT EXTENSION

STUB AUGER BITS

Short series augers with 105mm overall length, ideal for drilling between joists. Made from high quality carbon steel with screw thread and single spur. They must only be used with torque control drills.

Bit Dia.	Product Ref.	Price
8.0mm	SNAP/SA/8	£3.50
10mm	SNAP/SA/10	£3.50
13mm	SNAP/SA/13	£4.00
16mm	SNAP/SA/16	£4.50
19mm	SNAP/SA/19	£4.50
20mm	SNAP/SA/20	£5.00
25mm 📐	SNAP/SA/25	£6.00
32mm N 🔊	SNAP/SA/32	£7.00
		and the second
	THE REAL PROPERTY.	Smith - Million

8 PIECE STUB NEW **AUGER BIT SET**

Comprising 8.0mm, 10.0mm, 13.0mm, 16.0mm, 19.0mm, 20.0mm, 25.0mm and 32.0mm stub auger bits. Supplied in a fabric tool case.

SNAP/SA1/SET £30.00

AUGER BITS Made from Carbon Steel and

precision machined. Augers have a spiral point, single flute and an overall length of 155mm. They are ideal for quick, clean deep holes. They must only be used with torque control drills to prevent wrist injury.

	Bit Dia.	Product Ref.	Price
	6.0mm	SNAP/AB/6	£5.00
8	8.0mm	SNAP/AB/8	£5.00
	10.0mm	SNAP/AB/10	£5.00
	12.0mm	SNAP/AB/12	£7.00
21	13.0mm	SNAP/AB/13	£7.00
	16.0mm	SNAP/AB/16	£7.50
	19.0mm	SNAP/AB/19	£7.50
	20.0mm	SNAP/AB/20	£8.00
	22.0mm	SNAP/AB/22	£8.00
	25.0mm	SNAP/AB/25	£8.50


٢

178 trend

3 ŝ



ENGINEERING TOOLS

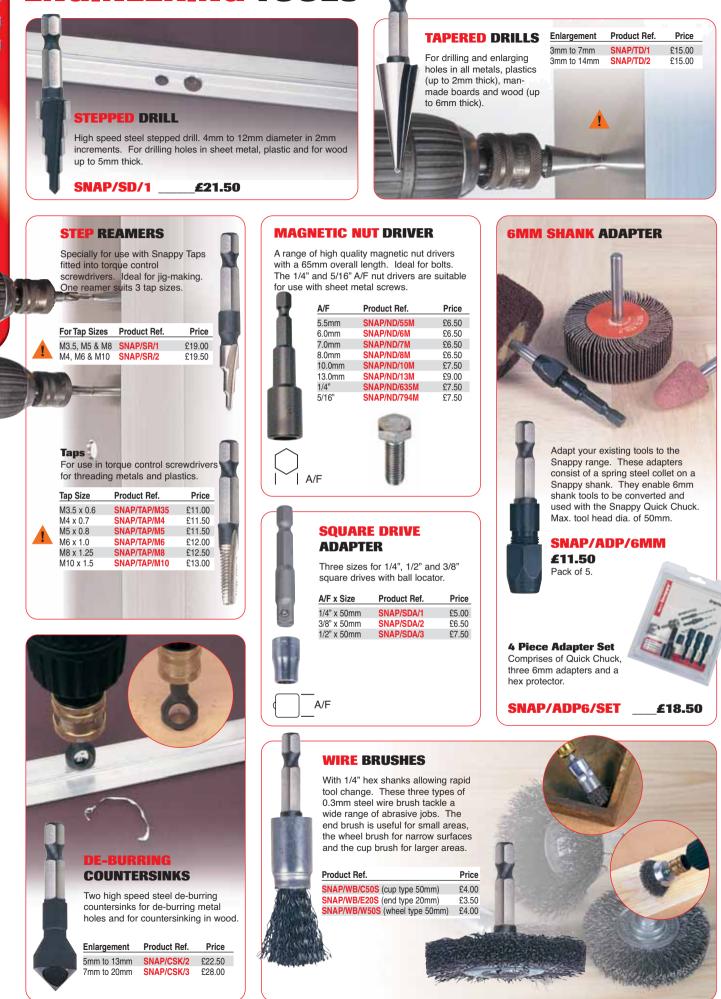



SCREWDRIVER BIT HOLDERS



All prices are exclusive of VAT

trend 181

Snap

Ð

 \odot

SCREWDRIVER BITS



POZI[®] INSERT BIT 25MM

25mm No.2 Pozi® bits. Titanium coated high grade tool steel for extra wear resistance. High resistance to "cam-out".

Size Bits	Qty	Product Ref.	Price
Pozi [®] No. 1	10	SNAP/IPZ1/10	£5.50
Pozi® No. 2	10	SNAP/IPZ2/10	£5.50
Pozi [®] No. 3	10	SNAP/IPZ3/10	£5.50



POZI[®] BITS 50MM

High grade tool steel screwdriver bits, hardened for ultimate wear resistance. The bits have 1/4" hex shanks to fit the Quick Chuck directly.

Size Bits	Qty	Product Ref.	Price
Pozi [®] No. 1	3	SNAP/PZ/1	£5.00
Pozi® No. 2	3	SNAP/PZ/2	£6.50
Pozi [®] No. 3	3	SNAP/PZ/3	£8.00
Mixed pack of above	3	SNAP/PZ/123	£6.00
Pozi [®] No. 4	2	SNAP/PZ/4	£5.50

The No.4 Pozi® bit is ideal for 10mm window anchor and frame fixing screws.

EXTRA LONG POZI®

150mm long Pozi® Screwdriver bits in three

Product Ref.

SNAP/PZ/1A

SNAP/PZ/2A

SNAP/PZ/3A

Price

£5.50

£5.50

£6.50

BITS 150MM

sizes No.1. 2 and 3.

Bit Size

Pozi[®] No. 1

Pozi[®] No. 2

Pozi[®] No. 3



Ð

25mm No. 2 Phillips® bits. Titanium coated high grade tool steel for extra wear resistance.

Size Bits	Qty	Product Ref.	Price
Phillips® No. 1	10	SNAP/IPH1/10	£5.50
Phillips® No. 2	10	SNAP/IPH2/10	£5.50
Phillips [®] No. 3	10	SNAP/IPH3/10	£5.50



PHILLIPS[®] BITS 50MM

High grade tool steel screwdriver bits, hardened for ultimate wear resistance. The bits have 1/4" hex shanks to fit the Quick Chuck directly.

Size Bits	Qty	Product Ref.	Price
Phillips [®] No. 1	3	SNAP/PH/1	£5.00
Phillips [®] No. 2	3	SNAP/PH/2	£6.50
Phillips [®] No. 3	3	SNAP/PH/3	£8.00
Mixed pack of above	3	SNAP/PH/123	£6.00



screwdriver bits, available in 3 sizes.

Size Bits	Qty	Product Ref.	Price
Robertson® No. 1 (3/32")	3	SNAP/SQ/1	£2.25
Robertson® No. 2 (1/8")	3	SNAP/SQ/2	£2.25
Robertson® No. 3 (9/64")	3	SNAP/SQ/3	£2.25
Mixed pack of above	3	SNAP/SQ/123	£2.25



TORX[®] BIT SETS 50MM

Set A includes three 50mm Torx® bits to suit screw sizes M3, M3.5 & M4 and Set B, three bits to suit screw sizes M5, M6 and M8. These two sets can be used with T-Star® Screws.

Size Bits	Product Ref.	Price
T10, T15, T20	SNAP/TX/A	£3.50
T25, T30, T40	SNAP/TX/B	£3.50

n

BALL END HEX BITS 50MM

A range of 50mm ball end hex screwdriver bits. The ball hex allows a working angle up to 20°.

Set A includes three bits 2mm, 2.5mm & 3mm A/F. Set B includes three bits 4mm 5mm & 6mm A/E Set C includes two bits 7mm & 8mm A/F.

Size Bits	Product Ref.	Price
Hex 2.0, 2.5, 3.0mm	SNAP/HEX/A	£9.00
Hex 4.0, 5.0, 6.0mm	SNAP/HEX/B	£9.00
Hex 7.0mm, 8.0mm	SNAP/HEX/C	£9.00

EXTRA LONG PHILLIPS[®] **BITS 150MM**

150mm long Phillips® screwdriver bits in three sizes No.1, 2 and 3.

Bit Size	Product Ref.	Price
Phillips [®] No. 1	SNAP/PH/1A	£5.50
Phillips® No. 2	SNAP/PH/2A	£5.50
Phillips [®] No. 3	SNAP/PH/3A	£5.50

EXTRA LONG SQUARE DRIVE BITS

Two lengths of No.2 Robertson square drive bits. 75mm (3") and 150mm (6") for use with Pocket Hole Jig.

Bit Size	Product Ref.	Price
Robertson® No. 2 (3")	SNAP/SQ/2A	£4.50
Robertson® No. 2 (6")	SNAP/SQ/2B	£5.50

MAGNETIC **SCREWDRIVER BIT SETS**

31 Piece Set

Comprises magnetic holder and 30 assorted 25mm screwdriver bits in a plastic case with belt clip. Includes 3 Pozi®, 3 Phillips®, 4 flats, 10 Torx®, 7 hex & 3 square bits.

SNAP/SB2/SET_£11.50



EXTRA LONG TORX[®] \bigcirc BITS 150MM

150mm long Torx[®] screw driver bits with round shafts. Can be used with T-Star[®] screws.

Bit Size	Machine Screw	Product Ref.	Price
Torx [®] T10	M3	SNAP/TX/10A	£5.50
Torx [®] T15	M3.5	SNAP/TX/15A	£5.50
Torx [®] T20	M4	SNAP/TX/20A	£5.50
Torx [®] T25	M5	SNAP/TX/25A	£5.50
Torx [®] T30	M6	SNAP/TX/30A	£5.50

TORSION FLEX

GROOVES

lith	I-Star®	screws.		
rew	Proc	duct Ref.	Pr	ice
	SNA	P/TX/10A	£5	.50
	SNA	P/TX/15A	£5	.50
	SNA	P/TX/20A	£5	.50
	SNA	P/TX/25A	£5	.50
	SNA	P/TX/30A	£5	.50





Comprises magnetic holder and 6 assorted 25mm screwdriver

bits in a plastic case/handle.

Pozi® bits feature a unique

torsion zone to prevent the

SNAP/SB1/SET+

possibility of breakage

7 Piece Set

£8.00

HEAVY DUTY FABRIC TOOL HOLDERS

Heavy duty fabric tool holders available with assorted Snappy tools or empty. Two sizes are offered with elastic pockets to hold Snappy shanks. Sets and empty tool holders are also supplied with a Snappy pencil. Tool holders have a belt strap and are Velcro[®] fastening.



IMPACT DRIVER TOOL HOLDER 60 PIECE SET For use with cordless impact drivers

11111111111

Masonry drill 5mm, 6mm, 7mm & 8mmØ

- Stub auger 10mm & 13mmØ
- No.2 Pozi® 150mm Screwdriver bit
- Hex drill 1.5mm, 2mm, 2.5mm, 3mm, 4mm,
- 5mm & 6mmØ Magnetic nut driver 5/16", 8mm, 10mm
- & 13mm A/F
- Flat bit 16mm & 20mmØ
- 50mm Screwdriver bits (Phillips®, Pozi[®], Torx[®] & Square) 25mm Screwdriver bits
- (Phillips[®] & Pozi[®])
- Square drive adaptor 1/4", 3/8" & 1/2" A/F
- Magnetic bit holder with retractable barrel

1 day 1

60 PIECE SET Contents:

- Standard Quick Chuck 1x
- Masonry bits 5mm, 6mm, 7mm, 8mmØ <u>4x</u>
- Drill bit guides No.6 & No.8 21
- Drill 1mm, 2mm, 3mmØ, 4mm, 5mm, 6mm 71 & 7mmØ
- 24 Auger bits 10 & 13mmØ
- Flat bits 16mm, 19mm, 22mm, 25mm & **5**x 30mmØ
- Drill countersinks 2.5mm, 3.25mm & **3**x 3.5mmØ
- Deburrer/countersink **1**x
- Hole enlarger 1x
- Square drive adapters 1/4", 3/8", & 1/2" A/F 3x
- Screwdriver bits Pozi® No. 1, 2, & 3 3x

SNAP/TH2/SET

- Magnetic nut drivers 6mm, 8mm, 10mm, & 4x 12mm A/F
- Insert bits for Magnetic bit holder (including 23x 5 slotted 3 Pozi®, 3 Phillips®, 6 hex & 6 Torx[®])

HOLDERS				Tools	Tools
Product Ref.	Size mm	Screw Pouch	Belt Strap	up to 155mm	up to 80mm
FIUUUULI NEI.	111111	FUUCII	Suap	15511111	00111111
SNAP/TH/1	140 x 165	1	1	10	7

300 x 165

2

20

15

1

No. of	No. of
Screwdriver	Quick
Insert Bits	Chuck
12	1
23	2

£79.00

SNAP/TH/2



Price

£10.00

£8.00

Snapp

Hanging

holes

1



- 6 pockets for boxes of screws.
- Numerous pockets for quick release drilling tools.
- Holds two cordless drills with charger and spare battery.

SNAP/TOTE/1 _____£27.00

Size: 355mm (14") x 190mm (7-1/2") x 190mm (7-1/2") Tools and accessories not included.



Six screw pockets



Interior battery pouch





Interior pocket for long bits

60 piece tool holder pocket to accept accessory tool holder.



Useful built-in magnet

Screwdriver loop

Insulation tape clip

shoulder strap



Exterior loops for bits



All prices are exclusive of VAT

T50 12V CORDLESS IMPACT DRIVER

Ideal for use in the workshop or on site for light trade work.

- Sustained torque and up to 3,000 impacts per minute for hard joint screwdriving.
- Metal gearing for efficient power transmission.
- Soft grip.
- Compact design.
- Forward and reverse variable speed switch with electronic brake.
- Supplied with a 60 minute guick charger and two 2.0Ah Ni-MH batteries.
- Easy access to brushes.



£169.00

UK & Eire only

Includes:

- 1 x 60 Minute Charger
- 2 x Batteries 12v 2.0Ah Ni-MH
- 3 x 50mm Pozi^{*} Screwdriver Bits
- Storage Case 1 x

Specification:

_ Rating		Light Trade
Voltage UK a	& Eire	12v
No load spe	ed: (min.)	0-2300 rpm
		0-3000 ipm
Maximum to	rque	160Nm
Tool holder		1/4" (6.35mm) hex
Screw size:	Mechanical	M4-M8
	Standard	M5-M12
	High tension	M5-M10
Weight (excl	. battery)	1.04kg
Battery		
		Ni-MH
Voltage		12v
Capacity		2.0Ah
Charger		
	e	230v
		45W
		12v, 1.8A
		60min





WHY AN IMPACT **DRIVER?**

Impact Drivers can reach much higher torgues when compared to a traditional drill. High torques require higher current load which will drain the battery more quickly. Impact Drivers have no kickback and do not need operator to push the driver. This means less fatigue.



Ouick Change Chuck



0-3000 Impacts per **Minute for** Large Screws



Accepts a variety of Quick Change



Tooling



SNAP

trend

£10.75

£4.00

£0.50

£27.00

trend 185

Replacement Parts:

Switch 12v

WP-T50/003

Snappy

MP GUIDE SYSTEM

Patent No. US6.622.997

For accurate guiding of routers, saws and jigsaws. Integral clamping jaws and a locking lever provide a quick way of clamping the guide batten.

NEW FEATURE

Sliding jaw has 'click' feature that allows the jaw to move freely without the metal clamp jaws catching and marking the clamp rod.

Finger Grips for moving

adjustable jaw. Adjustable jaw has 'click' feature.

Extra long handle

45mm wide extrusion

T-Slot track for fitting accessories

Scale included as standard

Locking Lever

		N.C. C. C.
18-2 TO PART 1 1-1		All CGS clamps will accept router base plates, saw base plates, end stop blocks and the Optional Accessories below.
CGS/12 Ideal for drill presse	305mm (12")	£28.00
CGS/24		
CGS/36	915m (36")	£37.50
CGS/50	1270mm (50	") £43.00

Minimum Jaw Clamping 12mm

Workpiece

Attachment points for fitting optional jaw accessories, see below

ICAL





Sawing Use the clamp guide for accurate sawing or jig sawing of boards.



Marking Out Ideal for marking out wide boards, using a square to ensure 90°.

Routing

Fixed Jaw

Tightening lever

trend

3. 1. P. 1. 1. 1. 1.

Open 🔿

Tightest -


Tight (

The ideal guide for routing grooves and stopped grooves. The low profile of the clamp ensures that the handles of the router are not obstructed.



Gluing Up More versatile than a sash clamp or G-clamp.

	Spares	-	-			
aring	Metric Scale For slide fit type clamps (pre-2006).					
system to be curately. Facility to as a marker.	(pre 2000).		110000000000000000000000000000000000000			
£19.50			mmin			
_£19.50 £19.50	Description	Product Ref.	Price			
	Description for CGS/12	Product Ref. CGS/MS12+				
			£2.00			
	for CGS/12	CGS/MS12+	£2.00 £2.00			
	for CGS/12 for CGS/24	CGS/MS12+ CGS/MS24+	£2.00 £2.00 £2.50			
	for CGS/12 for CGS/24 for CGS/36	CGS/MS12+ CGS/MS24+ CGS/MS36+ CGS/MS50+	£2.00 £2.00 £2.50 £3.00			



Jaw Extension An extension jaw for kitchen worktops which fits the existing fixed jaw.

Optional Accessories for CGS & CGS/PRO only

CGS/03 £4.25



Horizontal Pressure

that can be locked in position

along the clamp. Can be used

on router tables, drill stands etc.

Feather Board



squared up more acc Secured to fixed jaw. add a batten for use

CGS/SQA + (pre-2006) CGS/SOA (post-2006)



CGS/01_£6.00

All prices are exclusive of VAT



All prices are exclusive of VAT

+ While stocks last.

CLAMPING SYSTEMS

A concise range	of F-Style quick ac ety of clamping app	tion gripper		
grip o	wable pad to provide n work surfaces and e work piece marking. Groove in bar to allow sliding head to move more smoothly i covered in dust.	f to pre	Soft grip hand better grip an clamping forc plated steel bar event rust.	d more e. <u>s</u> tter when
Cast s O Max. Opening	teel fixed head. D Max. Throat Depth	sliding head. S Size of Steel Section	under clamp press	Price
200mm (8") 300mm (12") 500mm (20")	100mm (4") 100mm (4") 100mm (4")	27 x 7.5mm 27 x 7.5mm 27 x 7.5mm 27 x 7.5mm	FC/200 FC/300 FC/500	£11.50 £13.50 £15.50

Spare Parts WP-FC/SJP £0.50 Sliding jaw pad (round).



- R -



Ideal for securing workpiece either onto jigs or to the surface of the machine.

188 trend

SIONAL S ng workpiece or to the					10	and H and	
Description	Force kg	E mm	A mm	B mm	Product Ref.	Price	_
Small Toggle Clamp Medium Toggle Clamp Large Toggle Clamp	75 150 250	30 50 65	105 160 205	36 53 65	H75 H150 H250	£12.00 £15.00 £21.50	
0 00 1							Ξ,





END SOCKET CLAMP

Ideal for obstruction-free working. A 9mm hole is first drilled in the template jig on to which the workpiece is to be clamped. Minimum material thickness 18mm. Application below shows clamps recessed into a jig to hold component D2 for trimming to shape.






PUSH-PULL CLAMP

Visit:

Ideal for securing workpiece against a back stop on a jig.

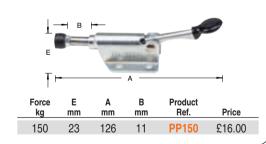



To download Test Reviews, Spare Parts & Instruction Manuals

www.trend-uk.com

All prices are exclusive of VAT

LUBRICANTS 💸 OUTTER CLEANING 🔇

LUBRICANTS, CUTTER CLEANING & ADHESIVES



TRENDICOTE™*****

Dry Lubricant PTFE Spray

- Dry lubricant spray to increase sawblade and router cutter life.
- Invaluable for preventing build-up of resins on metal table surfaces, sawblades and metal tooling.
- Does not contain silicone.



RUST BUSTER™∗

Rust Protector and Lubricant Spray

- Protects cutting tools against rust.
- Cleans thoroughly to penetrate and loosen rusted components.
- Penetrating and lubricates to stop squeaking.
- Drives out water on metal surfaces.
- Frees sticky mechanisms, un-jams and lubricates.
- Ideal for spraying onto router cutter shanks and sawblades to prevent rust.



For Health & Safety Information

www

Visit:

www.trend-uk.com

TRENDIWAXTM

Wax Lubricant

- Extends sawblade life by keeping blade cool at cutting points.
- For use when sawing aluminium.
- Use at regular intervals.
- Apply directly onto the teeth of a stationary blade.



RESIN CLEANER

Spray-on resin remover & cutter cleaning liquid

- Simply spray on and wipe off.
- Supplied in pump action dispenser.
- Ideal for sawblades, router bits, planer blades and drill bits etc.
- Corrosion inhibiting agent prevents rusting of blades whilst being cleaned.
- Liquid has dissolving properties that quickly and harmlessly removes caked on resin.

RESIN/100 (100ml) **RESIN/600** (600ml)

£17.50

£8.50

-

RESIN/2500 (2500ml) £30.50

Supplied with a separate pump action dispenser.

HAZARD CODE: IRRITANT (Xi)

RUST

ADHESIVE MITRE GLUE KIT*

- A two part instant adhesive system
- Bonds mitres in 10 seconds.
- Can be used for bonding of MDF, rubber, PVCu, metals & most plastics.
- Two part adhesive system.
- Instant bonding properties, dramatically reduces assembly time for mitre joints.
- Comprising a cyanacrylate adhesive & aerosol activator to create instant mitre joints.

MB/KIT

(200ml activator & 50gm adhesive)

£12.00

(HAZARD CODE: HIGHLY FLAMMABLE (F) IRRITANT (Xi)







190 trend

MEASURING & MARKING

٩

PERFECT BUTT™

Design Reg. 3014615

The world's fastest professional worktop scriber tool. It completes traditional scribing chores with precision, speed and ease.

- Quick and easy to use by remaining stable whilst scribing directly onto work-surfaces, flooring, shelves etc.
- It works by running a wheeled scribe unit along an irregular feature.
- The sprung pencil in its centre will accurately copy the profile directly onto the work-piece to be installed.
- It can then be cut and fitted to the surface resulting in a perfect butt!
- Five sizes of quick fit track wheels to cope with a variety of situations.

M/PB01





The Multiscribe is a profile matching tool used to transfer contours from one shape to another and mark on to various materials.

MS/PRO



Compass The drawing of circles with various diameters.

MEASURING TAPE

£31.50

Profile Scribe The drawing of an equidistant line parallel to a chosen edge.

45° Mitre Marks a line at 45° to a given straight or flat surface.

Workton **Scribing Facility**

Includes:

1 x 18mmØ Wheel 1 x 29mmØ Wheel

1 x 50mmØ Wheel

1 x 70mmØ Wheel

1 x 90mmØ Wheel

1 x Body **1 x** Pencil

T-SQUARE

Made from solid laminate provides an instant means of squaring off, marking out, settingup jigs etc.



trend 191

AFTER

15 functions including parallel scribe, convex scribe, contour profile scribing and line block.

- Multi-function tool for a variety of marking out applications.
- For use by all trades, carpenters, joiners, builders etc.
- Built in spirit level and pencil sharpener.
- Steel blade with 5mm & 1/4" graduations for profiling.

All prices are exclusive of VAT

£45.50

Nylon coated anti-glare 19mm

wide x 5 metre long bladed tape

with rubberised body, bump

stop cushion and brake. Features dual imperial and

clip and wrist strap.

£3.00

metric scale and has a belt

MT/5X19





ANGLE GAUGE

Enables external and internal

Divides top angle in two without changing the setting.

Ideal for measuring angles when mitre cutting large boards, fillets

and architraves.

A/GAUGE

angles to be read direct from a

Patent Pending

scale.


SOLID DIAMOND WHETSTONES



A range of diamond surfaced stones for sharpening, deburring or honing a wide range of tools.

- Requires less time.
- Unique construction process.
- Five year guarantee.
- Fine & coarse grades.
- Continual diamond surface.
- Diamond precision flatness, as used in the British aerospace industry.





3" DOUBLE SIDED POCKET STONE

A double-sided fine pocket stone. Ideal for small tools. Supplied in a wallet.

DWS/P3/FF



£12.50 Size: 87mm x 25mm x 0.7mm

Grade

• •



A double-sided fine/coarse credit card size stone, ideal for fluted, small and shaped router cutters, woodturning and carving tools. Supplied in a wallet.

£19.50

Construction

sharpening and finer finishing.

DWS/CC/FC Size: 86mm x 54mm x 0.8mm

SIDED STONE



Grade

• •

Why Trend Diamond?

SILICON CARBIDE (SIC)

IGSTEN CARBIDE (WC)

VICKERS SCALE

SILICON DIOXIDE (SE HIGH SPEED STEELS (HSS) OFT STEELS

INIUM OXIDE (Ceramic, Al2Os)

DIAMOND

5" DOUBLE SIDED POCKET STONE

A double-sided fine/coarse thin pocket stone for sawblades, chip limiter router cutters, small tools and carving tools. Supplied with a fabric tool holder and cleaning block.



£29.50 Grade • •

SINFN

DOUBLE

SIDED

7" x 2-1/2" DOUBLE SIDED **BENCH STONE**

A double-sided fine/coarse 2-1/2" wide bench stone, ideal for plane irons and chisels. Precission flatness enables sharpening of Euro block knives. Supplied with a fabric tool holder, cleaning block and non-slip mat

DWS/B7/FC £87.50

Size: 178mm x 63.5mm x 9.5mm PRECISION Grade FLAT • • **⁺**∕- 0.0005"

8" x 3" SINGLE SIDED WORKSHOP STONES

A single-sided workshop Stone. Ideal for up to 3" plane irons and chisels. Supplied with a leather pouch, cleaning block and nonslip mat. trend

£82.00 DWS/W8/F Size: 203mm x 76mm x 6.3mm

DWS/W8/C £82.00 Size: 203mm x 76mm x 6.3mm



File length 93mm x 6mm diameter. Outer body becomes handle. Supplied in a wallet

DWS/PFR/F (143mm x 11.3mm)

Fast: Hardest material. The most

Easy: Light pressure produces an

Clean: Use with Trend lapping fluid to

prevent rusting or clogging. Oils are

materials including Tungsten Carbide

Durable: Stays flat & has a long life.

efficient sharpening abrasive.

Versatile: Sharpens all hard

& High Speed Steel

edge in seconds.

too thick.

£29.50

Grade

Grade

٠

PRECISION

FLAT

+/- 0.0005

- **Grade/Grit** FINE
- Leaves a razor edge in a few strokes.
- Ideal for Cabinet Making, Carving & Tungsten Carbide tooling.
- 600 grit on P3, CC & P5 (nom. 25 micron).
- 1000 grit (nom. 11 micron) on B7 & W8F
- COARSE
- General joinery, HSS tooling, reshaping & rapid removal.
- 350 grit (nom. 42 micron).

Types of Diamond



Trend: Monocrystalline diamond (Element 6 Diamond) is a single structure which does not break with use. It has an exceptional lifespan.

Other Brands: Polycrystalline diamond is a fragmented compound that breaks and wears away rapidly.





Monocrystalline diamonds bonded through an electroless process to a

Continuous diamond surface prevents diamond and nickel lift giving more

precision ground pre-plated nickel carbon steel (EN43A) base.

Double-sided, offering two grit sizes in one stone, allowing coarse

effective anti-corrosion and prevents 'snagging' on smaller tooling.







HARMFUL (Xn)



DWS/NM/B7	£2.00
For 7" & 8" bench stone.	-
Cleaning Block	-
DWS/CB/A	_£1.50
For all stones.	



£10.00

DWS/SP/8

For 8" worktop stone.

trend° 193



NEW IMPROVED

Now can be used with lapping fluid

honing system giving quaranteed razor fine edges every time.



Guaranteed 25° or 30° sharpening angle.

- Easy to use with no set up time required.
- Safe simple quick to use.
- Unique lateral sharpening action gives superb finished edge.
- Built to last. Machined in solid aluminium and anodised.
- Quick change magnetic lock diamond sharpening hones.
- Carriage runs on nylon 66 slip rails for a smooth action.
- fine edge prolongs tool life.
- Optional accessory stones available.



Hones square edged chisels and plane blades from 1/8" (3mm) to 2-1/2" (64mm).

sharpening angle 25° primary and 30° secondary

blade remains stable when sharpening.

hones with a 2 year guarantee.

FTS/KIT £53.00

- **1 x** Preparation stone 220grit
- **1 x** Finishing stone 450grit

Preparation stone 220 grit (black) _£10.00 Finish stone 450 grit (white) £10.00 **Optional Accessory:** Fine finish stone 600 grit (red)



FTS/S/FF £10.00 **Roughing stone**

90-120 grit (silver) FTS/S/R _£10.00

stone 1200 grit (green) N FTS/S/SFF £10.00

CUTTER & COLLET CARE KIT*

This kit contains all the essential accessories to maximise the life of your cutters, collets and router.



- 1 x Mini-Diamond Sharpening Stone
- **1 x** Water Bottle
- 4 x Brass Brushes
- 1 x 60ml Trendicote™
- 1 x 60ml Rust Buster™



CCC/KIT∗ £19.50

EXTREMELY FLAMMABLE (F+) IRRITANT (Xi)





ROUTING BOOK

Complete Routing by Alan Holtham, an essential read for the amateur or the experienced router user.

- Full of easy to read routing techniques and step by step guides on how to use your router to its full potential.
- A4 hardback with over 296 pages.
- With only a little experience you will soon be using the router to transform both the making and the detail of all your woodworking projects, but do be warned, it can become seriously addictive!











ROUTING ON DVD & VHS

All DVD and VHS video running times stated are approximate.



DVD/RS/BR £19.50 **Roy Sutton's**

Basic Routing (DVD) Covers safety, care & selection of cutters, straight work with the side fence, use of the quide bush, cross-grain grooving, recessing for fittings etc. (45 mins)



Roy Sutton's Basic Spindle Moulding (DVD) Routing Jigs & Gadgets Straight moulding of small components,

raised panel work, circular saw on the spindle, straight fence shaping, combjointing, tenoning, profile scribing, power feed & circular work using a ring fence & bearing ring. (45 mins)



Roy Sutton's Getting Started with your Router (VHS or DVD)

Guides the newcomer safely through the basics of routing & gives confidence to use the router effectively. (32mins)



Jeremy Broun's Joint Cutting with the Router (VHS)

Cut a range of interesting joints using both shop-made & selected manufacturers jigs. (45 mins)



Roy Sutton's Advanced Routing (DVD)

Fixed head routing, stair housing, dovetailing, tongue & groove jointing, profile scribing, jointing worktops etc. (35 mins)



Roy Sutton's Making (DVD)

Basic principles of jig & template making & tools. Includes cross-grain routing, the tenoning-jig, comb-jointing & table routing. Useful router adaptions are shown, Drawings of various projects included. (55 mins)



Alan Goodsell's The Router A Beginner's Guide (VHS)

Demonstrates the techniques, the tools & the accessories to unleash the full potential of woodworkings most versatile . tool. (67 mins)



Jeremy Broun's Essential Routing (VHS) Basic principles, cutter choice, getting started, safe working practices, holding devices, template routing etc. (46 mins)



Roy Sutton's Safe Wood Machining (DVD)

Basic operating principles & safe working techniques for radial arm saw, sawbench, planer thicknesser, mortiser, tenoner & spindle moulder. (45 mins)

DVD/RS/DR



£19.50 Roy Sutton's Developing the Router Workshop

(DVD) Techniques such as profile scribing, panel raising, biscuit jointing, finger jointing, dovetailing, the Ellipse Jig, Routerlathe, Router Carver & Pivot Frame Jig. Also several holding devices for special applications. (53 mins)



Jeremy Broun's Router Jigging (VHS)

Basic principles of jigs & jigmaking. Featuring selected commercial jigs & shop-made jigs. (35mins)



Jeremy Broun's Three Pack (VHS or DVD) Includes Router Jigging, Joint Cutting with the Router & Essential Routing.

TREND PRODUCTS **ON DVD & VHS**

Routing **Products for** the Tradesman (DVD)

lotham

Packed full of solutions that will save you time and money with your router. Shows how to fit door hinges and locks effortlessly, install kitchen worktops with ease, gain access to under floor pipes and cables cleanly and how best to use the Trend Professional Routing Table. (11 mins. No region code).

DVD/TRADE £5.50

Diamond Sharpening (DVD)





DC400 Dovetailing Centre (VHS) Features the DC400 Dovetail Centre,

giving a step by step guide to construct a simple drawer using through and lapped dovetails. (22 mins).



Mortise & Tenon Jig (VHS)

Features the new Mortise & Tenon Jig, showing a step by step process to create an elegant chair. (22 mins). **TV/10**

£10.00

trend° 195



COURSES & EDUCATIO

TREND CLOTHING



ROUTING COURSES

Trend sponsor a number of course centres running one or two day routing courses, both basic and advanced. Full instruction is provided on a wide range of Trend products, including hands free routing, safety and maintenance.

GIFT VOUCHERS

Give a woodworker or DIY friend or relative, the freedom &

Vouchers are supplied in a presentation sleeve and are redeemable at participating Trend stockists for any Trend product. They can be ordered on our internet site, or from participating



CHICHESTER COLLEGE Westgate Fields Chichester West Sussex PO19 1SB Tel: 01243 786321 Contact: Christian Notley

R&R SIGNS & CRAFTS Hill Top, 2 Quebec Road Thorpe Hamlet Norwich Norfolk NR1 4AU Tel: 01603 610247 Contact: Ray London Email: ray180756@aol.com www.ray-routing.freeuk.com

EDINBURGH'S TELFORD COLLEGE 350 Grafton Rd Edinburgh EH5 1QE Tel: 0131 559 4000 Contact: Keith Swan

GOOD TIMBER New Creation Farm Furnace Lane Nether Heyford Northamptonshire NN7 3LB Tel: 01327 344550 Contact: Fred Zimmerman

ISAAC LORDS 185 Desborough Road High Wycombe Bucks HP11 20N Tel: 01494 462121 / 01494 835200 Contact: Cliff Rayner

П

G

Visit:

NEATH PORT TALBOT COLLEGE Dwr-y-felin Road Neath Wales SA10 7RF Tel: 01639 648038 Contact: Stephen Fowler

ROUTING CRAZY 9 Marls Road Botley Southampton Hampshire SO30 2EY Tel: 01489 783176 / 07957 267647 Contact: Tony Chalk

AMMANFORD COLLEGE Ammanford Campus Duffryn Road Ammanford Carmarrthenshire SA16 3TA Tel: 01554 748317 Contacts: Dylan James

SUPA ROOFING & POWER TOOLS LTD Aller Mills Kingskerswell Newton Abbot Devon TQ12 5AU Tel: 01803 873288 Contact: Peter Griffiths

TURNERS RETREAT Brunel Ind Est Harworth S. Yorks DN11 8QA Tel: 01302 744344 Contact: Bill Reese

MACKAYS OF CAMBRIDGE LTD 85 East Rd Cambridge Cambs CB1 1BY Tel: 01223 517000 Contact: Peter Graves Email: routing.courses@mackay.co.uk www.mackay.co.uk

WOODCRAFT TRAINING SERVICES

Stockton Business Centre Brunswick Street Stockton On Tees TS18 1DE Tel: 07788 585824 Contact: Ian Coning www.woodcrafttrainingservices.co.uk

YANDLES OF MARTOCK Hurst Works Martock Somerset TA12 6.IU Tel: 01935 822207 Contacts: Mike Sandells





For more information www.trend-uk.com/courses

OUR WEBSITE treno WITH NEW FEATURES Professional Routing Solutions We have recently updated our 1 website with improved navigation & comprehensive information on every product. All products will soon be available to buy on-line with a same day despatch. Bookmark our site in your web browser & make a regular visit. www.trend-uk.com and the second s TRADE CUT -110 rend PTFE cout Google (TTP) rograin 10

Our website also features:

- A facility to locate your nearest Trend stockist in the UK, USA and Ireland and details of our overseas distribution network.
 - A comprehensive Knowledge Base covering all aspects of routina.
 - A variety of routing projects for all levels.

NEW

- The latest news from our product development and marketing departments.
- Details of our sponsored course centres around the UK.
- A glossary section for commonly used routing terminology.
- Compatibility of our products with all makes of routers.
- List of diary dates on forthcoming open days and exhibitions.

em

n

Instruction manuals, spares diagrams, test reviews, video clips, and other free literature to download.

plates

Imhers

TEMPLATES **BY NUMBERS**

AIRSHIELD PRO

An On-line Template Calculation System

- On-line service that can help you to make templates to suit your Trend router cutters.
- Offers mortise, dovetail, cabinet templates and more.
- Calculates your size of guide bush.

enc

s trend

Quick and easy with actual size template plan.

How it works

1. Select

You select the type of template and answer the questions on template size and features.

Calculate 2.

The dimensions are calculated for a customised template plan.

Print 3.

You print off an actual sized template plan.

For more information Visit: www.templatesbynumbers.com/trend



If your product becomes defective due to faulty materials or workmanship within 12 months of purchase, we guarantee to replace all defective parts free of charge, or at our discretion, replace the unit free of charge provided that: Proof of date of purchase is provided. The product has not been misused, abused or improperly maintained and has been used in accordance with the instructions. No unauthorised repair or modification has been made to the product. Service and/or repair of power tools and machinery is carried out by an authorised Trend Service Agent. The product was not stolen or is a counterfeit copy.

Please note: This guarantee is personal to the original purchaser and is not transferable. The guarantee is in addition to and does not affect audition to and does not anect contractual rights as a professional user or your statutory rights as a private non-professional user. Customers must ensure that the product is suitable for the purpose intended before use. Trend cannot be held liable for any products or unauthorized service of any product unauthorised service of any products of we also cannot be held liable for material rendered unusable or any form of consequential loss

The information in this catalogue is for general guidance purposes only. You are responsible for determining whether it applies to your particular application. Before using our products users must read and understand all safety legislation and refer to the Provision and Use of Work Equipment Regulations (PUWER). Before using our products please read and understand all instructions provided and also refer to our Safety section in this catalogue on page 102. Trend accessories must not be put into service until it has been established that the power tool being used is in compliance with 98/37/EC (identified by the CE marking).

ENVIRONMENTAL We are committed to reducing the impact of our products to the environment through design and process. The re-use of recycled materials reduces the demand for raw materials and helps prevent environmental pollution. Packaging and used products should be sorted for environmentally friendly recycling. We comply with all applicable laws and regulations and strive to minimise waste generation. re-use and recycle materials generation, re-use and recycle materials where possible. Please see our website for more information and also

www.recycle-more.co.uk

Recycle raw materials instead of disposing as waste.

Accessories and packaging should be sorted for environmental-friendly recycling.



Separate collection. This product must not be disposed of with normal household waste

Household User

Local regulations may provide for separate collection of electrical products from the household, at municipal waste sites or by retailer when you purchase a new product. Please call Trend Customer Services for advice as to how to dispose of unwanted Trend electrical products in an environmentally safe way or visit www.trend-uk.com

Business User

Please call Trend Customer Services for disposal of unwanted Trend electrical products.

© 2009 Trend Machinery & Cutting Tools Ltd. All rights reserved. No part of this publication may be reproduced or transmitted without prior permission. Trend reserves the right to revise product specifications at any time without notice. Colours may vary E&OE. ® All Trademarks Acknowledged.



	ITEM	UNIVERSAL SUB-BASE	CIRCULAR SUB-BASE	SQUARE SUB-BASE	ELLIPSE JIG ADAPTOR PLATE	PRO ROUTER TABLE	CRAFTSMAN ROUTER TABLE MK2	TREND DOVETAIL JIGS	N-ROUTER COMPASS	LARGE ROUTER COMPASS	ROUTA BOUT	PRO RO B/
ROUTER MAKE	ROUTER PART MODEL NO.	UNIBASE	GB/5 GB/5/S	GB/PLATE GB/PLATE/S	ELLIPSEJ/3	PRT	CRT/FP/A-D	CDJ300, 600 DC400 MT/JIG	N/COMPASS/A	R/COMPASS/A	RBT M/RBT	CGS
	-	PAGE 142	PAGE 143	PAGE143	PAGE 136	PAGE 116	PAGE 117	PAGE 118 - 120	PAGE 135	PAGE 135	PAGE 122 - 123	PAC
TREND	T3 T4 T5, T5MK2	5	5	1	:	××	A A	1	1	1	11	
	T9 T10, T11	5	55	1	-	5	A A A		××	<i>''</i>	1	
AEG	OF450S, OFE710 OF500S	×	××	X	:	××	A	1	1		1	
ATLAS COPCO		X	×	×	-	×		1	1		1	
	OFS50, 720, OFSE850, 1000, OFSE2000	×,	× L	× S	i		A A D	Ŭ	×		Ű	
AXMINSTER	AW635R AW127R	× ×	× S	Š	<u> </u>	Ě	A	GB/5/S	×		1	
BLACK & DECKER	SR100 BD780(E), KW779, 780(E) KW800(E)	X X X	X X X	X	:	×	A A	1	1		1	
	KW800(E) KW850ET	× ×	××	X	1	×.	AA	1	1		5	
BOSCH	POF400A, POF52, 500A, 600ACE	1	B	თათთია		××	A A B	U U	× ×		U	
	POF52,500A,600ACE POF1300ACE,1100ACE GOF900A(CE) <2003 GOF900A(CE) <2003 GOF1300ACE,GMF1400ACE GOF1300ACE,GMF1400ACE GOF1300ACE	<i>s</i> <i>s</i>	₽₽%%%%%	S	:		B				U	
	GOF1300ACE, GMF1400ACE GOF1600A, 1700ACE	<i>s</i> ,	ss.∕	SS∕	-		B B A	ŬŬ	×××		Ŭ	
CASALS	GOF2000CE FT750, 1000E	×	S				× D	GB/5/S	×		GB/5/S	
CHALLENGE	FT2000VCE	1	Ē	S S	•		D	Ŭ	××	•	Ŭ	
(ARGOS)	1020W EXTREME MR5757	× ×	××	××	:	×	A A	1	1		1	
CHAMPION (FOCUS)	CPR850 CR1010	× ×	×s	× S	i	×	A A	GB/S/S	1		GB/5/S	
CLARK CMT	CR1 CMT1E	×	×	S 🗸	-	×	A	√ U	√ ×		√ U	
CMT	CMT2E	1	5	1	:	1	A	7	××	1	9	
DEWALT	DW613, 614, 615 DW620, 621	5	5	1	:	1	A	, v	1	1	U	
DRAPER	DW624, 625EK, 629 R850V	×	×	X	-	×	A A D	U	×		U	
	R1900V PT1200V	5	× L ✓	×S✓		×	DA	U V	×	,	ÿ	
	EOF850SP	×	×	×	-	×	A	1	1		1	
ELU	MOF69 MOF96(E) Mk2 OF97(E)	1	1	1	:	X	A A A		X	1	/ / U	
	MOF131, 177(E) Mk2	5	~	~	1	1	A	Ŭ	×	1	1	
ERBAUER FESTO	ERB RT3 OF900E,1000E,1010EBC	×	S	S S	-	•=	A• A•	GB/5/S	×		GB/5/S	
(FESTOOL)	OF1400E OF2000E	×	SSS	S S S			Â	GB/5/S	x x		GB/5/S	
FERM	FBE-6F	×	×S×	SSS	· ·	×		GB/5/S	1		GB/5/S	
FLEX	FBF1050E, 1200 FBF-8E OFT2926VV	×××			ROD/8	××	Â	GB/5/M	X X X		GB/5/M	
	OFT3121VV	××	S M	S S			X	×	×		X	
FREUD	FT1000(E) FT2000(E)	5	L	SS		•	D	U	×		Ŭ	
FELISATTI	TP246(E) R346EC	5	S ✓	S ✓		•	A	V	××	7	V	
HITACHI	FM8, ZK2008 M8, M8V	5		S S	7	×	A	U	1		UUU	
	TR12 M12V. M12SA	1	S S D D S	ິດຮູ້				X	×		Ŭ	
HOLZHER	M12V2 2335, 2336, 2356	×	S X	Š X	-	O	A	GB/5/S	×		GB/5/S	
JCB	PR1217 PR12,1216	×	×SP	SS	-	×	A	· ·	1		, ,	
	PR1200, 1105	×	-	S		•	A	GB/5/P	×	•	GB/5/P	
KANGO KINZO	R855OS 25C44	×	×	× S	-	• •	A• A ■	GB/5/S	×		✓ GB/5/S	
	25C44 25C46EP	X X	SS	SS		e	Â	GB/5/S GB/5/S	××		GB/5/S GB/5/S	
KRESS LYNX	FM6955 RT-800-A	X X	× S	× S	-	×	A• A•	GB/5/S	√ ×		✓ GB/5/S	
MAFELL	L050E L065E	× ×	S	S	:	×	A• A•	GB/5	××		GB/5	
MAKITA	RP0910, 1110C	1				1		U	1	1	U	
	3620 3612BR 3600B	5	✓ A A	~ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ ഗഗ					X		UUUU	
METADO	3612C, 3612	5	A J					Ŭ	××		Ŭ	
	OF528, 1028, OFE1229 OF1612, OFE1812	5	S S	S S	-	×		UUU	×		U	
NU-TOOL	NPT850, 102, HP6, MNPC900 XP12	××	×SS	× S S		×		GB/5/S	× ×		GB/5/S	
PERFORMANCE	NPK1802 NLE 1020R	×		×		×		GB/5/S			GB/5/S ✓	
PRO (B&Q)	FMTC1020R CLM1250R <11/03 CLM1250R >11/03	X X X	X P	× S ✓	-	×		GB/5/P	J X		GB/5/P	
	CLM1250R >11/03 CLM2050R,TTECHTT/R127,COD1500R CLM1250RD (fixed base)	55	5555	1	1		A A A		× × ×		UUUUU	
	CLM12/R	1		1	1	1	A	Ŭ		1	Ŭ	
PEUGEOT PERLES	DEF570E, DF55E OF808(E) <99	✓ ×	D X	s x		×	D A	U V	×		U ✓	
	OF808(E) <99 OF808(E) >99, 2-808(E) OF9(E)	5	X J	1	:	1	Â		1	7	1	
PORTER-	100	×	M M M	S		×	××	GB/5/M GB/5/M	×		GB/5/M GB/5/M	
	690, 693, 9290 7539, 7538 7519, 7518	X X X	M	ທູດອີດອີດອີດອີດອີດອີດອີດອີດອີດອີດອີດອີດອີດ		×	X	×	X X		x x GB/5/S	
POWERBASE	7529, 97529 1020W	× ×	M		-	×	A• A•	GB/5/M	×		1	
(HOMEBASE)	EXCEL 1250W PBX 1500RT	××	× S S	× S S	_		Â	GB/5/S GB/5/S	×		GB/5/S GB/5/S	
POWER DEVIL	PDW5026 PDW5027, 5037PRA	×	××S	×	:	××	A	1	1		1	
POWER DULLO	PDW5038PR	×		× S			A A	GB/5/S	×		GB/5/S	
POWER PLUS	X091 RE120	X	×	×	-	×	A		×		V	
	R150, 151, 155, RE155K	55	S S F F	თიიიიიი				l ü			Ŭ	
	R500 R502 R600, RE600	1	Α	S			A A B	Ŭ	×××		Ŭ	
	R600, RE600 R600N, RE600N, RE601 ERT1500W, RE180PL	<i>S S</i>	A S S	S			B A A	GB/5/S GB/5/S	×××		GB/5/S	
SILVERLINE	762170, 783111, AT3305, 911523	× ×			-	×		1	1		GB/5/S	
	464910 1835U	X	× S	× S		•	A• A•	GB/5/S	×		GB/5/S	
SKIL	1875U1	5	SS	S		×	D	Ŭ	××	•	Ŭ	
SPARKY STAYER	X52E PR50	√ ×	S X	S X	-	×	A• A•	U	×		U ✓	
TRITON	TRB001	×	Q	S		-	A●	GB/5/Q	×	-	GB/5/Q	
VIRUTEX	FR77C, 78C FR66F	× ×	××	××	:	×	A A	1	1		1	
	900W	×	×S	×s		×	A	GB/5/S	√ ×		1	



LETTER BOX LB/JIG TEMP/LB/A PAGE 125 X X X Y	COMBI66, 600 COMBI66, 600 COMBI 1002 KWJ900	STAIRJIG STAIR/A	ELLIPSE	MINI ELLIPSE	PIVOT FRAME JIG	HINGE JIG	ROUTER CARVER (with suitable	GUI BUSI GB10	HES 0-32	DRAINING GROOVE JIG	
PAGE 125	COMBI 1002 KWJ900						collet ftted)	GB			
PAGE 125	KWJ900	STAIR/B	ELLIPSE/JA	ME/JIG	PFJ/SET/1	HINGE/JIG H/JIG/75	RCCX8MMTC RCCX1/2TC	SUB-BAS		DG/JIG	LOCK/JIG TEMP/LR/A
×××✓	PAGE 126 - 128	PAGE 124	PAGE 136	PAGE 136	PAGE 135	TEMP/BH/A PAGE 130 - 131	PAGE 134	GB/5 PAGE 143	UNIBASE PAGE 142	PAGE 129	PAGE 132
×	X	×	ROD/8 ROD/8	1	1	1	×	5	1	×	×
	××	× × ✓ ✓	1	× ×	×	U X	8mm 1/2 1/2	5555	555	××	X
×	×	×××	1	1	×	×	8mm	5 5 5	1	X	×
×	×		1	1	1	5	8mm 8mm	1	5	X	×
Û	Û	×	ELLIPSE/J3	×	×	X	8mm 1/2	GB/5/L	Ŭ	Ŭ	Û
×	GB/5/S	×	×	ELLIPSE/J3	×	×	8mm 1/2	5	1	GB/5/S	×
X X X	X X X	×××	\$ \$	55	5 * 5 * 5 *	555	8mm 8mm 8mm	5	X V	X X	X X X
×	X	×	✓ ELLIPSE/J3 ELLIPSE/J3	1	×	V U	8mm X	✓ GB/5/B	J U	X	X
X	×	× × ×	ELLIPSE/J3	×	X X* √	UUU	X 8mm	GB/5/B GB/5/S	Ŭ	X X X	×
××	× ×	Ê.	ROD/8 ROD/10 ROD/10 ELLIPSE/J3		X	U X	8mm 8mm 8mm	GB/5/S GB/5/S GB/5/S	U U U	ŭ	X
GB/5/S	GB/5/S		ELLIPSE/J3	× × ×	×××	××	1/2" 1/2"	GB/5 GB/5/S	×	GB/5/S	GB/5/S
Ŭ	Ŭ	×	ELLIPSE/J3 ELLIPSE/J3	×	××	U X	8mm 1/2"	GB/5/L GB/5/L	UUU	Ŭ	Ŭ
X X	X X	××	1	1	٠ *	5	8mm 8mm	1	1	××	××
× ×	× ×	×	ROD/8 ELLIPSE/J3	1	√ ×	GB/5/S	8mm 8mm	GB/5/S	√ ×	×	×
×	×	X	1	✓ ×	√* ×	√ ×	8mm 1/2"	✓ GB/5	√ U	X	×
۲ ×	✓ ×	y y X	1	×	××	××	1/2" 1/2" 8mm	GB/5	1	×	×
× U	×	×	\$ \$	5 5 X	s s x	U X	8mm 8mm 1/2"	GB/5 GB/5	Ŭ	x	Ŷ
××	××	×	ELLIPSE/J3	×	1	> × >	8mm 1/2"	GB/5/L	ý	××	××
×	×	×	1	- J - J	J J *		8mm 8mm	1	J J	×	×
X X	××	X	1	1	1	1	X 8mm	5	1	X	X
Ŭ	Ŷ	×××	1	5 5 X	××	v V X	8mm 1/2"	GB/5 GB/5	Ů	Ŷ	Ŭ
GB/5/S	GB/5/S	×	ELLIPSE/J3 ELLIPSE/J3	×	×	X	1/2" 8mm	GB/5/S GB/5/S	×	GB/5/S	GB/5/S
GB/5/S	GB/5/S	Ê	ELLIPSE/J3 ELLIPSE/J3	××	×××	××	1/2" 1/2"	GB/5/S GB/5/S	GB/5/S	GB/5/S	GB/5/S
X X X	X X X	× × ×	ROD/8 ELLIPŞE/J3	-	×	GB/5/S	x 8mm	GB/5/S	×	X X X	×××
GB/5/M	GB/5/M	×	ELLIPSE/J3	×	×	×	8mm X	GB/5/M	GB/5/M	GB/5/M	GB/5/M
GB/5/M	GB/5/M X	×	ELLIPSE/J3 ELLIPSE/J3	×	×	×	× 8mm	GB/5/M GB/5/L	X U	GB/5/M	GB/5/M
Ŭ	UU		ELLIPSE/J3 ELLIPSE/J3	×	×	×	1/2" 1/2"	GB/5/L GB/5/S	Ŭ	Ŭ	Ŭ
×	ر ۲	✓ ×	ROD/8	× √ √	×	X U U	×	GB/5/S	UU	×	X
×	×	×	RÓD/8 ELLIPSE/J3 ELLIPSE/J3	×	×	X	x 1/2" 1/2"	GB/5/S GB/5/D	Ŭ U U	, X	×
GB/5/S	GB/5/S		ELLIPSE/J3 ELLIPSE/J3	×××	×	××	1/2"	GB/5/D GB/5/S	GB/5/S	GB/5/S	GB/5/S
X	×	×	ROD/8	1	1	5	8mm X		<i>,</i>	x	x
GB/5/P	GB/5/P		ELLIPSE/J3 ELLIPSE/J3	××	××	×	8mm 1/2"	GB/5/S GB/5/P	GB/5/P	GB/5/P	GB/5/P
x GB/5/S	× GB/5/S	×	ELLIPSE/J3	1	××	GB/5/S	8mm X 1/2"	✓ GB/5/S GB/5/S	××	X GB/5/S	x GB/5/S
GB/5/S	GB/5/S	×	ELLIPSE/J3	×	×	×	1/2" 8mm	GB/5/S ✓	×	GB/5/S	GB/5/S
X	×	X	ELLIPSE/J3 ELLIPSE/J3	1	×	GB/5/S	8mm 8mm	GB/5/S GB/5/S	XU	X	X
GB/5	GB/5●■	×	ROD/10	X	× ×	×	1/2"	GB/5	×	GB/5	GB/5
××	× ×	×	ROD/8 ROD/8 ELLIPSE/J3	/ / /	5 5 X	Ŭ X	8mm 8mm 1/2" 1/2"	GB/5 GB/5/A GB/5/A	U U U	X	X
Ŭ	Ŭ U		ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3	× × ×	×××	×××	1/2" 1/2"	GB/5/A GB/5/J	Ŭ	Ŭ	Ŭ
Ŭ	Ŭ	Ě	ELLIPSE/J3 ELLIPSE/J3	×	×	U X	8mm 1/2"	GB/5/S GB/5/S	UUU	Ú	Ŭ
X GB/5/S	X GB/5/S	×	ELLIPSE/J3	✓ × ×	×	✓ × ×	8mm 1/2"	GB/5/S	×	× ×	X GB/5/S
GB/5/S	GB/5/S	X	ELLIPŠE/J3	1	۲× ۲	1	1/2" 8mm	GB/5/S	×	1	GB/5/S
K GB/5/P ∎	GB/5/P	ž	ELLIPSE/J3 ELLIPSE/J3	× ×	×	×××	8mm 1/2" 1/2"	GB/5/P GB/5	GB/5/P	××	GB/5/P
Ŭ	Ŭ	1	LLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3	* * * *	****	X	1/2" × 1/2"	GB/5 GB/5	Ū	× × ×	Ŭ
U X	×	√ ×	ELLIPSE/J3 ELLIPSE/J3	× ✓	×	X U	1/2" X	GB/5 D	U √	× ✓	U X
× ×	X X X	×	1	11	\$ \$ \$	5	8mm 8mm	5	1	1	×××
	x GB/5/M	x	ELLIPSE/J3		×	GB/5/M	8mm	GB/5/M	X	X	X
X GB/5/M GB/5/M GB/5/M	GB/5/M GB/5/M GB/5/M		ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3	***	×	×	X X X	GB/5/M GB/5/M GB/5/M	X X X	X	X GB/5/M GB/5/M
GB/5/S	GB/5/S x	×	ELLIPSE/J3	1	×	××	x 8mm	GB/5/M	GB/5/M	X X X	GB/5/M GB/5/M
GB/5/S GB/5/S	GB/5/S GB/5/S	Î	ELLIPSE/J3	×	ý X	××	8mm 8mm	GB/5/S GB/5/S	GB/5/S GB/5/S	GB/5/S GB/5/S	GB/5/S GB/5/S
X X	×	×	ROD/8	1	1	1	x 8mm	1	1	x x GB/5/S	X
GB/5/S	GB/5/S X	×	ELLIPSE/J3 ROD/8	× ✓	×	×	1/2" 8mm	GB/5/S ✓	×	GB/5/S	GB/5/S
X X	×	××	ELLIPSE/J3	1	×	UUU	X 8mm	GB/5/S GB/5/S	UUU	×	×
Ü	Ŭ		ELLIPSE/J3	×	×	××	1/2"	GB/5/F GB/5/F	U	× U	Ü
GB/5/S	GB/5/S		ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3 ELLIPSE/J3	****	****	×××	1/2" 1/2" 1/2"	GB/5/A GB/5/A GB/5/S	U U X	GB/5/S	GB/5/S
X X	x	X	ELLIPSE/J3	1	x x	GB/5/S	8mm	GB/5/S	GB/5/S	X X	GB/5/S GB/5/S
GB/5/S	GB/5/S	×	ELLIPSE/J3 ELLIPSE/J3	×	×	× V	1/2"	GB/5/S GB/5/S	× U	GB/5/S	GB/5/S
Ŭ	Ŭ	×	ELLIPSE/J3	×	××	×	8mm 1/2"	GB/5/S	U	Ŭ	Ŭ
×	×	×	ELLIPSE/J3	J J	×	U V	8mm 8mm	GB/5/S ✓	1	×	×
GB/5/Q X	GB/5/Q	×	ELLIPSE/J3	×	×	×	1/2" 8mm	GB/5/Q ✓	×	GB/5/Q ×	GB/5/Q
x x	X	x x		· /	×	\$ \$	8mm 8mm	<i>s</i> <i>s</i>	1	X	x
GB/5/S	GB/5/S		ELLIPSE/J3	X	X	X	1/2"	GB/5/S	X	GB/5/S	GB/5/S
For EINHEL	LL BOF700, 850E	see BOSCH P	7530V, DRAPER PT OF52 For DIRECT I2 For Mac CALLIS	POWER TP1200R	T see PERFORMA	NCE PRO CLM	1250 < 11/03 F	or CRAFT DBS1	050N see FERM	FBF1050E	v6.0

Compatibility For further info or if your router is not listed in this chart go to www.trend-uk.com/compaitibility This chart shows which routers are compatible with **Trend Routing Jigs &** ROTTER TABLE Accessories, or what additional sub-base ✓ The product will fit the X The product will not fit the Not applicable. The plate or sub-base is not required as the relevant jig will already fit. Router will fit but re-drilling of router base by user required. Router will fit but re-drilling of plate or sub-base by user Trend will supply sub-bases already pre-drilled for an additional sum of £5 Please state make and model of router when ordering pre-drilled Unibase required. + Packing piece required.

is required.

router.

router.

required.

(plus vat).

sub-base.

ROD/8X500 is required.

ROD/10X500 is required.

Mortising option only shown. For lock plate recess operations, a small router can be used, please refer to the Hinge Jig column for compatibility.

For Pivot Frame Jig: * Slight modification to router base to accept lateral fine adjuster.

For Lock/Jig:

ROD/8

ROD/10

KEY

-

One pair of 8mmØ rods ref. One pair of 10mmØ rods ref.

trend 199

PRODUCT REFERENCE INDEX

Product Ref.	Page
2/ All HSS	
2/ All TC	8
3/ All HSS	
3/0 - 3/07 3/08	-
3/08 3/1 - 3/7	
3/8L	8
3/8 - 3/9 3/10 - 3/13	7
3/20L	
3/20 - 3/23	6
3/40L 3/41 - 3/51	88 6
3/55L	8
3/60 - 3/62	6
3/71 - 3/83	7
3/84L	8
3/85	
3D/ All refs 4/ All refs HSS	172 74
4/0 - 4/4	7
4/5L	8
4/5 - 4/22 4/23L	
4/24 - 4/96	7
5/ All refs	
6/ All refs	32
7/ All HSS 7/01 - 7/2	74 59
7/4 - 7/10	29
7/49 - 7/50	32
7/60 - 7/61 7/66	31 29
7/71 - 7/72	_31,59
7/80 - 7/83 7/96 - 7/99	48 69
7D/ All refs HSS	74
7D/ All refs TC	29
7E/ All refs HSS 7E/ All refs TC	74 20
8/10 - 8/30	38
8/40 - 8/44	37
8/51 - 8/53 8D/ All refs HSS	38 75
8D/ All refs TC	
8E/ All refs	47
9/ All refs HSS	75 36
9/0 - 9/03 9/2 - 9/19	30 34
9/20	36
9/41 - 9/42 9/50 - 9/53	23 35
9/55 - 9/57 9/60 - 9/74	39
9/60 - 9/74	35
9/75 - 9/78 9/80	30 37
9/85	35
9/87 - 9/88 9/95 - 9/98	36 37
9A/1	07
9A/2	37
10/ All refs HSS 10/1 - 10/12	75 24
10/20 - 10/21	23
10/20 - 10/21 10/22 - 10/23	71
10/25 - 10/26 10/30 - 10/99	23
10/30 - 10/99 10H/ All refs HSS	75
IUH/ All rets IC	25
11/ All refs HSS 11/1 - 11/5	75 24
11/17 11/20 - 11/41	25
11/20 - 11/41 11/50	24 60
11/60	71
11/60 12/ All refs HSS	75
12/03 - 12/7 12/30B/CL	44 188
12/31 -	44
13/ All refs HSS	75
13/1 - 13/60 13F/ All refs HSS	44 75
13F/ All refs TC	44
14/ All refs	9
15/ All refs	
16/ All refs	60

Product Ref.	Paga
17/ All refs	Page
18/01 - 18/1	
18/15 - 18/18	58
18/19 - 18/20	
18/21 18/22	55
18/23 - 18/24	54
18/25 18/26	55 53
18/30 18/42 - 18/52	60
18/42 - 18/52 18/53 - 18/54	57 57
18/55 - 18/56	49 & 57
18/60 - 18/64	59
18/70 - 18/73 18/80	45 55
18/81 - 18/82	53
18/83 - 18/84 18/90 - 18/93	54
19/ All refs HSS _	30
19/1 - 19/2	46
19/30 19/60 - 19/62	48
20/2 - 20/5	40 & 37 48
20/2 - 20/5 20/20 - 20/30 20/50 - 20/51	23
20/50 - 20/51 21/ All refs	49
21/ All reis 22/01 - 22/03	10 & 00
22/04 - 22/1	58
22/3	47
22/4 22/7 - 22/10	49 58
23/ All refs	43
24/1 - 24/3	168
24/10 - 24/80 25/ All refs	72
26/ All refs	18
27/ All refs	62
28/ All refs	73
30/ All refs 31/02 HSS - 31/2	63
31/101 HSS	67
31/10/See	RS/ All refs
31/02 - 31/22 31/30 - 31/34	26 27
32/ All refs	26
33/1 - 33/22 33/23 - 33/26	65 96
33/30 - 33/32	51 & 91
33/60 34/01	61, 62 & 64 64
34/01 34/03 - 34/5	
34/6	64
34/7	65 64
34/8 34/9 - 34/17	65
34/20	04
34/22 34/33	
34/40	65
34/41 34/90 - 34/92 34/200 - 34/220	64 71
34/200 - 34/220_	02
35/ All refs	63
36/ All refs 37/ All refs	16
37/ All refs 38/0 - 38/1	21 167
38/5 - 38/6	168
39/ All refs	
40/13 - 40/16 40/32	
45/ All refs	47
46/01 - 46/03 46/05	13
46/05	15.17 20
46/06 46/07 46/09	15,17
46/09	18 12
46/010 46/2	13
46/3 - 46/6D	20
46/7/50	21 32
46/7/50 46/7/60 46/8/50	31
46/8/50 46/9/50 - 46/9/60_	32 & 33 31
46/10 46/11 - 46/18	18
46/11 - 46/18	28

Product Ref.	Page
46/19 - 46/23	17
46/29 - 46/30	46
46/32 - 46/33 46/34 - 46/38	31 25
46/39L - 46/39	10
46/40	31
46/41 - 46/43 46/44	30 10
46/46	48
46/47 - 46/49	49
46/50 - 46/52 46/55 - 46/58	45 34
46/60 - 46/67	
46/68 - 46/75	48
46/80 - 46/92	
46/93 46/94 - 46/96	28 18
46/97 - 46/99	28
46/100 - 46/101 46/103 - 46/107	18
46/103 - 46/107	25 28
46/200 - 46/212	17
46/230 - 46/250	48
46/260 - 46/283 46/290	45 46
46/300 - 46/301	40
46/360	25
46/390	10
46/401 46/910	
47/2	
47/3	19
47/4 47/5 - 47/7	21
47/8	
47/20 - 47/50	
<mark>49</mark> /50	77
49/70 - 49/71	167
50/03 - 50/31 50/32 - 50/40	76 77
50/50 - 50/52	76
53/ All refs	9
54/ All refs	11
55/08 - 55/09	11
55/1 - 55/3	
59/ All refs 61/ All refs	21 72
62/ All ref	72
63/ All refs	
84/02	37
84/06 - 84/07	
84/09 84/10	35 43
84/19	37
84/21	38
84/24 84/31	
84/40	
84/45	38
84/47 84/48	41
84/49	37
84/68 84/82 - 84/96	47
86/03 - 86/05 86/06	
86/12	
87/ All refs	22
88/01X1/2TC	31
88/02X1/2TC	40
88/03X1/2TC 88/04X1/2TC	30 36
88/07 - 88/09	35
90/1 - 90/4	40
90/10 - 90/11 90/12 - 90/14	70
90/20 - 90/21	69
90/22 - 90/24	71
90/25 - 90/28	69
90/29 - 90/40 91/1	
<mark>91/1</mark> 91/10	70
91/15 -91/16	71
91/20	70
92/1 - 92/14 92/20 - 92/27	40 41
92/28	71
93/1 - 93/3	42

Product Ref.	Page
93/10 - 93/11	
104/ All refs	160
105/ All refs	109
105/ All reis	73
330 - 331	66
332 - 333	
334	66
337	63
338 - 342	61
343 - 344	67
345 - 348	68
349	170
421/ All refs	169
501/ All refs	166
620/ All refs	167
753	
755	30
765 - 766	
767	25
768	30
865 - 876	22
1004/ All refs	169
1013/ All refs	169
1306/ All refs	170
1307/ All refs	170
2214/ All refs	170
2000 9 0001	170
3060 & 3061	170
4001/ All refs	
6200/ All refs	
06033 - 06864	
10297	150
<mark>2</mark> 49981 - 256303	150
2608570 All refs	150
31566 - 302194	150
50412980 - 5047504	15150
97525 - 94326902	150
A/GAUGE	191
ABSS All refs	15
ACE/ All refs	113
ACR All refs	15
ACR All refs AIR/1 - AIR/BCP/UK AIR/P/1 - AIR/PRO	(113
AIR/P/1 - AIR/PRO	112
AIRWIPE - AIRACE	
AK/564 ANGLEFIX	101
ANGLEFIX ANUT/33/30	190 62
	02
AP/ All refs	
AQ/ All refs B/PACK All refs B1410	100
B14 10	, 16 & 64
B14A10 B1510	100
B1510	, 16 & 64
B21 - B22	10
B22A	_82 & 94
B22C B23	61 9 64
D 7 7 A	10
B23C	95 & 100
B23A B23C B24 B24C	64
B24C	95 & 100
B2510	64
B25A10	, 82 & 94
B25G	18 & 100
B2665	, 68 & 96
B260 B26E	_62 & 64
B26E	18 & 100
B27 - B28 B28C	05 9 100
B29	001 20 CC
B29C	100
B30 - B35	65
B35C - B35GRS	100
B29 B29C B30 - B35 B35C - B35GRS B36 - B38	65 & 67
8386	100
B39 - B43 B63B - B127B B210 - B250	65
B63B - B127B	100
D210 - D230	100
62340 - 62346 8270 - 8280	62 8 6/
B254C - B254G B270 - B280 B300 - B300A	100
BB16	100
BB16 BB19 - BB22 BB22BS	_30 & 62
	100
BB25 - BB34	62

Product Ref. P	age
BB41 - BB43	100
BEAM All refs	137
BJB/100S BOOK/CR	_110 195
BL/ All refs	
BN All refs	100
BR/ All refs	10
BSC/ All refs BUSH/600	_148 126
BW/ All refs	
C001A - C039	81
C040 C041A - C042	82 84
C041A - C042 C043 - C045	
C046 - C048	82
C049	83
C050 - C066 C067 - C070	
C071 - C073	85
C074 - C079	86
C086 - C091	90
C094 - C095 C096 - C105	88 0
C106	85
C107 - C111	89
C112 C115 - C119	86 82
C120	02 87
C121A - C121	83
C122	87
C123 C124 - C125	83 81
C124 - C125 C126 - C128	85
C130	88
C131	89
C133 - C135 C138 - C139	82 83
C140	88
C141	85
C142 C143A - C148	89 94
C143A - C146 C149	94 91
C150 - C151	92
C152	94
C153D - C153 C154	81 84
C154 C155 - C157	04 91
C158	94
C159 - C163	84
C164 C165 - C166	81 83
C167 - C168	82
C169 - C170	92
C171 - C172 C173	81
C173 C174 - C180	92 84
C183 - C187	92
C188 - C189 C190 - C191	85 86
C192	85
C193 C194	82
C194	81
C195 - C196 C197	oz
C197 C198	86
C199 C200D - C200	83
C200D - C200 C201 - C203	81 89
C204	91
C205 C206 - C207	82
C206 - C207	95
C208 - C209 C210 - C213	96 95
C214	83
C215 - C216	88
C217 C218	90 86
C218	85
C220 - C221	_96
C222	84
CASE/1 - CASE/5	146
CASE/1 - CASE/5 CASE/65 CASE/1001127 -	126
CASE/1001127 -	128
CASE/DH CASE/GRAB/1	_133 171
CASE/HJ & CASE/HJ/A	130
CASE/SNAP/3 CASE/SNAP/5	178
CASE/SNAP/5 CASE/T2	100
UNUL/12	_109

PRODUCT REFERENCE INDEX

CONVERSION CHART

Product Bef	Page
Product Ref. F CASE/T4 - CASE/T10 _ CASE/T20_	146
CASE/T20	110
CASE/UBR	146
CB All refs	168
CC/ All refs CCC/KIT CD/RACK/1	157
CCC/KIT	_194 147
CDJ/ All refs CE/ All refs CG/ All refs CGS/ All refs186 -	120
CE/ All refs	145
CGS/ All refs186 -	187
CIRC All refs126 - CJ/ All refs126 -	101
CJ/ All reis120 - CLT/ADP All refs	145
CLT/ADP All refs CLT/NUT/T2 CLT/NUT/T4	109
CLI/NUI/I4	108
CLT/NUT/T5 CLT/NUT/T10 CLT/SLV All refs	105
CLT/SLV All refs	150
CLT/T2 All refs CLT/T3/3 CLT/T3/635 & CLT/T3/8	109
CLT/T3/635 & CLT/T3/8 _	150
CLT/T4 All refs CLT/T5/32 CLT/T9 All refs	108
CLT/T9 All refs	150
CLT/T10 All refs CM/ All refs	104
CNC All refs	114
CNS All refs COLL/ All refs	106
COLL/ All refs COMBI66 & COMBI600 _	101
COMBIOO & COMBIOOO	120
COMBI1002 CR/BJB All refs	110
CR/H150 All refs CR/KB All refs	188
CR/KFP All refs CR/PDS All refs	96
CR/PDS All refs	_93
CRT All refs CS/ All refs CS/ All refs159 -	146
CSB/ All refs159 -	161
CTI/ All refs CTR/ All refs	141
D/CLAMP/A & D/STAND/A	133
DC400 All refs	119
DE All refs DG/JIG	150
DH/ All refs	97
DS/TAPE DVD/DWS	149
DVD/JB/PK/1 DVD/RACK/1	195
DVD/RACK/1 DVD/RS/ All refs	147
DVD/RS/ All reis DVD/TRADE	195
DVD/TRADE DWL/ All refs DWS/ All refs192 -	148
DWS/ All refs192 -	193
ELLIPSE All refs F40 - F42	
FC/ All refs	129
FHA/ All refs	145
FHA/ All refs FIX/ All refs FR/ All refs FR/ All refs FT/ All refs GB/01 - GB/SET/3 GB/01 - GB/SET/3 GB/T2/18 GB/T10/ All refs GB/10 - GB12 GB13/P/A GB13/P/A GB158 120 - GB122 - GB333	_145 150
FT/ All refs	157
FTS/ All refs	194
GB/01 - GB/SET/3	147
GB/T2/18	109
GB/T10/ All refs	105
GB10 - GB12	143
GB13/P/A	140
GB14 - GB157 GB158 120 -	143
GB160130 &	132
GB222 - GB333	143
GB774 - GB794	143
GB222 - GB333 GB500 - GB700 GB774 - GB794 GP/ All refs GRAB/SE1/SET	156
H/JIG/75	131
H/JIG/75 H/JIG/A H75 - H250	130
H75 - H250	188
HINGE/JIG HJ/1 HK/T/ All refs	130
HK/T/ All refs	145
HM All refs97 & HOSE/ All refs97	148
INLAY/KIT/A	140
INLAY/KIT/A INS All refs	149
IT/3300140 - IT/3402440 _	153

Product Ref.	Page
IT/7210041 - IT/7340147	154
IT/7410051 - IT/7420471	155
IT/7760061 - IT/7760201 For other IT/ refs see IT Catal	152
K44/ All refs	
K46/ All refs	150
KB All refs	149
KWJ All refs	128
L50 - L160 LB/JIG	/ 125
LOCK/JIG	132
LOCK/JIG/A	
M/3S01 M/KWS01	190
M/P2P01	190
M/DR01	101
M/RBT/ All refs M/TS01 & M/TS01	123
MAG/PACK/ All refs	147
MB/KIT	189
ME/JIG MITRE/ All refs	136
MS/PRO	191
MT/1	149
MT/5X19	191
MT/DUSTKIT MT/JIG & MT/JIG/EURO	121
N/COMPASS/ All refs	
NS/MAT/A	188
NVRS/ All refs	144
OFS/BASE	137
PB/ All refs PBT/PACK PC/ All refs129 &	163
PC/ All refs129 &	148
PDS/ All rets	56
PDW All refs	_150 135
PFJ/SET/1 PH/ All refs	165
PH/ All refs PJ/1 PJ/CL/L - PJ/FBK	135
PJ/CL/L - PJ/FBK	127
PLUG/110V/32A POS/ All refs	196
PP150	188
PRESSURE/1	144
PRESSURE/1 PRT & PRT/L PSC/1 - PSC/50	50
PSC/101 - PSC/107	51
PSC/MS All refs	52
PT/ All refs	157
PTN/ All refs PUSH All refs	144
QUADX1/2TC	62
R/COMPASS/A	135
RB/ All refs RBT All refs	_14
RC All refs	134
RC All refs RDT All refs RESIN All refs	171
RESIN All refs	189
ROD/8 All refs ROD/10 All refs	107
ROT All refs RP/ All refs RS/ All refs RT/03 - RT/08 RT/03 - RT/08 RT/03 - RT/08	_77
RP/ All refs	156
RS/ All rets RT/03 - RT/08	148
RT/3.0 - RT/3.5A	101
RT/10 - RT/24	_12
RI/30 - RI/39	_13 12
RT/60	13
RT/65	_14
RT/70 - RT81	_13
RT/323	12
RT/331 - RT/339	_13
RT/KEY - RT/M3.0	101
RT/3.0 - RT/3.5A RT/10 - RT/24	125
RUST/ All refs	189
S2/ All refs	8
S2/ All refs S3/ All refs S11/ All refs	8
S31/ All refe	26
S47/4	_21
S47/70 - S47/72	_19
S40/ All rets S49/01 - S49/1	_19 15
S49/2 - S49/8	_73
S47/4 \$47/70 - \$47/72 \$48/All refs \$49/01 - \$49/1 \$49/20 - \$49/8 \$49/20 - \$49/25	_15
549/20 - 549/25	_/3

Product Ref	Dago
Product Ref. S55/02LH - S55/06 S55/08	raye
S55/02LH - S55/06 S55/08	
	- 11
S55/10 - S55/11	77
S58/ All refs	-11
S55/10 - S55/11 S57/ All refs S58/ All refs S59/ All refs S59/ All refs S60/ All refs	_11
S60/ All refs	15
SET/DC1 SET/MT All refs	121
SET/BI	98
SET/SS8 - SET/SS9	99
SET/SS30 SHIM All refs	62
SKI/SET/1	_145
SKU/SET/1 SL/ All refs SNAP/AB All refs SNAP/AD2 All refs SNAP/AD2 All refs SNAP/ASA SNAP/ASA SNAP/CB All refs SNAP/CS All refs SNAP/CS All refs SNAP/CSK / All refs	64
SNAP/AD2 All refs	179
SNAP/ADP All refs	180
SNAP/AFP2/SET	_179
SNAP/BH All refs	181
SNAP/CB All refs	176
SNAP/CS All refs	_175 2.180
SNAP/CSK/ All refs_176 & SNAP/CSTC/SET SNAP/D/ All refs	175
SNAP/D/ All refs	175
SNAP/DB179	5-176
SNAP/DBG All Tels	181
SNAP/DRV/SET	174
SNAP/DS/ All refs	175
SNAP/FLIP/SET	181
SNAP/FS All refs	178
SNAP/GD All refs	_179
SNAP/HD/SET	_175
SNAP/HEX/ All refs	182
SNAP/HP	175
SNAP/DBG All refs SNAP/DPZ/ASA SNAP/DRV/SET SNAP/DS/ All refs SNAP/FB All refs SNAP/FB All refs SNAP/FD All refs SNAP/HD/SET SNAP/HD/SET SNAP/HEX/ All refs SNAP/HP All refs SNAP/HP All refs SNAP/MAG	182
SNAP/MAG	_181
SNAP/MB/ All refs	_177
SNAP/IP All refs SNAP/MAG SNAP/MB/ All refs SNAP/MD All refs SNAP/MD All refs SNAP/ND All refs SNAP/ND All refs SNAP/PC All refs SNAP/PH/ All refs SNAP/PH/ All refs	_177
SNAP/MSH All refs	_181
SNAP/ND All refs	_180 176
SNAP/OFLD	_181
SNAP/PC All refs	_176
SNAP/PH/ All rets SNAP/PHD/95	182
SNAP/PZ/ All refs	182
SNAP/QC All refs	_174
SNAP/PHD/95 SNAP/PZ/ All refs SNAP/QC All refs SNAP/SA All refs SNAP/SA All refs SNAP/SD All refs SNAP/SD All refs SNAP/SR All refs SNAP/SR All refs SNAP/SS/5MM SNAP/TAP All refs SNAP/TD All refs SNAP/TD All refs SNAP/TD All refs SNAP/TD All refs SNAP/TX All refs SNAP/TX All refs SNAP/TX All refs SNAP/TWB All refs SNAP/WB All refs SNAP/WB All refs SNAP/WB All refs	178
SNAP/SB All refs	182
SNAP/SD All refs	_180
SNAP/SQ All refs	182
SNAP/SS/5MM	_177
SNAP/TAP All refs	_180
SNAP/TB1/SET	184
SNAP/TH All refs	183
SNAP/TOTE/1	_184
SNAP/TX All refs	182
SNAP/WS1/SET	_179
SOCK/110V/32A	_104
SP-20/50 All refs SP-27/35 All refs	49 62
SP-27/35 All refs SP-3060A - SP/3061C _ SP-338A - SP-339A	170
SP-338A - SP-339A SP-34/70TC SP-34/73T0	61
SP-34/701C SP-34/731C SP-34/74TC	63
SP-34/74TC SP-349 All refs	_170
SP-46/01D - SP-46/02D	_101
SP-755 All refs SP-765A - SP-766B	20
SP-767 All refs	25
SP-767 All refs SP-768 All refs SP-866A - SP-876B SP-A - SP-C	30
SP-866A - SP-876B	22 101
SP-C149A - SP-C157A SP-C208C - SP-C221C	91
SP-C208C - SP-C221C	96
SP-K - SP-P	167
SP-D - SP-J SP-K - SP-P SP-PSC All refs SP-Q	51
SP-Q	_101

Product Ref.	Page
SP-QUAD All refs	62
SP-R	_101
SP-RDT/ All refs	_171
SP-S - SP-W SPAC/8/34 - SPAC/8/53	_101
SPAC/8/34 - SPAC/8/53 SPACER All refs	22 62
SPAN All refs	145
SS/ All refs	124
SSP All refs STAIR/A & STAIR/B	_33
STAIR/A & STAIR/B	_124
T2K	_109
T3/GBS/USA	_143
T4EK & T4ELK	108
T10EK & T10ELK	105
T10EK & T10ELK T11 All refs T20K	104
T20K	110
T30 All refs	111
T46/ All refs	17
T50 All refs	_185
T420 All refs	169
T421 All refs TEMP/BH/A	_169
TEMP/COR/A	141
TEMP/CTI/A	141
I EMP/IN All refs	140
TEMP/LB/A TEMP/LN57X1/4	125
TEMP/LN57X1/4	_140
	132
TEMP/LUC/57 TEMP/NUC/57	_140
TEMP/NUC/57	_140
TEMP/OTB/ All refs	1/0
TEMP/PD All refs TEMP/PFP/A	140
TEMP/SS All refs	124
TEMP/TRKX1/4	141
TEMP/TRKX1/4 TM/ All refs	149
TR/160 - TR/300	_156
TR/160 - TR/300 TR/B16A - TR/BB16 TR/KFP/1 - TR/PACK/3_	79
TR/KFP/1 - TR/PACK/3_	78
TR01 - TR20 TR21 - TR36	
TR21 - TR36 TR37 All refs	79 78
TR38 - TR39	79
TR40D	78
TR41 - TR42	79
TRENDICOTE	189
TRENDIWAX	
TSQ	_191
TV All refs	
UNI/CS UNI/GB16 - UNI/PIN/2	_167 142
UNIBASE	
	192
VARIJIG VBS/ All refs	1/0
VIDEO All refs	195
VIDEO All refs VJS All refs138 8	\$ 139
WP-AP/06	110
WP-BH/ All refs	131
WP-AP/06 WP-BH/ All refs WP-FC All refs	_188
WP-GRAB All refs WP-HJ All refs WP-LOCK All refs_132 &	_171
WP-HJ All refs	_130
WP-LOCK All refs_132 &	\$ 133
WP-RTI/ All refs WP-SCW/09105 8	2 100
WP-SCW/13	106
WP-SCW/42	105
WP-SCW/42 WP-SJA All refs WP-SNAP/D All refs176	124
WP-SNAP/D All refs _176	- 181
WP-SNAP/DT All refs	175
WP-SNAP/FL All refs _ WP-SNAP/GSW/1	_181
WP-SNAP/GSW/1	_176
WP-SNAP/SPR/ All refs WP-SPAN/8	110
WP-T2/ All refs	109
WP-T4 All refs	108
WP-T4 All refs106	- 107
WP-T5E All refs	106
WP-T9/075 WP-T10 All refs WP-T11 All refs104	_105
WP-T10 All refs	_105
WP-T11 All refs104	- 105
WP-T20/ All refs WP-T30/ All refs	_110
WP-130/ All refs WP-T50/ All refs	185

Inches		mm
1/64		0.5
3/64		1.5
5/64 3/32 ——		2
7/64		2.5
9/64 5/32 ——		<u> </u>
3/16		4.5
7/32 <u>13/64</u> 7/32 <u>15/64</u>		5.5
1/4 17/64		6.5
9/32		7.5
5/16		8.5
11/32 <u>23/64</u>		9
3/8 25/64 13/32		9.5
27/64		10.5 11
29/64 15/32 ——		11.5 12
31/64		12.5 13
33/64 17/32 ——		13.5
9/16		14 14.5
19/32		15
5/8		15.5 16
21/32		^{16.5}
11/16 		17.5 18
23/32		18.5
3/4 49/64		19.5
25/32 51/64 13/16		20 20.5
53/64 27/32		21
7/8		21.5 22
57/64 29/32		22.5 23
15/16 59/64		23.5 24
31/32 61/64 63/64		24.5 25
1		25.5
1/32		26 26.5
1/16		27 27.5
3/32 7/64		28 28.5
11/8 9/64 5/32		29
3/32 11/64 3/16		29.5 30
13/64 7/32 ——		30.5 31
15/64 1 1/4		31.5 32
9/32		32.5
5/16 <u>19/64</u> 21/64		33 33.5
11/32		34 34.5
13/8		35 35.5
13/32 — 27/64		36
7/16		36.5 37
15/32		37.5 38
33/64 17/32		38.5 39
35/64		39.5
	-	

ROUTER CUTTERS

Acrylic Cutters15 Aluminium Cutters76 - 77 Aquamac Cutters66, 95 Arbors for Slotters & Groovers64 - 65
Ball End Cutters 63 Bead & Reed Cutters 34 - 38 Bearings for Cutters 10, 16, 79, 100 Bevel Cutters 25, 83 Bevel Trimmers 19 - 20 Biscuit Jointing 61, 79, 94 Brookman Cutters 27 Burrs 15, 73
CRAFTPRO Kitchen Fitters Packs - see page 96
Capillary Groove Cutters43
Carripile Cutters 67
Cavetto Cutters45, 87
Cavetto Cutters45, 87 Chamfer & 'V' Groove24 - 25, 75, 83
Classic Ogee Cutters46, 89
Comb Jointing Cutter22
Corian Cutters69 - 71
Corner Beads35, 88
Cornice Cutters40
Countersinks & Counterbores72
Cove Cutters44 - 45, 59, 87
Craft Pro Cutters80 - 96

	_
Dished Moulds 56 Dolls House Cutters 97 Dovetail Cutters 26 - 27, 75, 8 Dowel Drills 72, 8 Drawer Pull Cutters 44 Drawer Lock Jointer 22	7 4 4 3
EasySet Cutters 5' Economy Cutters 19 Edge Mould Cutters 39 - 42 Engraving Cutters 24, 70	9 2
Fibreglass (GRP) Cutters 15 Finger Jointers 22 Finger Pull Cutters 43	5 2 3
Glazing Bar Cutters31 - 33 Groovers64 - 65	3
Handrail Cutters 30, 42 Hinge Recessers 54 HSS Cutters 74 - 74	2 9 7
Inlay Cutters9, 16, 7 Intumescent Strip Cutters68, 79, 96	1 6
Keyhole Slotting Cutters63, 87 Kitchen Fitters Packs78, 96 Knuckle Joint23	6
Lamb's Tongue Set49 Leigh Jig Cutters27	9 7
Matchlining Cutter 6 Mitre Corner Jointers 22 Mortise Cutters 20 Multi-mould Cutters 4	3 9

PRO HSS TH ROUTER CUTTERS CU	RAD	DE GE R
Octacut Cutters33 Ogee Cutters46 - 49, 75, 89, 90 Ovolo Cutters28 - 34, 59, 75, 79, 85, 86		S S S S
Panel Door Cutters 50 - 56, 91 - 93 Panel Mould Cutters 57 - 59 Panel Raisers 53 - 56, 92 Pierce & Trim Cutters 21, 82 Pocket Cutters 8 Profile Scribers 50 - 52, 91 Profiling Cutters 17 - 18, 83		
Quad Groover Set62		S
R adius Cutters44 - 45, 75, 79, 87 Raised Panel Cutters53 - 56, 93		S S
Rasps 15. 73		Т
Rasps 15, 73 Rebate Cutters 10, 75, 82 Reeding Cutters 34 - 35 Replaceable Tip Cutters 12 - 14 Rounding Over 28 - 31, 79, 85		Te TI To
Routaseal Cutters 67 Router Drilling 72 - 73 Rule Joint Cutters 33		To To Tr Tr
		Τ̈́
Rotatip™ Cutters - see pages 12-14		V

J ash Bar Cutters33, 85
Sash Bar Cutters 33, 85 Sets 81, 97 - 99, 119, 121 Shear Cutters 9
Shear Cutters9
Shim Sets 62 Shoulder Scribe & Profile Sets 32
Shoulder Scribe & Profile Sets32
Slotters & Groovers64 - 65 Smokeseal Recesser68 Spare Parts for Cutters100 - 101
Smokeseal Recesser68
Spare Parts for Cutters100 - 101
Spiral Cutters11
Spiral Cutters11 Staff Bead Cutters34, 75, 88
Staff Bead Jointer 88
Staggered Tooth Cutters9
Stair Housing Cutters 26, 124
Straight Cutters 6 - 8, 81 Strip Recessing Cutters 16 Sunk Bead 35, 37 - 38
Strin Becessing Cutters 16
Sunk Bead 35 37 - 38
Tapered Cutters 16
Tapered Cutters16 Template Profilers18, 83
Thumb Mould 30
Thumb Mould30 Tongue & Groove Cutters63, 94
Tonk Strip Cutters16
Torus Cuttors
Torus Cutters 39 Trimming Cutters 17 - 21, 79, 82
Trada Danza 70, 70, 70
Trade Range 78 - 79 'T' Slot Cutters 63
1 SIOL CULLERS63
Undercut Cutters63
Verical Panel Raisers60
Vertical Panel Baisers 56, 92
Water Channel & Drip Groove43
Weatherseal Cutters66 - 67
Window Industry Cutters 76 - 77

CRAFT

CUT

CUTTER

SETS & SPARES

POWER TOOLS, JIGS, WOODWORKING TOOLS & ACCESSORIES

3D bitsAdjustable Machine Bits Airace Airshield Pro Anglefix Angle Gauge Auger Bits	113 112
Biscuits & Biscuit Blade Biscuit Jointer Boring Tools Bushing Washers Butt Hinge Template Cases for Cutters & Routers	110 195 166 - 170 157, 161 131 146
Clamping Systems CNC Smart Machines Collets for Routers Combi Jigs Compasses Corner Chisel Countersinks & Counterbores_ Craft Range Sawblades Cutter & Collet Care Kit Cutter Storage	_186 - 188 114 150 _126 - 128 135 _130 - 131 _167 - 168 159 - 161 194

Available from:

Depth Gauge Diamond Sharpening Tools Door Clamp & Door Stand Double Sided Tape Dovetail Jigs Dowels Draining Groove Jig Drilling Tools Dust Extraction DVDs	133 149 118 - 120 148 129 166 - 168
DG/JIG Draining Groove Jig - see page 129 Ellipse Jigs	136
Enlarging Tools	167
'F' Clamps Fast Track Sharpener Fine Height Adjusters Flat Bits Forstners	194 145 178
Guide Bush Equipment	143
Hand Mitre Shears Hinge Jig Hinge Sinkers73 Hoses & Fittings	_130 - 131 , 169, 177 111
Inserts, threaded	

Jig Making Accessories149	
Kitchen Worktop Jigs126 - 129 Knobs & Handles149	l
Letterbox Jigs125 Laminate Trimmer110 Lock Jigs132 - 133 Lubricants189	
M3 Square 190 Machine Bits 73, 169, 177 Mini Routabout 123 Mitre Fences 144 Mortise & Tenon Jig 121 Multiscribe 191	
Non-slip Mat188 No-Volt Release Switch144	
Offline Driver181 Offset Base137	
Panel Connector 148 Perfect Butt 191 Pivot Frame Jig 135 Pocket Hole Jig 165 Point 2 Point 190 Pro Grabit 171 Pro Router Table 116 Planer Blades 163 Plug Makers 72, 168, 176 Pushblock & Pushstick 144	
PUSHBLOCK Workholder - see page 144	

150

141

189

171

148

137

134 104 - 109

144

189

122 - 123

116 - 117

___115 - 150

Reduction Sleeves

Resin Cleaner

Routabout Jig _

Routaseal

Routers

Router Bases

Router Tables

Rust Buster

Router Carver

Router Table Accessories_

Routing Jigs & Accessories

Releasable Cable Ties

Rosette Drilling Tool



Retailer & Wholesaler	Sales01923 249911
End User Enquiries	0800 487363
General Fax	01923 236879
Technical Support	01923 224681
Technical Support Fax	01923 228657
Customer Services	01923 212497
Accounts	01923 221910
Email	_enquiry@trendm.co.uk
Web	www.trend-uk.com

Trend Machinery & Cutting Tools Ltd. Odhams Trading Estate St. Albans Road Watford WD24 7TR England.

