



# CORDLESS 108 LED RECHARGEABLE PORTABLE FLOODLIGHT LITHIUM-ION

MODEL NO: **LED108C.V3**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to  
instructions

## 1. SAFETY

### 1.1. ELECTRICAL SAFETY

USE ONLY THE SUPPLIED MAINS CHARGER PLUG FOR CONNECTING FLOODLIGHT TO THE MAINS POWER SUPPLY. ONLY USE THE SUPPLIED ADAPTOR FOR CONNECTING TO A VEHICLE 12V ACCESSORY SOCKET.

- WARNING!** It is the user's responsibility to read, understand and comply with the following electrical instructions:  
You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB. You must also read and understand the following instructions concerning electrical safety.

#### 1.1.1. The Electricity At Work Act 1989 requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT).

The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. If in any doubt about electrical safety, contact a qualified electrician.

Inspect the charger plug, cable and connector for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged **DO NOT** use.

- ✓ Check cables are always protected against short circuit and overload.
- ✓ Important: Uncoil the cable between charger and the floodlight.
- ✗ **DO NOT** pull the charger plug from the mains socket by the lead.
- ✗ **DO NOT** use any other type of charger with this product.
- ✗ **DO NOT** place the connector into any area of the floodlight except the correct jack inlet socket.
- ✗ **DO NOT** try to take the charger plug apart.
- ✗ **DO NOT** use the charger plug to charge or power any other electrical item.
- ✗ **DO NOT** get the charger wet, or use in wet, damp conditions (for indoor use only).
- WARNING! NEVER** substitute a standard 13Amp 3 pin plug, or any other type of plug, for the charger plug.

### 1.2. BATTERY SAFETY

- WARNING!** To reduce the risk of burns or fire:
  - ✗ **DO NOT** attempt to open, disassemble, modify or service the battery.
  - ✓ Ensure the charger is switched off and disconnected from the floodlight before attempting to open the lamp unit.
  - ✗ **DO NOT** expose to temperatures above 60°C (140°F).
  - ✗ **DO NOT** crush, puncture, short external contacts or dispose of in fire or water.
  - ✓ Replace only with the battery designated for this product.
  - ✓ Dispose of the old batteries in accordance with local authority battery regulations. **DO NOT** dispose of with regular refuse.
  - ✓ If the electrolyte in the cells contacts the skin, wash thoroughly with soap and water.
  - ✓ If the electrolyte in the cells gets into the eyes, rinse thoroughly with cool water and seek immediate medical attention.

### 1.3. GENERAL SAFETY

- ✓ Ensure the floodlight is correctly charged before initial use.
- ✗ **DO NOT** cover or block the lens during use.
- ✗ **DO NOT** turn the floodlight on when it is being re-charged.
- ✗ **DO NOT** shine directly into your, other person's or animal's eyes.
- ✗ **DO NOT** allow children to use the floodlight.
- ✗ **DO NOT** handle or move the floodlight whilst it is being charged.
- ✗ **DO NOT** use the floodlight if you suspect that the battery or the spotlight casing is damaged.
- ✗ **DO NOT** immerse the floodlight in water.
- ✓ Ensure replacement batteries are genuine Sealey batteries of the same rating.
- ✓ Ensure the floodlight is unplugged and allowed to cool before attempting any cleaning, replacement or storage.
- ✓ When not in use store the floodlight in a safe, dry, childproof location.

## 2. INTRODUCTION

Portable floodlight with adjustable head, housed within a stable steel frame. Features 108 super bright LED bulbs which have a longer working life than traditional halogen tubes. Weatherproof design with on/off rocker switch. Supplied with mains cable and 12V in-car charger. Built-in 7.4V 2.2Ah Li-ion rechargeable battery. Suitable for lighting workshops, garages and other environments where no mains supply is available.

### 3. SPECIFICATION

Model No.....	LED108C.V3
Battery .....	Li-ion 7.4V 2.2Ah
Lumen Output .....	585lm
LEDs .....	108
Operating Time .....	3.5hr
Charging time.....	4hr

### 4. OPERATION

❑ **WARNING!** Ensure that you read, and fully understand the safety instructions before use.

#### 4.1. BATTERY CHARGING

4.1.1. Ensure the floodlight is turned 'Off' whilst charging. Failure to do so will damage the charger plug/vehicle plug  
4.1.2. Turn floodlight 'On' and 'Off' by the rocker switch (fig.1.A) on the main body. Select position 'O' to turn the floodlight 'Off'.

4.1.3. The position of the main body can be altered by loosening the thumb screws (fig.1.B) and moving the main body.

#### 4.2. MAINS CHARGER PLUG

4.2.1. Ensure the floodlight is turned 'Off' and then plug the charger adaptor into the jack inlet (fig.1.C) on the floodlight body. Stand the floodlight in a safe location ready to charge.

4.2.2. Plug charger into the mains supply. The charging indicator LED (fig.2) will illuminate RED as the battery charges.

4.2.3. Allow approximately 4 hours for the initial charge and for subsequent charges. Once the battery has reached full charge, the charging indicator LED (fig.2) will illuminate GREEN.

4.2.4. When full charge has been reached, switch off the mains supply and unplug the charger from the mains and then from the floodlight. The floodlight is now ready for use.

4.2.5. Store the charger in a safe, dry location.

Notes: a) Fully charged batteries will last for approximately 3.5 hours.

b) **DO NOT** fully discharge the batteries before recharging.

c) **DO NOT** leave batteries in a discharged state, recharge batteries immediately. If the floodlight is not in use, recharge the batteries every three months.

#### 4.3. VEHICLE CHARGER PLUG

4.3.1. Ensure the floodlight is turned 'Off' and then plug the vehicle charger plug into the jack inlet (fig.1.C) on the floodlight body. Stand the floodlight in a safe location ready to charge.

4.3.2. Insert the charger plug into the vehicle's accessory socket (12V only). The charging indicator LED (fig.2) will illuminate RED as the battery charges.



4.3.3. Allow approximately 4 hours for the initial charge and for subsequent charges. Once the battery has reached full charge, the charging indicator LED (fig.2) will illuminate GREEN.

4.3.4. When full charge has been reached, unplug the adaptor from the vehicle's accessory socket and then from the floodlight. The floodlight is now ready for use.

4.3.5. Store the charger plug adaptor in a safe, dry location.

**NOTE:** Charging the floodlight from a 12V vehicle socket will drain the vehicle's battery, unless the engine is running.

**NOTE:** The Li-ion battery does not suffer from memory effect and once fully charged the floodlight may be stored for up to 6 months before recharging is required.

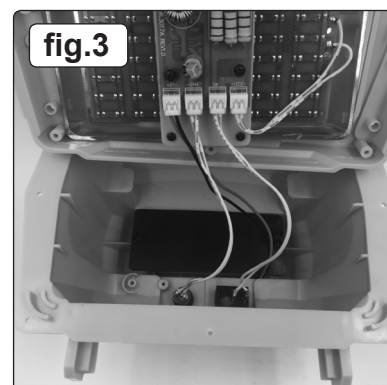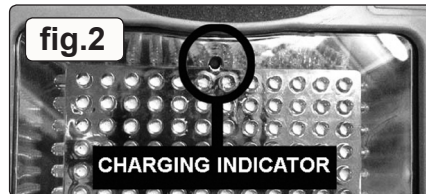

#### IMPORTANT WARRANTY INFORMATION:

The battery fitted to this floodlight is considered to be a consumable item and its ability to accept charge will reduce over time. We will warranty it against mechanical and electrical defect for a period of one year - this does not cover fair wear and tear. If the battery is not properly charged before first use, or properly conditioned its capacity will diminish. Under these circumstances we will not replace the battery even if it is less than one year old.

## 5. MAINTENANCE

### 5.1. CHANGING THE BATTERY

- **WARNING!** Ensure that you read, understand and apply the safety instructions relating to the battery before changing it.
- 5.1.1. Ensure the floodlight is turned 'Off' before attempting to change the battery.
- 5.1.2. Undo the 8 retaining screws (fig.1.D) at the rear of the floodlight.
- 5.1.3. Remove the cover, carefully remove the glass and remove the LED panel from the floodlight body.
- 5.1.4. Undo the 2 battery retainer screws (fig.3) and remove the battery retainer.
- 5.1.5. Unplug the battery cables from the circuit board.
- 5.1.6. Remove the old battery and replace with a genuine Sealey battery and install by reversing the above procedure.  
**NOTE:** Take care not to pinch any wires.
- 5.1.7. Dispose of old batteries in accordance with local authority battery regulations. **DO NOT** dispose of with regular refuse.

Parts support is available for this product. To obtain parts, email [sales@sealey.co.uk](mailto:sales@sealey.co.uk) or telephone 01284 757500



#### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



#### WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



#### BATTERY REMOVAL REFER TO 5.1

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



[sales@sealey.co.uk](mailto:sales@sealey.co.uk)



[www.sealey.co.uk](http://www.sealey.co.uk)