


CLAMPING SYSTEMS

NEW BAR CLAMP & SPREADER

Designed for one handed use, converting easily from clamp to spreader. Four sizes available.

- Heavy-duty internal mechanism.
- Precision engineered special shaped 3/4" x 15/64" carbon steel bar for consistent and rigid performance.
- 3-1/8" throat.
- Soft jaw pads made from thermal plastic rubber.
- Fixed jaw reversible for spreading operations.
- Ergonomically designed plastic handles with non-slip (TPR - thermal plastic rubber) inserts, and insert release trigger for maximum comfort.

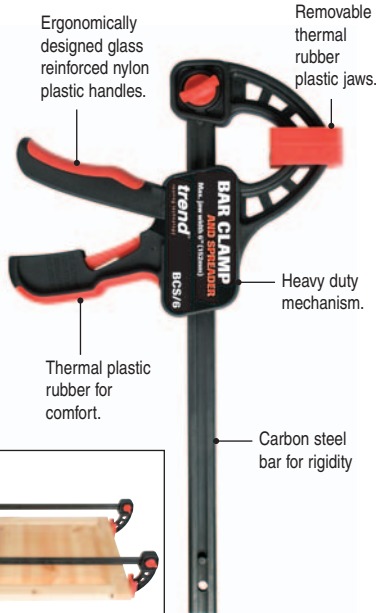

CLAMP TO SPREADER:

1. Undo fixing bolt & release clamp end



2. Pull clamp end off & turn around.



3. Slide clamp end on bar & screw on fixing bolt




247 lbs CLAMPING PRESSURE

Replacement Parts:

Fixing Bolt
U*WP-BCS/FB
For unscrewing clamp to convert to spreader.

Soft Jaw Pad
U*WP-BCS/SJP
Removable thermal rubber plastic jaw.

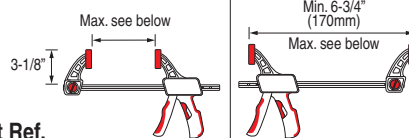

Product Ref.	6" (152mm)	14" (355mm)
U*BSC/6	6" (152mm)	14" (355mm)
U*BSC/12	12" (305mm)	20" (508mm)
U*BSC/24	24" (610mm)	32" (812mm)
U*BSC/36	36" (915mm)	44" (1118mm)

8" HEAVY DUTY GRIPPER CLAMP

Quick action 8" (200mm) maximum opening gripper clamp with 4" (100mm) throat for a variety of clamping applications.

Removable pad to provide grip on work surfaces and reduce workpiece marking.


Ball joint swivel clamping jaw with removable pad.

Soft grip handle for better grip and more clamping force.

Groove in bar to allow sliding head to move more smoothly if covered in dust.

Zinc plated steel bar to prevent rust.

Serrated bar for better grip of sliding head when under clamp pressure.

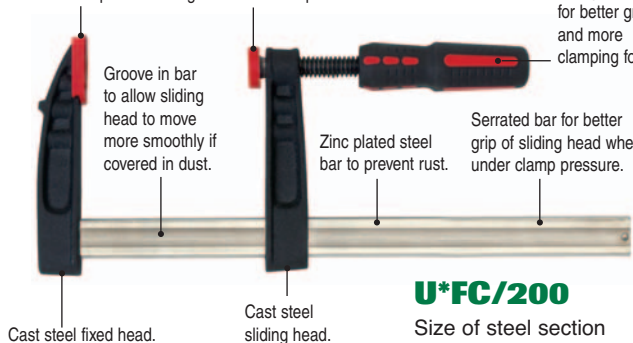

U*FC/200

Size of steel section 1-1/16" x 19/64"

NEW

CRAFTSMAN & HOBBYIST TOGGLE CLAMP

Economy range clamp, ideal for securing workpiece either onto jigs or to the surface of the machine. 330 lbs (150kg force).



U*CR/H150 (1 off)

U*CR/H150/SET (pair)

Size 6-5/16" x 2"