


TRIMMING

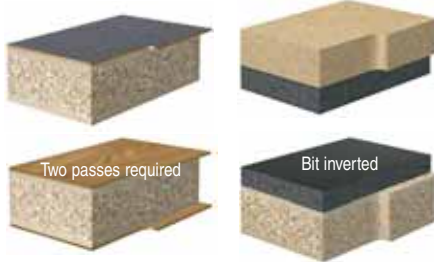

Guided Flush Trim Two Flute

For trimming and bevelling timber, lippings and plastic laminate edges.

D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter	
					1/4"	1/2"
3/8	1/2	3/8	2-1/8	U*T091	✓	-
3/8	1	3/8	2-5/8	U*T092	✓	-
1/2	1/2	1/2	2-1/8	U*T093	✓	-
1/2	1	1/2	2-5/8	U*T094	✓	✓
1/2	1-1/2	1/2	3-7/8	U*T096	-	✓
1/2	2	1/2	4-1/4	U*T097	-	✓

Guided Flush Trim Three Flute

For extra fine trimming and longer life.


D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter	
					1/4"	1/2"
1/2	1/2	1/2	2-1/4	U*T098	✓	-
1/2	1	1/2	2-5/8	U*T099	✓	✓

Shank Mounted Flush Trim Plunge

For trimming and bevelling timber, lippings and plastic laminate edges.




Ref. U*T102




D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter	
					1/4"	1/2"
1/2	1/4	1/2	1-3/4	U*T100	✓	-
1/2	1	1/2	2-1/2	U*T102	✓	-
1/2	1-1/4	1/2	2-3/4	U*T103	✓	-
5/8	1	5/8	2-1/2	U*T105	✓	-
3/4	1	3/4	2-1/2	U*T106	✓	✓
3/4	1-3/4	3/4	3-3/4	U*T107	-	✓

Guided Bevel Trim


Gives a smooth bevel finish for laminates and other materials. Bearing follows the board beneath.



Ref. U*T111



Ref. U*T113




Ref. U*T111

A deg.	D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter	
						1/4"	1/2"
75°	5/8	1/4	1/2	2-1/8	U*T111	✓	-
65°	23/32	1/4	1/2	2-1/8	U*T113	✓	-

MORTISER

Mortiser Two Flute

For mortising and grooving giving good chip clearance. Also ideal for hinge recessing.




D inch	C inch	OL inch	Product Ref.	Shank Diameter
1/2	3/4	2	U*T060	1/4" ✓

'V' GROOVE & CHAMFER

'V' Groove

Ideal for fast chamfering to remove an edge on timber or to create a decorative edge.





A deg.	D inch	C inch	OL inch	Product Ref.	Shank Diameter
45°	3/8	5/16	1-5/8	U*T140	1/4" ✓
45°	1/2	1/2	1-3/4	U*T142	✓
60°	1/2	5/8	1-5/8	U*T144	✓

Guided Chamfer

Ideal for fast chamfering to remove edge on timber or create a decorative edge.



Ref. U*T151

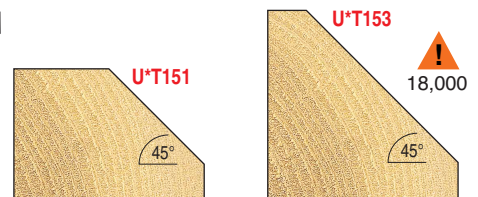

A deg.	D inch	C inch	OL inch	Product Ref.	Shank Diameter	
					1/4"	1/2"
45°	1-1/4	5/8	2	U*T151	✓	-
45°	1-29/32	3/4	2-3/4	U*T153	-	✓