

PRO ROUTER TABLE

Professional portable router table with aluminium table surface and back fence for floor & bench mounting use.

- Back fence squareness adjustment for absolute accuracy.
- Bench leg level adjustment when mounted on a bench.

4 Insert Rings

In sizes 3/4", 1-3/8", 2-1/8" & 2-11/16"Ø, to suit various bit diameters.



Compatibility

www.trend-usa.com/compatibility



Guard Assembly

Quick lateral & height adjustment of finger pressure and guard.



Back Fence

Quick release 4-3/8" cast aluminium back fence with adjustable aluminium cheeks and squareness adjustment.



2-1/4" Dust Spout Aperture

For use with 2-1/4" hose and has Lead-on Pin park.



3-17/32" Aperture

For larger panel raiser bits.


Side scales to set back fence.

Pushstick park on rear.

No-volt release switch.

Leg clamps to remove lower legs & adjust for uneven floors.

Router not included.

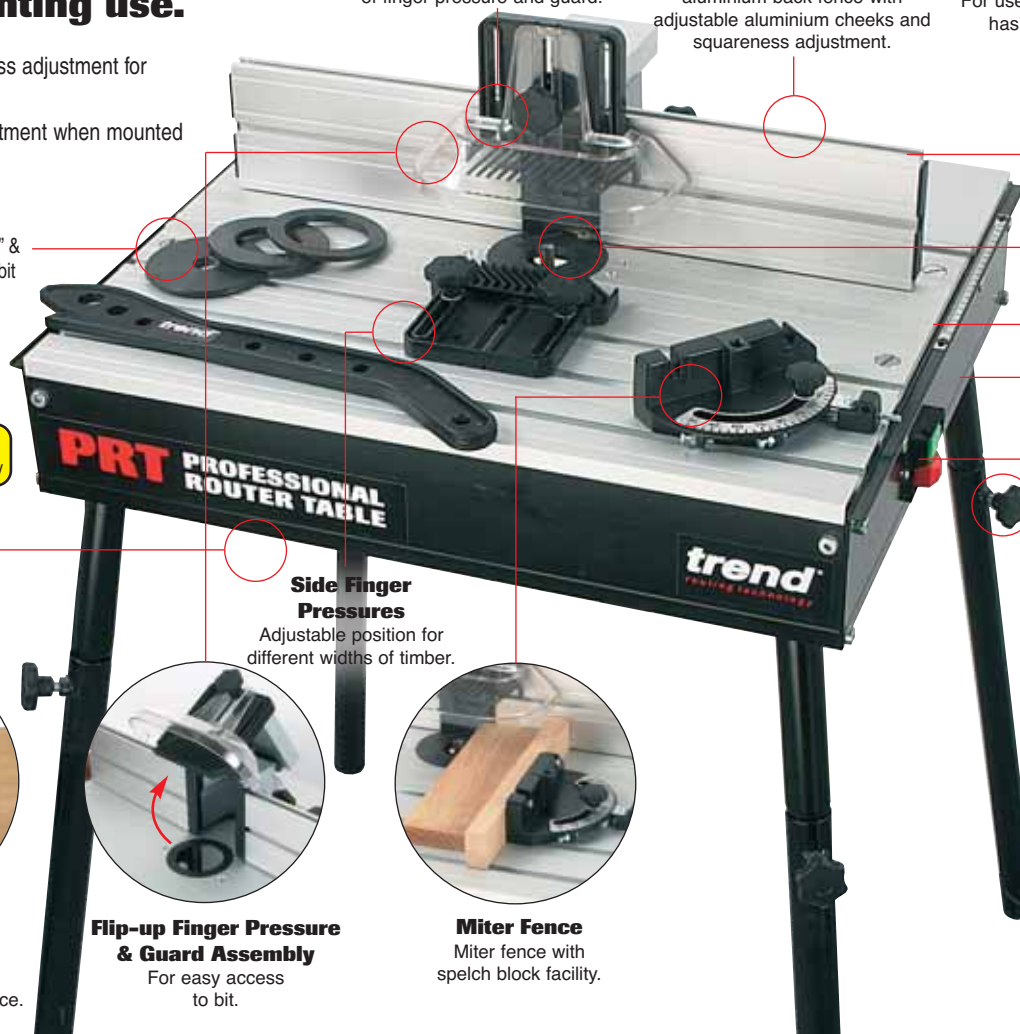

Soft rubber feet to prevent movement.



Bench Leg Level Adjustment

Enabling the table to be levelled on an uneven surface.

Side Finger Pressures

Adjustable position for different widths of timber.



Flip-up Finger Pressure & Guard Assembly

For easy access to bit.



Miter Fence

Miter fence with splch block facility.

Includes:

- 4 x Insert Rings
- 1 x No-volt Release Switch
- 1 x Miter Fence
- 2 x Finger Pressures
- 1 x Large Adjustable Safety Guard
- 1 x Lead-on Pin
- 1 x Pushstick

Optional Accessory:

Copy Follower

Attachment for copy following of curved templates. Dust spout aperture 1-3/8"Ø.

U*PRT/01 ▲



▲ while stocks last

Product Reference:

U*PRT

- Floor or bench standing with removable legs with adjustment for uneven floors.
- Extruded 5/16" thick aluminium alloy table top with minimal loss of bit depth.
- Bit aperture of 3-17/32" allows the use of the largest router bits available.
- Cast back fence with extruded adjustable alloy cheeks and "T" slots.
- Made to EN standards, with back fence accuracy of 0.5° & table flatness of 0.02".
- With a suitable size and weight enabling easy re-positioning around the workshop & transportation for on-site use.

Specification:

Rating	Professional/Trade
Table size	25-1/2" x 21-1/2"
Bench height	13-3/4"
Height with legs	32-5/8"
Router bit aperture	3-1/2"Ø
Insert ring sizes	3/4", 1-3/8", 2-1/8" & 2-11/16"Ø
Back fence height	4-3/8"
Dust spout aperture	2-1/4"Ø
Voltage	120v

To fit the following routers directly:

TREND T5, T5 MK2, BOSCH GOF1600A, 1700ACE CMT CMT1E, 2E DEWALT DW613, 614, 615, 620, 621, 624, 625E, 629 DRAPER PT1200V ELU MOF96(E) MK2, 131, 177(E), OF97(E) MAKITA RP0910, 1110C PERLES OF808(E) >1999

⚠ Routers over 2-1/2 HP cannot be used with no-volt release switch router tables.

Removable centre plate of table will need to be re-drilled for other makes and models of medium & heavy duty routers.