

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

MODEL NO : **LED26**

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY

1.1. GENERAL

- x **DO NOT** shine directly into your, other person's or animal's eyes.
- x **DO NOT** allow children to use the inspection lamp.
- x **DO NOT** handle or move the inspection lamp whilst it is being charged.
- x **DO NOT** use the inspection lamp if you suspect that the battery or the inspection lamp casing is damaged.
- x **DO NOT** leave battery in a discharged state: recharge battery immediately. If the inspection lamp is not in use, recharge the battery every 3 to 4 weeks.

1.3. ELECTRICAL SAFETY FOR USE OF CHARGER.

USE ONLY THE SUPPLIED CHARGER PLUG FOR CONNECTING INSPECTION LAMP TO THE POWER SUPPLY.

WARNING! It is the user's responsibility to read, understand and comply with the following electrical instructions:

You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated in the main distribution board. We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB.

You must also read and understand the instructions concerning electrical safety, paragraph 1.3.1 onwards.

1.3.1. The Electricity At Work Act 1989 requires all portable electrical appliances, if used on business premises, be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.

1.3.2. The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. **If in any doubt about electrical safety, contact a qualified electrician.**

1.3.3. You must ensure that you:

- ✓ Inspect the charger plug, cable and connector for wear and damage to ensure items are safe before connecting to the mains power supply. If worn or damaged **DO NOT** use.
- ✓ Important: Check that the voltage marked on the charger plug is the same as the power supply to be used.
- ✓ Uncoil the cable between charger and the inspection lamp.
- x **DO NOT** pull the charger plug from the mains socket by the lead.
- x **DO NOT** use any other type of charger with this inspection lamp.
- x **DO NOT** try to take the charger plug apart.
- x **DO NOT** use the charger plug to charge or power any other electrical item.
- x **DO NOT** get the charger wet, or use in wet, damp conditions (for indoor use only).
- ☐ **WARNING! NEVER** substitute a standard 13amp 3 pin plug, or any

2. INTRODUCTION

Robust impact resistant housing incorporating 26 super bright LEDs, with comfort grip and end cap. Rotating hanging hook and flexible loop for easy positioning. Ideal for use in engine bays, under body inspections and low light work areas.


- High output operation for 4 hours when fully charged.
- Mains charger and LED charge indicator.
- Battery 3.6V / 1800mAh.
- Charging Voltage (output) 6V 500mA
- General charging time 5-7 hours.

3. CHARGING

- 3.1 Make sure the inspection lamp is switched off before commencing charging.
- 3.2 Remove the small rubber plug from the charging socket at the base of the inspection lamp. Uncoil the charging lead and plug the connector into the charging socket.
- 3.3 Plug the power lead from the charger into the mains supply.
- 3.4 The RED charging indicator light under the main lens will light to indicate that charging has commenced.
- 3.5 When charging for the first time leave on charge for at least 14hrs. Subsequent charges should be for 5 to 7 hours.
- 3.6 Unplug the charger from the mains supply. Unplug the charging lead from the inspection lamp. The small rubber plug should be inserted back into the charger socket.
- 3.7 The inspection lamp will operate continuously for 4 hours on one charge.
- 3.8 Charger Part No: **LED28.C**
NOTE: Do not leave the lamp in an uncharged state for a long period of time. The battery will perform better if fully drained and then fully recharged at least one a month.

4. OPERATION

- 4.1 **DIRECT THE LENS AWAY FROM YOUR EYES BEFORE SWITCHING ON.** Switch the inspection lamp ON & OFF using the black push button switch on the handle.
- 4.2 To suspend the inspection lamp, use the hanging hook at the top of the case. When the inspection lamp is hanging from its hook, it can be rotated through 360° for more precise positioning. Alternatively it can be suspended from the flexible loop adjacent to the charging socket.

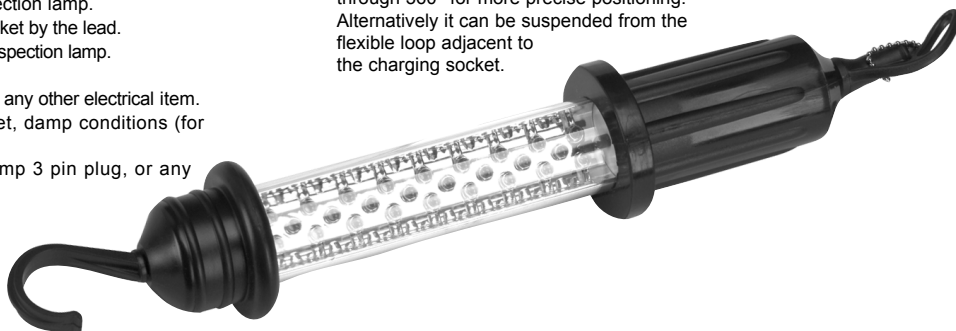

Declaration of Conformity We, the sole importer into the UK, declare that the products listed here are in conformity with the following standards and directives. The construction files for these products are held by the Manufacturer and may be inspected, by a national authority, upon request to Jack Sealey Ltd.

**Charger for Cordless Inspection Lamp LED26
CHARGER LED28.C**
73/23/EEC LV Directive
89/336/EEC EMC Directive
93/68/EEC Marking Directive

Signed by Mark Sweetman
6th July 2006
For Jack Sealey Ltd. Sole importer into the UK of
Sealey Power Products.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our catalogue and latest promotions call us on 01284 757525 and leave your full name, address and postcode.