



PROFESSIONAL ROUTER BITS

Tungsten Carbide Tipped Router Bits for use on hardwood, softwood, fiberboard, plywood and particle board.

- Microgranular Tungsten Carbide tips to ensure a perfect sharpness for extra life.
- Bits made to European Safety Standard EN847-1/2 which ensures quality materials are used and that tools are balanced and are round form to reduce user injury.
- Bits are two fluted unless specified otherwise.

HOW TO ORDER

To order a router bit please state product ref, followed by shank diameter, followed by grade.
For example - U*T002X1/4 TC

STRAIGHT FLUTED

Straight Plunge Bits

Gives a clean finish to abrasive materials such as chipboard, MDF, plywood and hardwoods. For housing, grooving and mortising.

Note Diameter dimensions in **bold** denote exact size.

Suffix D is especially suited for drilling with a center tip.



Ref. U*T017



Ref. U*T046



SAFETY ANTI-KICKBACK DESIGN

Single Flute Straight

D inch	D mm	C inch	C mm	OL inch	Product Ref.	Shank Dia. 1/4"
1/8	3.2	7/16	11.1	2	U*T002	✓
1/4	6.3	1	25.4	2-3/8	U*T004	✓

Two Flute Straight





D inch	D mm	C inch	C mm	OL inch	Product Ref.	Shank Dia. 1/4" 1/2"
1/16	1.6	3/16	4.7	1-3/4	U*T012	✓ -
3/32	2.4	1/4	6.3	1-13/16	U*T014	✓ -
1/8	3.2	7/16	11.0	2	U*T016	✓ -
5/32	4.0	7/16	11.0	2	U*T017	✓ -
3/16	4.7	7/16	11.0	2	U*T024	✓ -
7/32	5.5	3/4	19.1	2	U*T025	✓ -
15/64	6.0	5/8	15.9	2-3/8	N-U*C005	- ✓
1/4	6.3	3/4	19.1	2	U*T031	✓ -
1/4	6.3	1	25.4	2-1/4	U*T032	✓ -
9/32	7.0	1	25.4	2-1/4	U*T033	✓ -
5/16	7.9	3/4	19.1	2-23/64	N-U*C011	✓ -
5/16	8.0	1	25.4	2-1/4	U*T034	✓ ✓
23/64	9.0	3/4	19.1	2-5/8	N-U*C012B	- ✓
3/8	9.5	3/4	19.1	2-1/2	U*T040	- ✓
3/8	9.5	1	25.4	2-1/4	U*T041	✓ ✓
7/16	11.1	1	25.4	2-1/4	U*T043	✓ -
15/32	12.0	3/4	19.1	2-3/4	N-U*C019A	✓ -
15/32	12.0	2-1/2	63.5	4-3/8	N-U*C172	- ✓
1/2	12.7	1	25.4	2-1/4	U*T046	✓ ✓
1/2	12.7	1-1/4	31.7	2	U*T047	- ✓
1/2	12.7	1-1/2	38.1	3-1/8	U*T048	- ✓
1/2	12.7	2	50.8	3-5/8	N-U*C153D	- ✓
1/2	12.7	2	50.8	4-1/4	U*T049	- ✓
1/2	12.7	2-1/2	63.5	4-9/64	N-U*C164	- ✓
5/8	15.9	3/4	19.1	1-15/16	U*T050	✓ -
5/8	15.9	1-1/4	31.7	2-7/8	U*T051	- ✓
23/32	18.2	3/4	19.1	2-3/8	N-U*C028B	- ✓
3/4	19.1	3/4	19.1	2	U*T054	✓ -
3/4	19.1	1-1/4	31.7	2-7/8	U*T055	- ✓
3/4	19.1	2	50.8	3-5/8	N-U*C030B	- ✓
1	25.4	3/4	19.1	2	U*T058	✓ -
1-1/8	28.5	1	25.4	2-19/32	N-U*C033H	- ✓
1-1/4	31.8	1	25.4	2-1/2	N-U*C033K	- ✓

RABBETING

Guided Rabbeting Set

Easy to set-up. Bearing acts as guide for depth of cut. Three additional bearings included to give a choice of rabbets. Rabbet sizes 1/4", 5/16", 3/8" and 7/16".

Rabbet E inch	Bearing Dia inch
7/16	3/8
3/8	1/2
5/16	5/8
1/4	3/4

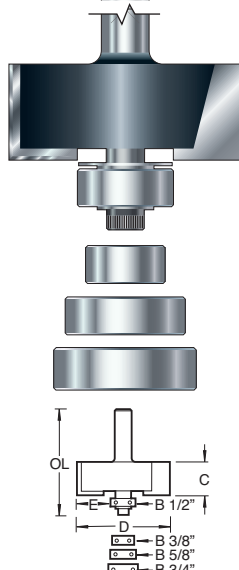

D inch	C inch	OL inch	Product Ref.	Shank Diameter 1/4" 1/2"
1-1/4	1/2	2	U*T071	✓ ✓

To rout inlays use our Inlay Kit.

See page 9 for full details.

Ref. U*INLAY/KIT/A



N.B. OL shown in table is for 1/4" shank tool. The 1/2" shank equivalent is approx. 1/2" longer.

www.trend-usa.com

N NEW SIZES ✓ Denotes availability