

OL A	A deg.	D inch	C inch	OL inch	Product Ref.	Shank Diameter 1/4"
	9°	3/8	3/8	1-1/2	U*T162	<b>V</b>
L L L	14°	1/2	1/2	1-3/4	U*T163	<b>✓</b>

# **ROUND OVER**

### & BEAD




#### **Guided Round Over Bead**


Produces a smooth round over profile, or an ovolo beading mould with quirks. Includes extra 3/8" bearing for creating a quirk for a bead mould.







Ref.



















	ir
	1
T $\sqcap$	3/
	1
R	5/
B1-€	3
B2 <del></del> ⊚⊚ <del> </del> D- <del></del>	1
, 0 -1	3

n n	υ		DI	DZ	OL	Product	Snank L	
inch	inch	inch	inch	inch	inch	Ref.	1/4"	1/2"
1/8	3/4	3/8	1/2	3/8	1-15/16	U*T171	~	-
3/16	7/8	1/2	1/2	3/8	2	U*T172	<b>/</b>	-
1/4	1	1/2	1/2	3/8	2	U*T173	~	<b>V</b>
5/16	1-1/8	1/2	1/2	3/8	2-1/16	U*T174	~	-
3/8	1-1/4	5/8	1/2	3/8	2-3/16	U*T175	~	<b>V</b>
1/2	1-1/2	3/4	1/2	3/8	2-1/4	U*T176	<b>/</b>	~
3/4	2	1	1/2	3/8	2-7/8	U*T178	-	V

## **EDGE MOULDIN**

#### **Guided Corner** Bead


Attractive edge moulds. A full corner bead can be produced by making a second pass at 90°.






Ref.

U\*T210





П	
R C	
B[0]	<u></u>
<u>→</u> D2	
• • • •	• • • •

R inch	D inch	D2 inch	C inch	B inch	Product Ref.	Shank I	
1/8	7/8	3/4	1/2	1/2	U*T210	V	-
3/16	1	7/8	5/8	5/8	№ U*C130	~	-
9/32	1-1/4	1-1/8	7/8	5/8	N U*C215	-	~



bearing guide. Ideal for decorative edge moulds.










R inch	D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter 1/4"
5/32	1	15/32	3/8	2-1/8	U*T270	<b>V</b>
1/4	1-3/8	3/4	3/8	2-1/4	U*T273	<b>~</b>

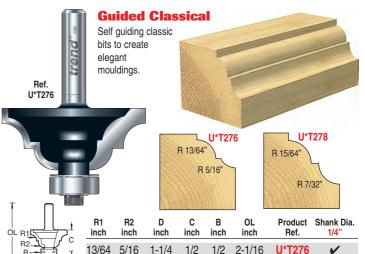



15/64

7/32

1-1/2

5/8

1/2

2-1/8

U\*T278