



Guided Wavy Edge

An interesting and attractive mould with a unique wavy effect, using chords of the radius.



Creates decorative edge for plaques.



R inch	D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter
5/32	1-1/4	5/8	1/2	2-1/4	U*T279	1/4" ✓





RADIUS & COVE

Core Box


For coves and part of a rule joint.



Ref. U*T241

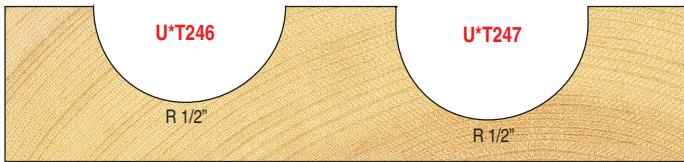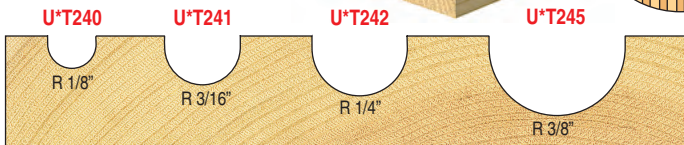

R inch	D inch	C inch	OL inch	Product Ref.	Shank Diameter 1/4"	Shank Diameter 1/2"
1/8	1/4	1/4	1-7/8	U*T240	✓	-
3/16	3/8	1/4	1-1/2	U*T241	✓	-
1/4	1/2	3/8	1-1/2	U*T242	✓	✓
3/8	3/4	7/16	1-1/2	U*T245	✓	✓
1/2	1	5/8	1-7/8	U*T246	✓	-
1/2	1	1-1/16	2-3/16	U*T247	-	✓




STAFF BEADS



Staff Bead or Nosing

These staff beads are ideal for producing nosings and attractive edges. Edge cut only.

NEW

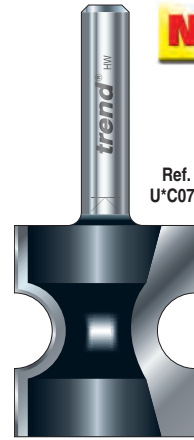


Ref. U*C070

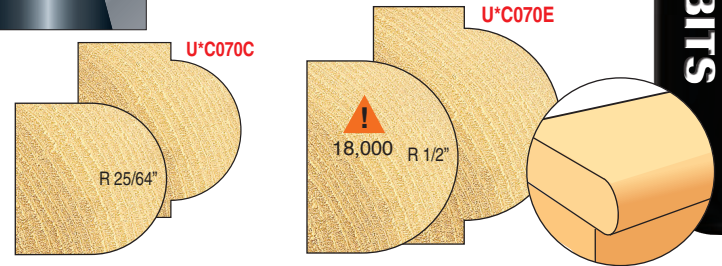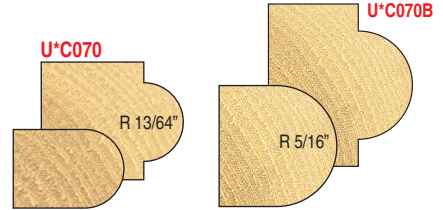


R inch	C inch	OL inch	Product Ref.	Shank Diameter 1/4"	Shank Diameter 1/2"
13/64	3/4	2-1/4	U*C070	✓	-
5/16	1-3/16	2-19/32	U*C070B	-	✓
25/64	1-3/8	2-7/8	U*C070C	-	✓
1/2	1-9/16	3-5/64	U*C070E	-	✓

Guided Cove


Ideally suited for cutting radiused edges at speed.



Ref. U*T252

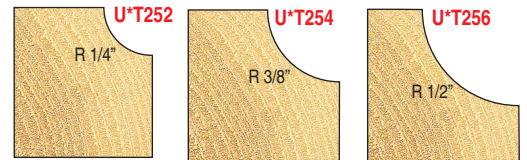

R inch	D inch	C inch	B inch	OL inch	Product Ref.	Shank Diameter 1/4"
1/4	7/8	1/2	3/8	2	U*T252	✓
3/8	1-1/8	1/2	3/8	2	U*T254	✓
1/2	1-3/8	5/8	3/8	2-1/8	U*T256	✓



TCT METRIC BORING ROUTER BITS

NEW


Router Dowel Drills

Lip and spur dowel drills for use with the Trend Craft Dovetail Jig dowelling template.

Ref. C174 can be used with the Trend Shelf Support Template. Refs. C175, C176 & C177 can be used for 6, 8 & 10mm dowels.



Ref. U*C175




D mm	C inch	OL inch	Product Ref.	Shank Dia. 1/4"
3.0	35/64	2-1/4	U*C180	✓
4.0	1-3/8	2-1/4	U*C222	✓
5.0	1-3/8	2-1/4	U*C174	✓
6.0	1-3/8	2-3/4	U*C175	✓
8.0	1-3/8	2-3/4	U*C176	✓
10.0	1-3/8	2-3/4	U*C177	✓

NEW




Router Hinge Bit

For recessing circular hinges, this machine bit has a specially designed form of scriber to allow use at high speeds. For accurate repetitive routing, a template and guide bush fitted to the router base should be used.

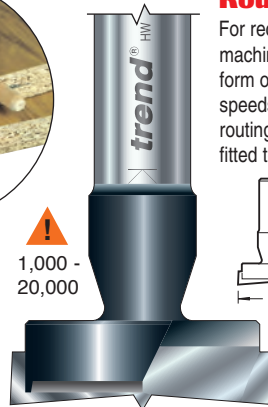

1,000 - 20,000



D inch	D mm	OL inch	Product Ref.	Shank Dia. 1/2"
1-3/8	35.0	2-3/8	U*C250	✓

✓ Denotes availability