

CONTRACTOR HINGE JIG

with adjustable apertures.

Patent No. GB2285410



Router not included.

The two piece aluminum Hinge Jig is a portable template set designed for recessing hinges in wooden doors & frames. It is easy to use with minimal setting-up time, completing the job both accurately & quickly.

- Used on-site & in joinery shops to increase productivity with excellent results.
- Four apertures for fire door requirements.
- No need for marking out in the conventional way.
- Quick & simple to set-up as the hinge is used as the pattern.
- Clean & accurate recesses are achieved every time.
- Suitable for timber based doors & square butt hinges.
- Use with a light duty router with 1/4" collet.
- TCT router bit, 15/32" diameter with 1/4" shank included Ref. U*C019AX1/4TC.
- Angled position slots to prevent creep.

Product Reference:

U*H/JIG/A



"WON 'BEST OF' IN FULL SIZE HINGE JIG CATEGORY IN TAUNTON TOOL GUIDE"



Compatibility
www.trend-usa.com/compatibility

U*H/JIG/8FT and U*H/JIG/A

Replacement Parts:

5/8" Guide Bush

Extra long projection.

Screw-on Style

U*GB/US/160



Euro Style

U*GB160



Long Reach Bit (15/32" dia.)

U*C019AX1/4TC

Carry Case

U*CASE/HJ/A

Optional Accessory:

Universal Sub-Base

Certain makes & models of router including the T4 will require a Unibase to accept the Euro Style guide bushes.

U*UNIBASE



Includes:

- 4 x Apertures
- 2 x Bradawls
- 1 x 5/8" Screw-in & Euro Style Guide Bush
- 1 x T-Handle Hex Key
- 1 x 5/32" Spacing Gauge
- 1 x Fabric Storage Case
- 1 x 1/4" Shank TCT 15/32"Ø Router Bit



Specification:

Hinge sizes possible

Length min. _____ 2-5/8"

Length max. _____ 5"

Width min. _____ 3/8"


Width max. _____ 1-3/8"

Door sizes possible

Height min. _____ 6' 5"

Height max. _____ 6' 10"

Thickness min. _____ 5/8"

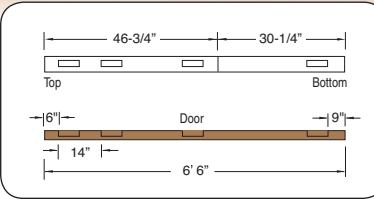

HOW IT WORKS:

Setting the Length



Setting the Width



Setting the Depth



Routing Hinge Recesses



Fitting the Door

