


KITCHEN COUNTERTOP JIG

Designed to enable all 1/2" shank plunge routers to cut precise butt & scribe joints in European style countertops. Cuts countertops from 20" to 25-5/8" wide, with Peninsular cut.

- A single male and female template in 5/8" solid laminate.
- Two apertures for panel bolt recess to suit both plastic and metal ended connecting bolts.
- Three alloy location bushes and width setting stop.
- Cuts out of square joints (max. 3°).
- TCT router bit, 1/2" diameter with 1/2" shank included Ref. U*C153DX1/2TC.

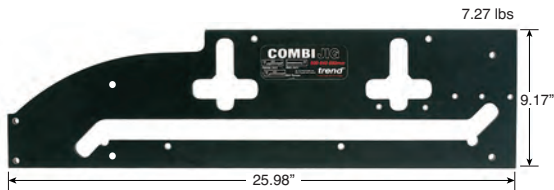

Combi Jig Features:

- Machined from hard wearing solid laminate.
- Will produce a joint in 15 minutes including setting-up time.
- Out-of-square joints can be accommodated.
- Facilities to cut various widths of board and thicknesses up to 1-1/2" .
- Integral panel bolt connector recessing template with easy spanner access.
- Width setting stop for accurate positioning.
- Supplied with clear and comprehensive instructions for use.

Jig Requires:

- A portable plunge router with 1/2" shank capacity and minimum 1.7HP.
- Two 4" throat clamps.

Product Reference:

U*COMBI66

Includes:

- 3 x Bushes
- 1 x Width Setting Stop
- 1 x 1/2" Shank TCT 1/2"Ø Router Bit
- 1 x 1-3/16" Screw-on Style Guide Bush



Replacement Part:

- Router Bit**
1/2" Ø straight TCT router bit for use with combi jig.
U*C153DX1/2TC
- 1-3/16" Screw-on Style Guide Bush**
U*GB/US/30



Optional Accessories:

Metal Ended Worktop Connectors

Panel bolt connectors to connect worktop joint together.
6" overall length.

U*PC/10/M (pack of 10)

F Clamp (4" throat)

Quick action gripper clamps (two required).

U*FC/200

Bush

U*CJ/BUSH



Carry Case

Hard wearing carry case to protect jig.

U*CASE/65



1-3/16" Guide Bush

Euro Style.

U*GB30




Universal Sub-Base

Certain makes and models of router require a Unibase to accept the Euro Style guide bushes.

U*UNIBASE

4 Functions:

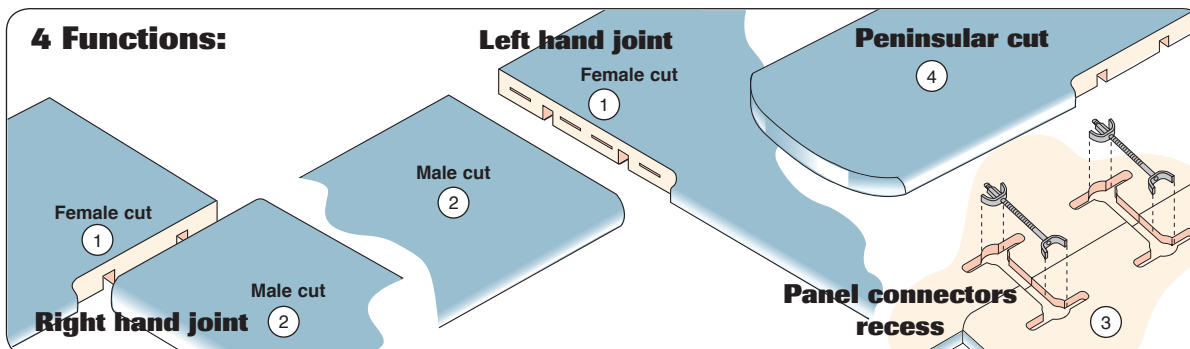

4 functions:

- 1 Female cut
- 2 Male cut
- 3 Bolt recess
- 4 Curved Peninsular



Compatibility
www.trend-usa.com/compatibility