

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- WARNING!** Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- WARNING!** To prevent the risk of sparking, short circuit and possible explosion **DO NOT** drop metal tools in the battery area, or allow them to touch the battery terminals.
- WARNING!** **DO NOT** use on any power source other than a 12Volt DC system.
- DANGER!** - Beware, lead-acid batteries generate explosive gases during normal battery operation.
- DO NOT** smoke or allow a spark or flame in the vicinity of the battery or engine.
- DO NOT** connect to a positive earthed system. Ensure the polarity is correct before connecting, red clip to positive (+) battery terminal and black clip to negative (-) battery terminal.
- DO NOT** pull the cables or clips from the battery terminals.
- DO NOT** use equipment for any purpose other than that for which it is designed.
- DO NOT** use the lamp if damaged.
- DO NOT** immerse lamp in water.
- Wash immediately with soap and water if battery acid contacts skin or clothing. If acid enters eye, flush immediately with cool clean running water for at least 15 minutes and seek immediate medical attention.
- If the battery terminals are corroded or dirty, clean them before attaching the clips.
- Before attaching to battery, remove personal metallic items such as rings, bracelets, necklaces and watches. A lead-acid battery can produce a short-circuit current which is high enough to weld such items to the vehicle and cause severe burns.
- Ensure the lamp is disconnected from the power source before attempting to change the fluorescent tube.

2. INTRODUCTION

High output lighting with even light spread and low power consumption saving on energy costs. Features integral power switch and swivel hook for easy positioning. Supplied with 12V battery clips and 5mtr cable.

3. OPERATION

3.1 CONNECTING TO BATTERY TERMINALS

NOTE: Check the battery is 12V DC. DO NOT use with a 6V or 24V battery.

- 3.1.1 Ensure battery terminals are clean, if necessary clean away any dirt or corrosion.
- 3.1.2 Check to make sure that no flammable fumes are present.
- 3.1.3 Clip the red (+) battery clip to the red positive (+) terminal post on the battery.
- 3.1.4 Clip the black (-) battery clip to the black negative (-) terminal post on the battery.
- 3.1.5 Check all connections are secure.

3.2 OPERATING THE LAMP

- 3.2.1 Press the integral power switch once to turn on the lamp and press once again to turn off the lamp.

3.3 DISCONNECTING FROM THE BATTERY TERMINALS

- 3.3.1 Unclip the black (-) battery clip from the black negative (-) terminal post on the battery.
- 3.3.2 Unclip the red (+) battery clip from the red positive (+) terminal post on the battery.
- 3.3.3 Store lamp in a safe, dry childproof area.

4. MAINTENANCE

- WARNING!** Be sure to disconnect the lamp from the power supply before carrying out any maintenance.



4.1 GENERAL MAINTENANCE

- 4.1.1 Keep the lamp clean.
- 4.1.2 Check cable for any signs of wear. If the battery clips and/or cable are worn/broken, remove the lamp from service immediately and have it repaired by a qualified electrician.

4.2 REPLACING FLUORESCENT TUBE (Refer to fig.1 & fig.2)

NOTE: Use only Sealey replacement fluorescent tubes, Part No: ML1112CB.

- 4.2.1 Disconnect from the power supply.
- 4.2.2 Remove end cap from the outer plastic tube.
- 4.2.3 Squeeze the outer plastic tube at the area of the lugs on the fluorescent tube retaining clip, allowing the clip to clamp the top of the fluorescent tube. Grip the inside of the clip with a pair of long nose pliers (not supplied) and extract the clip and fluorescent tube.
NOTE: Use caution when handling a fluorescent tube and dispose of in accordance with local authority guidelines.
- 4.2.4 Attach the fluorescent tube retaining clip to the top of the replacement fluorescent tube.
- 4.2.5 Place the replacement tube into the outer plastic tube and locate the fittings with the socket in the lamp base.
- 4.2.6 Firmly press the fluorescent tube into the lamp base ensuring that the fluorescent tube retaining clip is correctly located within the outer plastic tube.
- 4.2.7 Re-fit the end cap.

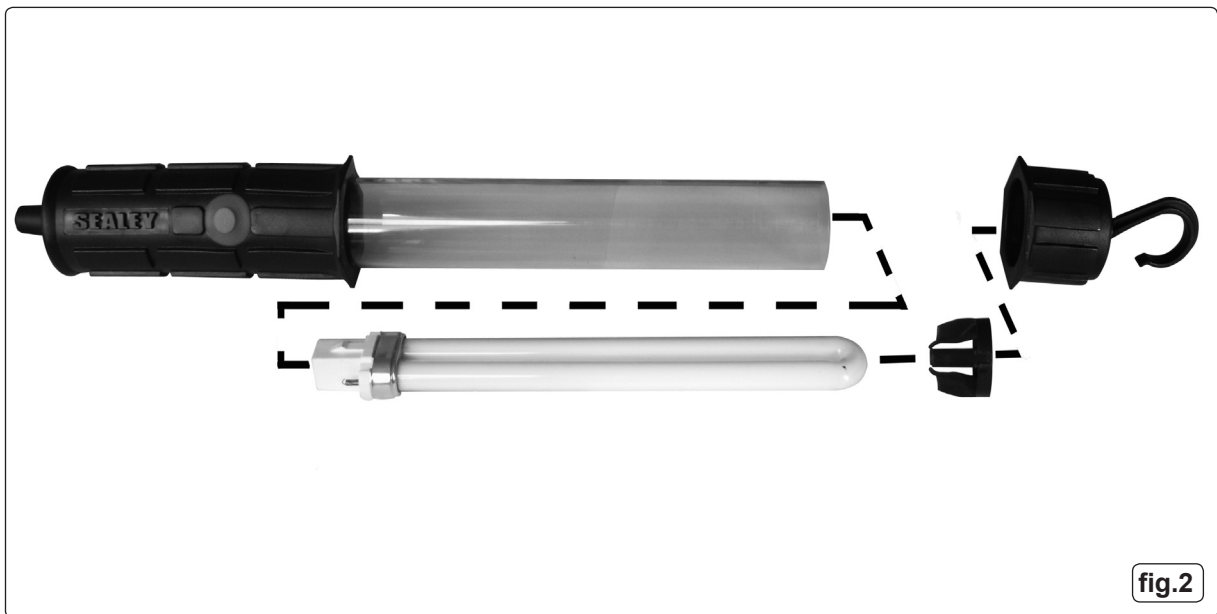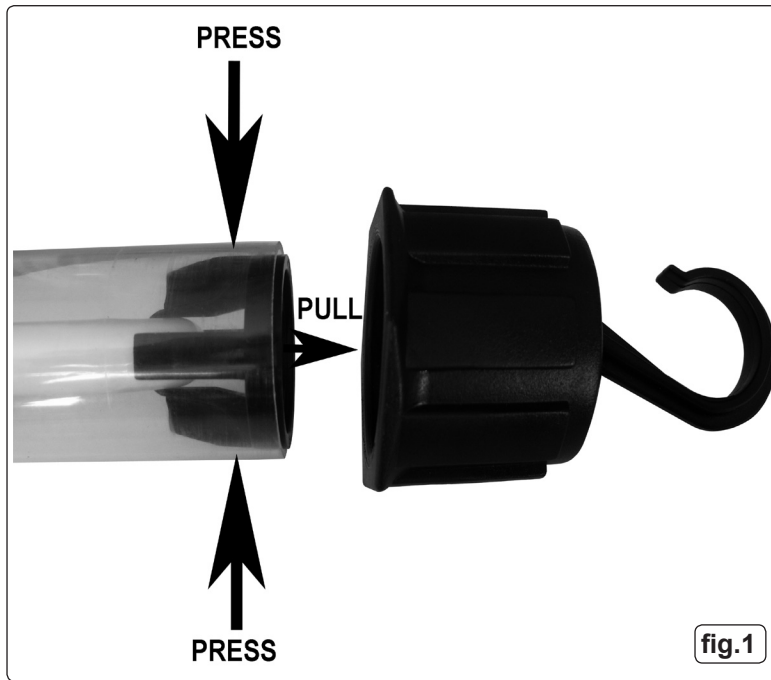

Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to www.sealey.co.uk, email sales@sealey.co.uk or phone 01284 757500.

Environmental Protection.



Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycle centre and disposed of in a manner which is compatible with the environment.



When the product is no longer required, it must be disposed of in an environmentally protective way.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR



01284 757500



www.sealey.co.uk



01284 703534



sales@sealey.co.uk