



T30 Nylon Pre-Filter Conversion Kit T30/3A

Please read carefully before use



INST/T30/3A v1.0



T30 NYLON PRE-FILTER CONVERSION KIT

REF. T30/3A

Thank you for purchasing this Trend product, which should give lasting performance if used in accordance with these instructions.

The following symbols are used throughout these instructions .



Denotes risk of personal injury, loss of life or damage to the tool in case of non-observance of the instructions.



Refer to the instruction manual of your power tool.

This unit must not be put into service until it has been established that the power tool to be connected to this unit is in compliance with 2006/42/EC (identified by the CE marking on the power tool).

INTENDED USE

This accessory is intended to be used with a T30 Dust Extractor to allow the existing nylon pre-filter cloth from the Ref. T30/3 to be replaced.

SAFETY

Please read and understand the safety points at the end of this instruction as well as the power tool instructions before use.

PLEASE KEEP THESE INSTRUCTIONS IN A SAFE PLACE.

The attention of UK users is drawn to The Provision and Use of Work Equipment Regulations 1998, and any subsequent amendments.

Users should also read the HSE/HSC Safe Use of Woodworking Machinery Approved Code of Practice and Guidance Document and any amendments.

Users must be competent in using woodworking equipment before using our products.

Please keep children and visitors away from tools and work area. All tools have a residual risk, so must therefore be handled with caution.

Only use tooling that meets EN847-1/2 safety standard and any amendments.

ITEMS REQUIRED


- Wire or side cutters.
- Pliers.
- Gloves.
- Old pre-filter.

ITEMS ENCLOSED

- A. Nylon pre-filter material only x1

DESCRIPTION OF PARTS


- A. Nylon pre-filter material only.
- B. Wire tie.
- C. Cloth ties.
- D. Wire base frame (not included).
- E. Plastic ring (not included).

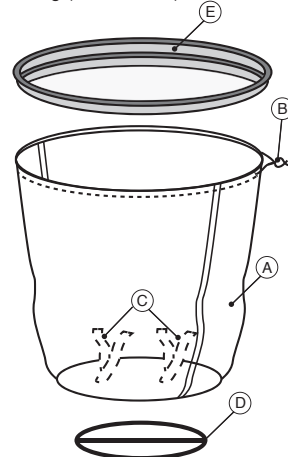


All wires are sharp. Please handle with care. Wear gloves.

OPERATION

- Remove plastic ring from old nylon pre-filter by exposing the wire, and cutting carefully with wire or side cutters. Do not cut into plastic ring.

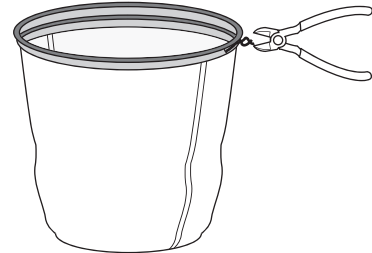

- Gently remove the plastic ring from the old pre-filter.



ENVIRONMENTAL PROTECTION 
Recycle raw materials instead of disposing as waste.

Packaging should be sorted for environmental-friendly recycling.
 The product and its accessories at the end of its life should be sorted for environmental-friendly recycling.

GUARANTEE


All Trend products are guaranteed against any defects in either workmanship or material, except products that have been damaged due to improper use or maintenance.

© Trend Machinery & Cutting Tools Ltd. 2015 E&OE
 © All trademarks acknowledged


Trend Machinery & Cutting Tools Ltd.
 Odhams Trading Estate St Albans Road
 Watford WD24 7TR England
Tel: 0044(0)1923 249911
technical@trendm.co.uk
www.trend-uk.com




- Carefully cut the seam of the loop holding the wire base frame in the old pre-filter. Remove the wire base frame. Carefully dispose of old pre-filter.




- Carefully fit new pre-filter to the old plastic ring. The filter top seam should be positioned within the groove in the old plastic ring. Ensure cloth ties are inside.



- Secure by twisting the ends of the wires using the pliers. Trim any excess of the wire using the wire cutters. Push twisted ends of wires into the groove to make safe.



- Place the wire base frame into the new pre-filter, and secure with the two ties.

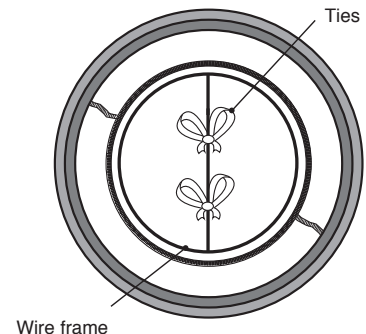

- The filter is now ready to be fitted to the T30 dust extractor.



SPARE PARTS

Please use only Trend original spare parts.

MAINTENANCE 

Please use only Trend original spare parts and accessories. The accessory has been designed to operate over a long period of time with minimum of maintenance. Continual satisfactory operation depends upon proper tool care and regular cleaning.

Cleaning

- Wear a suitable dust mask when cleaning pre-filter.

Lubrication

- Your accessory requires no additional lubrication.

Storage

- Keep pre-filter fitted to T30 dust extractor.

Safety Points

1. Disconnect power tool and attachment from power supply when not in use, before servicing, when making adjustments and when changing accessories such as cutters. Ensure switch is in "off" position and cutter has stopped rotating.
2. Read and understand instructions supplied with power tool, attachment and cutter.
3. Current Personal Protective Equipment (PPE) for eye, ear and respiratory protection must be worn. Keep hands, hair and clothes clear of the cutter.
4. Before each use check cutter is sharp and free from damage. Do not use if cutter is dull, broken or cracked or if any damage is noticeable or suspected.
5. The maximum speed (n_{max}) marked on tool or in instructions or on packaging shall not be exceeded. Where stated, the speed range should be adhered to.
6. Insert the shank into the router collet at least all the way to the marked line indicated on the shank. This ensures at least 3/4 of shank length is held in collet. Ensure clamping surfaces are clean.
7. Check all fixing and fastening nuts, bolts and screws on power tool, attachment and cutting tools are correctly assembled, tight and to correct torque setting before use.
8. Ensure all visors, guards and dust extraction is fitted.
9. The direction of routing must always be opposite to the cutter's direction of rotation.
10. Do not switch power tool on with the cutter touching the workpiece.
11. Trial cuts should be made in waste material before starting any project.
12. Repair of tools is only allowed according to tool manufacturers instructions.
13. Do not take deep cuts in one pass, take shallow passes to reduce the side load applied to the cutter.

Please see www.trend-uk.com/safety for more safety advice.



Our policy of continuous improvements mean that specifications may change without notice. Trend Machinery & Cutting Tools Ltd. cannot be held liable for any material rendered unusable, or for any form of consequential loss.