




- Especially designed for routing solid surface material, including Corian® and similar luxury solid surface material which is used in many bathrooms and kitchens.
- Cutters range from simple straights to elaborate edge moulding cutters.
- Most bearing guided cutters have plastic sleeves fitted to protect the workpiece.

BEARING GUIDED ROMAN OGEE

For finishing undermount bowl.

Ref. 7/96

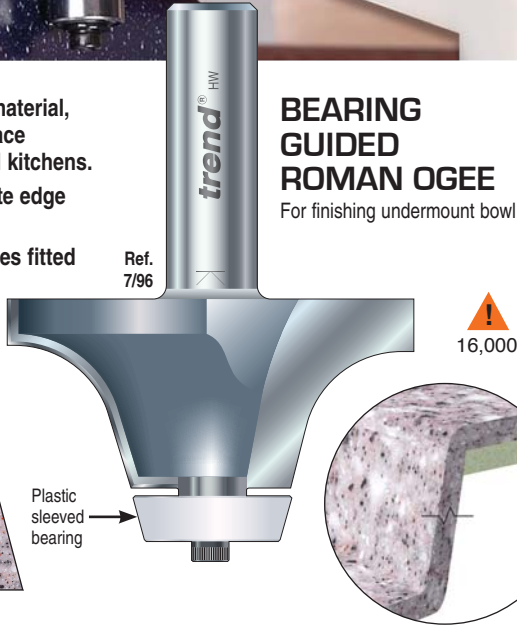

WITHOUT LIP


A Deg.	R mm	D mm	C mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
75°	12.7	54.0	25.0	7/96	£94.09	£94.09
75°	14.0	57.0	32.0	7/97	£100.14	£100.14

WITH LIP



A Deg.	R mm	D mm	C mm	C2 mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
72°	12.7	57.0	19.0	25.4	7/98	£101.71	£101.71
72°	14.0	60.7	25.0	32.0	7/99	£110.46	£110.46

SINGLE FLUTE

Eccentric single flute cutter. For fast free cutting, when cutting speed takes preference over finish.

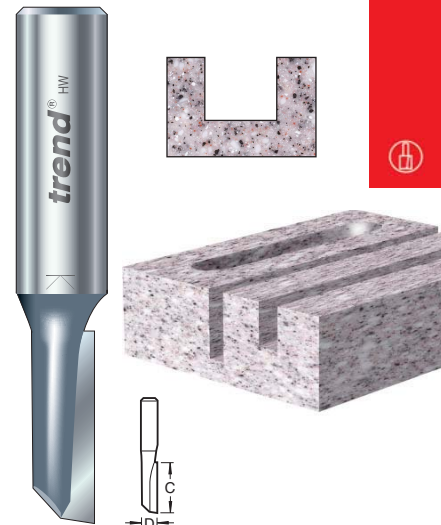


D mm	C mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
9.5	25.4	2/7	£27.97	£27.97

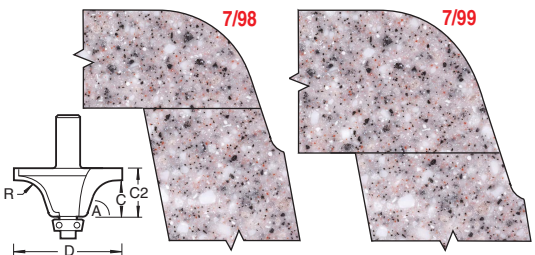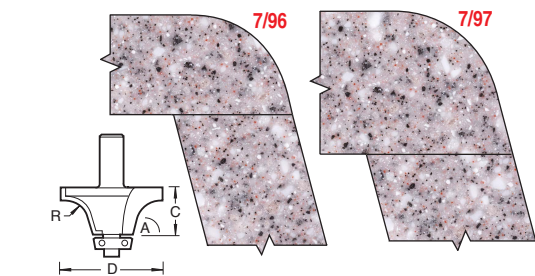

BEARING GUIDED UNDERCUT BULLNOSE COMBINATION

For bullnose moulding use Ref. 90/20 in conjunction with Ref. 90/25 and Ref. 90/21 with Ref. 90/28. See right.

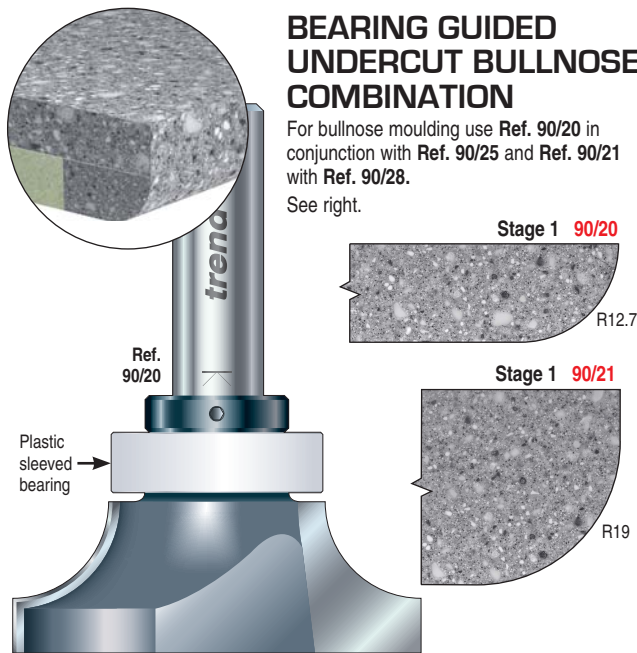


Stage 1 90/20

Stage 1 90/21

BEARING GUIDED BULLNOSE ROUND OVER COMBINATION

For bullnose moulding use Ref. 90/25 in conjunction with Ref. 90/20 and Ref. 90/28 with Ref. 90/21. See left.

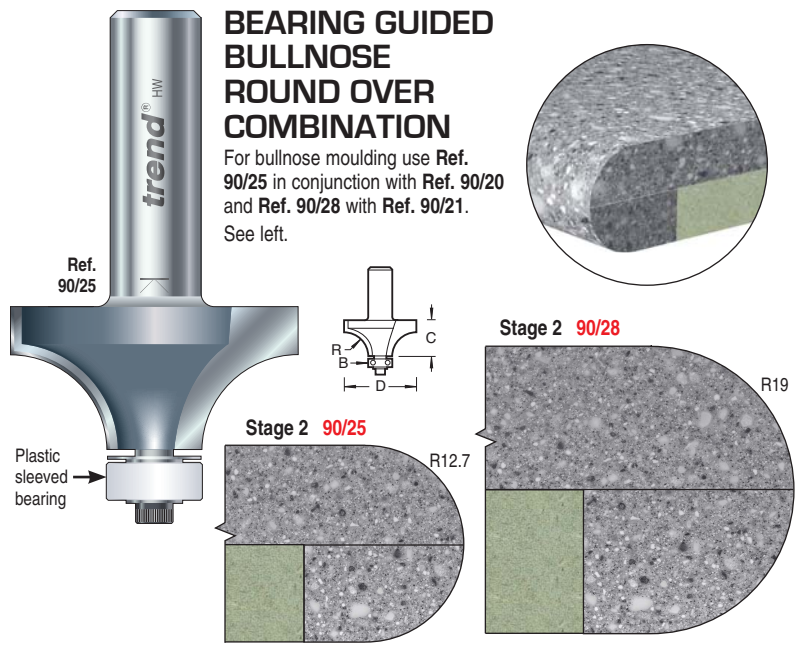

Stage 2 90/25

Stage 2 90/28

Stage 2 90/26


R mm	D mm	C mm	B mm	Product Ref.	Shank Diameter 12mm	Shank Diameter 1/2"
12.7	54.0	20.0	28.6	90/20	£124.12	£124.12
19.0	67.0	25.0	28.6	90/21	£122.65	£122.65

R mm	D mm	C mm	B mm	Product Ref.	Shank Diameter 1/4"	Shank Diameter 12mm	Shank Diameter 1/2"
12.7	38.0	19.0	12.7	90/25	-	£62.37	£62.37
19.0	50.0	25.0	12.7	90/28	-	£72.53	£72.53
8.0	27.0	12.5	12.7	90/26	£60.43	£60.43	£60.43

SIX WING TRIMMER

For trimming bowls, trepanning and face milling.

Face milling to provide a flat surface for waste fitting.

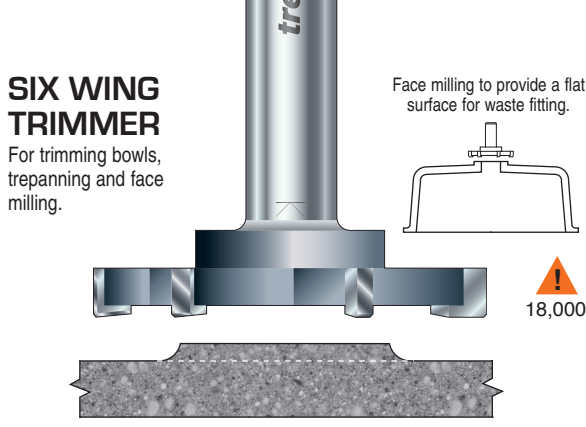


OL	D	C	OL	Product Ref.	Shank Dia.	Shank Dia.
mm	mm	mm	mm		12mm	1/2"
83.0	52.3	6.5	83.0	90/22	£66.12	£66.12

18,000

SINK REMOVING CUTTER

Specialist tool to remove sink from the worktop.

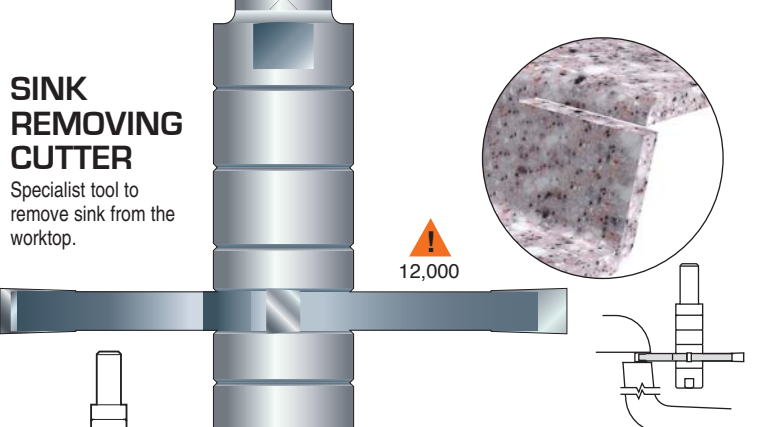


D	C	OL	Product Ref.	Shank Dia.
mm	mm	mm		1/2"
75.0	6.0	89.0	92/28	£105.59

12,000

UPSTAND


To create an attractive backplash.

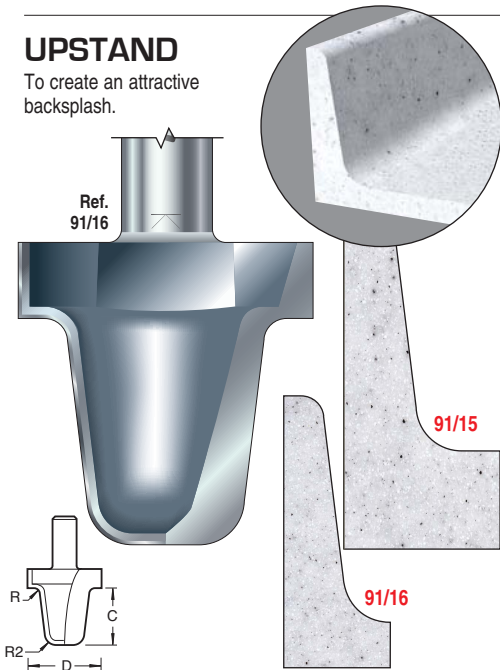

R	R2	D	C	Product Ref.	Shank Diameter
mm	mm	mm	mm		12mm
3.0	6.0	39.0	30.0	91/16	£133.89

BEARING GUIDED DOUBLE ROUNDING OVER


Two rounded corners can be cut simultaneously.

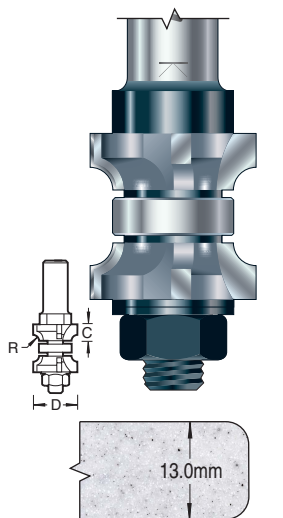

R	C	B	Product Ref.	Shank Dia.
mm	mm	mm		1/2"
3.0	9.0	16.0	753	£133.89

SHANK MOUNTED BEARING GUIDED UNDERCUT BEVEL

For use when working on the reverse face of the material.

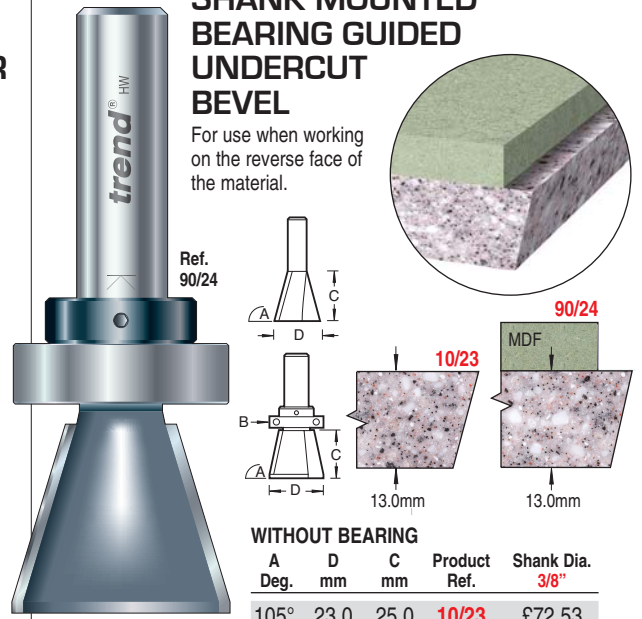

Ref. 90/24


A	D	C	Product Ref.	Shank Dia.
Deg.	mm	mm		3/8"
105°	23.0	25.0	10/23	£72.53

SHANK MOUNTED BEARING

A	D	C	B	Product Ref.	Shank Dia.
Deg.	mm	mm	mm		12mm
78°	28.5	25.0	29.0	90/24 +	£70.86

BEARING GUIDED FACE INLAY


Creates groove for insertion of inlays.

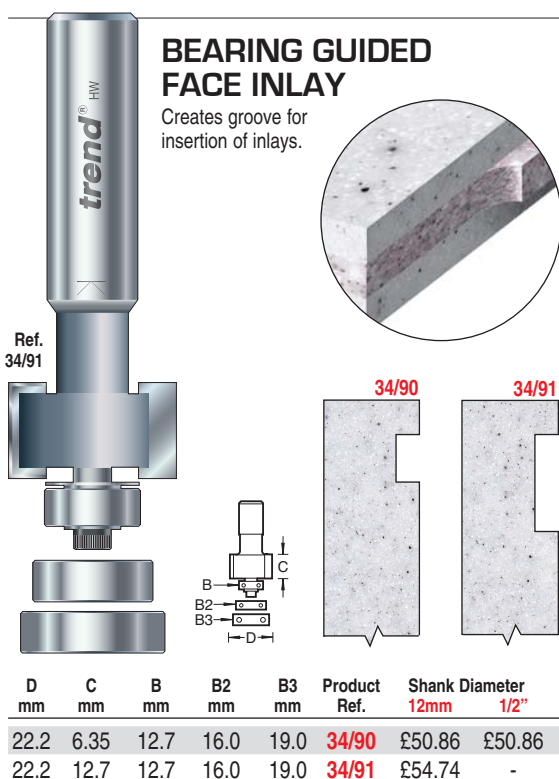

D	C	B	B2	B3	Product Ref.	Shank Diameter	Shank Diameter
mm	mm	mm	mm	mm		12mm	1/2"
22.2	6.35	12.7	16.0	19.0	34/90	£50.86	£50.86
22.2	12.7	12.7	16.0	19.0	34/91	£54.74	-

BEVEL

Tool Ref. 11/60 is designed to trim surface to suit an undermount bowl.

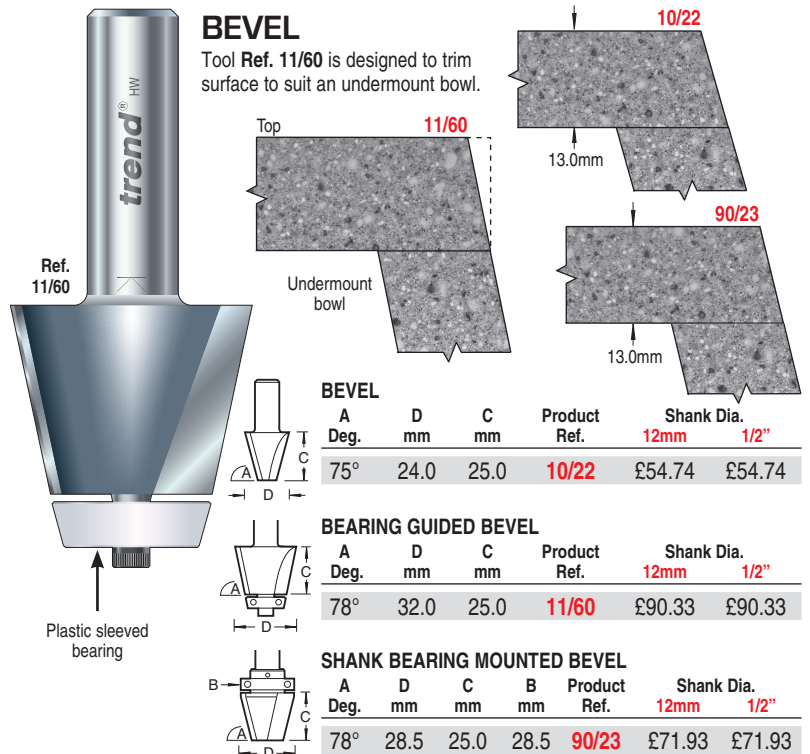


Ref. 11/60

A	D	C	Product Ref.	Shank Dia.	Shank Dia.
Deg.	mm	mm		12mm	1/2"
75°	24.0	25.0	10/22	£54.74	£54.74



A	D	C	Product Ref.	Shank Dia.	Shank Dia.
Deg.	mm	mm		12mm	1/2"
78°	32.0	25.0	11/60	£90.33	£90.33

A	D	C	B	Product Ref.	Shank Dia.	Shank Dia.
Deg.	mm	mm	mm		12mm	1/2"
78°	28.5	25.0	28.5	90/23	£71.93	£71.93

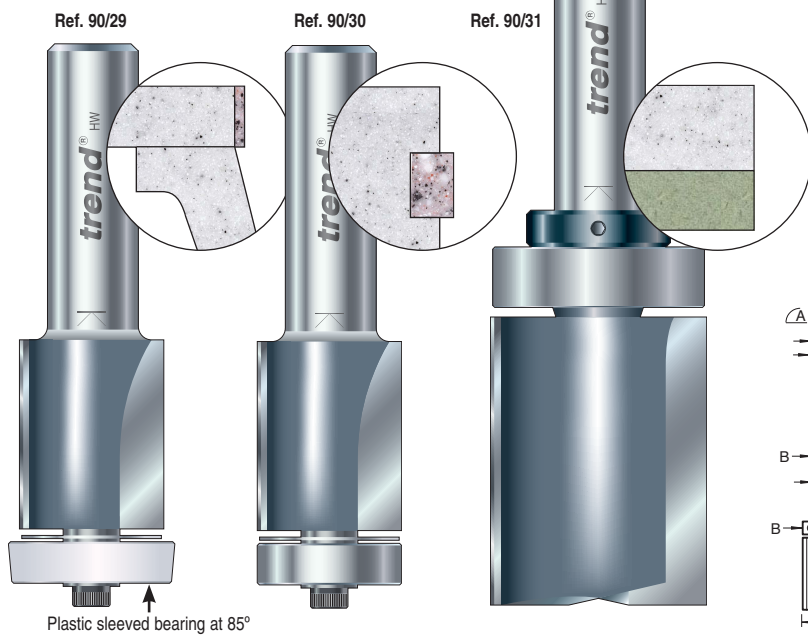


BEARING GUIDED TRIMMER

Self guided tools for trimming inlay or overlaps.




BEARING GUIDED OVERLAP TRIMMER

A Deg.	D mm	D2 mm	C mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
90°	22.0	19.1	25.0	90/29	£36.94	£36.94



BEARING GUIDED INLAY TRIMMER

A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
90°	19.0	25.0	19.0	90/30	£30.51	£30.51





SHANK BEARING MOUNTED TRIMMER

A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
90°	28.6	38.1	28.6	90/31	£52.19	£52.19

Plastic sleeved bearing at 85°

DISHED OGEE


The roman ogee Ref. 90/32 is used to form a waterfall edge with Ref. 90/26. Ref. 90/34 is used to create a shadow line with flush mount sinks.

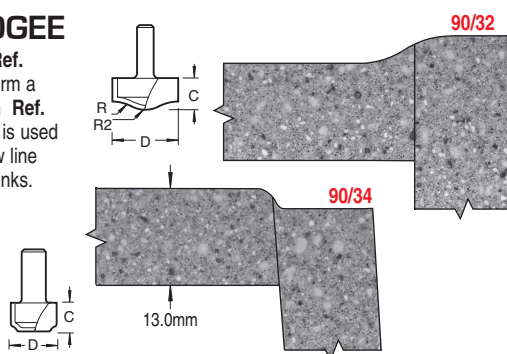

R mm	R2 mm	D mm	C mm	Product Ref.	Shank Diameter 1/4"	Shank Diameter 12mm	Shank Diameter 1/2"
16.0	11.0	25.4	12.0	90/32	£55.35	£62.37	£62.37
-	-	24.0	15.0	90/34	-	£55.35	£55.35

TONGUE & GROOVE JOINTING SET

For use with 6mm material. Supplied with 2 x 4mm, 1 x 2mm groover and 1 x 41mm and 1 x 43mm diameter bearings.

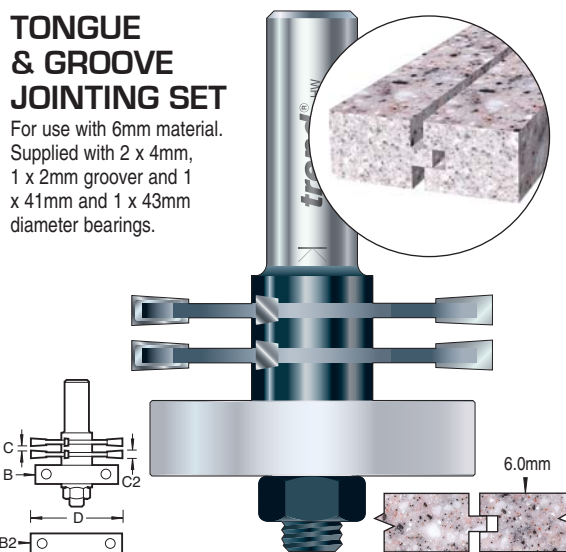


D mm	C mm	C2 mm	B mm	B2 mm	Product Ref.	Shank Diameter 1/2"
47.7	2.0	4.0	41.0	43.0	91/20 +	£100.14

STC

SINGLE 'O' FLUTE SPIRAL


- Special high grade 'O' flute ground carbide for a fast & smooth cut in a variety of woods & plastics.
- Super high polished cutting edge with unique mirror finish, resulting in clean cuts, less chance of chip re-welding, effortless chip removal, a superior finish & a longer tool life.

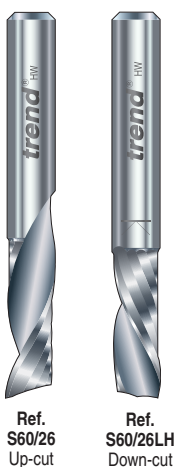

D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
6.35	19.0	51.0	S60/26	£47.83
6.35	19.0	51.0	S60/26LH	£47.83

WAVY


For edge to edge jointing giving a longer glue line. Increases the glue line by 27%.

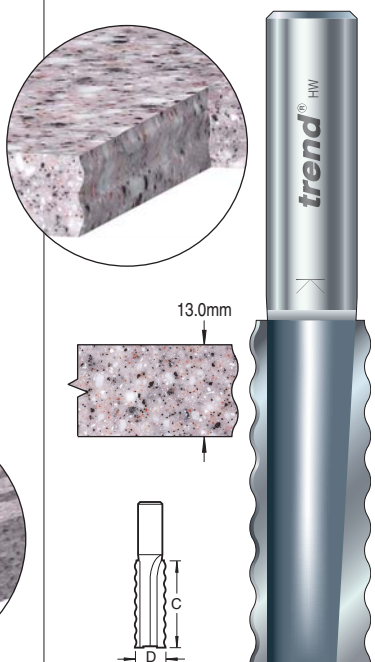

D mm	C mm	Product Ref.	Shank Dia. 12mm	Shank Dia. 1/2"
16.0	45.5	91/1	£75.68	£75.68

BEARING GUIDED WATERFALL EDGE

Creates the waterfall edge on worktops.

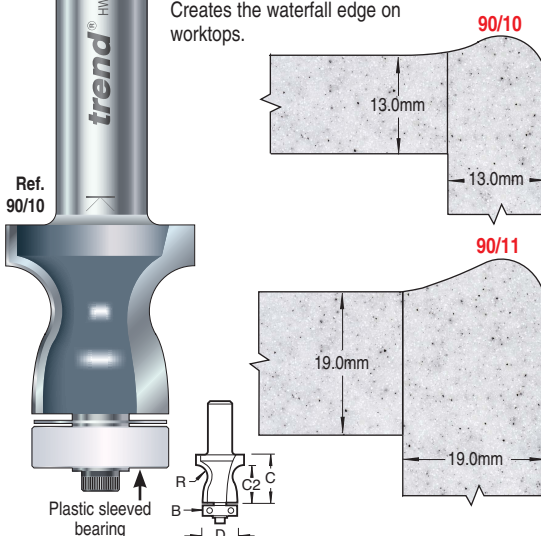

R mm	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Diameter 12mm	Shank Diameter 1/2"
6.0	25.0	22.0	16.0	19.0	90/10	£68.64	£68.64
6.0	25.0	29.0	24.0	19.0	90/11	£73.75	£73.75



PCD/DP

POLYCRYSTALLINE DIAMOND TIPPED CUTTERS

Polycrystalline Diamond (PCD) tipped cutters give a significant increase in tool life compared to TC tooling due to their high wear resistance.

PCD also gives an accuracy of cut throughout the tool life and faster feed rates as well as reduced downtime.



For use in fixed head, NC or CNC routers only. For fixed head with auto feed, CNC or NC only. Not for use in hand routers (except Ref. PCD/GEM01).

Applications: Use on MDF, HDF, hard natural timber, veneered and laminated particle board, plywood, hardboard and solid laminate.

SUITABLE FOR:


Hardwoods

Man-made Boards



DISPOSABLE PCD FOR MDF

- Single flute with TC plunge tip.
- For MDF, hardboard & solid laminate.
- Single flute prevents edge lines.
- High wear resistance.
- Longer tool life and therefore reduced downtime.
- Cannot be resharpened.

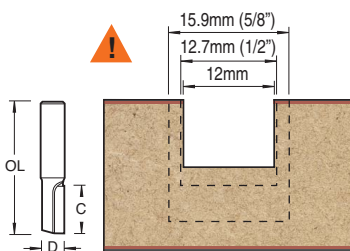


Ref. PCD/10		D	D	C	OL	Product Ref.	Shank Dia.
		inch	mm	mm	mm		12mm 1/2"
-	12.0	25.0	68.0	PCD/01	£156.40	-	
1/2	12.7	25.4	68.0	PCD/10	-	£133.89	
5/8	15.9	25.4	68.0	PCD/11	-	£156.40	




SERVICEABLE PCD FOR MDF

- Single flute with TC plunge tip.
- For MDF, hardboard & solid laminate.
- Single flute prevents edge lines.
- Can be serviced for extended life.
- High wear resistance.




Ref. PCD/20		D	D	C	OL	Product Ref.	Shank Dia.
		inch	mm	mm	mm		1/2"
1/2	12.7	25.4	68.0	PCD/20	£223.90		
5/8	15.9	25.4	68.0	PCD/21	£223.90		
3/4	19.1	25.4	68.0	PCD/22	£223.90		



PCD FOR GEMSTONE WORKTOPS


- Specifically designed for Gemstone worktop which has 6mm solid material bonded to a chipboard core.
- For use with a hand held router and jig. Please see website for more information.

D	D	C	OL	Product Ref.	Shank Dia.
inch	mm	mm	mm		1/2"
1/2	12.7	39.0	89.0	PCD/GEM01	£157.40





SERVICEABLE PCD FOR CHIPBOARD

- Segmented tip with TC plunge tip.
- For laminated/veneered chipboard and plywood.
- Up-cut and down-cut shear to prevent breakout for veneers and laminates.
- Can be serviced for extended life.
- High wear resistance.



Chipboard grooving






D	D	C	OL	Product Ref.	Shank Dia.
inch	mm	mm	mm		1/2"
1/2	12.7	25.4	68.0	PCD/30	£201.40
5/8	15.9	25.4	68.0	PCD/31	£212.65
3/4	19.1	25.4	68.0	PCD/32	£212.65



SERVICEABLE T-SLOT

- Segmented tip for MDF.
- High wear resistance.
- Slat wall cutter to accept a plastic extrusion.
- Can be serviced for extended life.

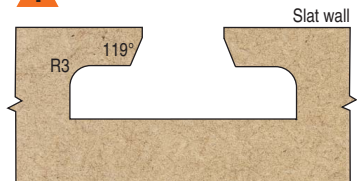

D	C1	C2	R	A	Product Ref.	Shank Dia.
mm	mm	mm	mm	Deg.		1/2"
30.0	7.0	15.0	3.0	119°	PCD/40	£325.16