


## PROFILE SCRIBING TOOLING

## **COMBINATION & EASYSET**








Instructions supplied

Timber thickness Min. 18.0mm


Max. 22.0mm




- With the combination type, components are re-arranged on the arbor to cut the profile or the scribe.
- . The Easyset system works by altering the height of the cutter.


18.000


Router table use only. 1/4" and 8mm shanks should only be used with a medium or heavy duty router. For certain routers the aperture in the base may need to be enlarged. A workholding device should be used when cutting the scribe cut on the rail ends. The cutting edges should be staggered to each other. When using Easyset cutters, take several passes. When using these sets at the minimum material thickness, the height of the top quirk may be reduced.

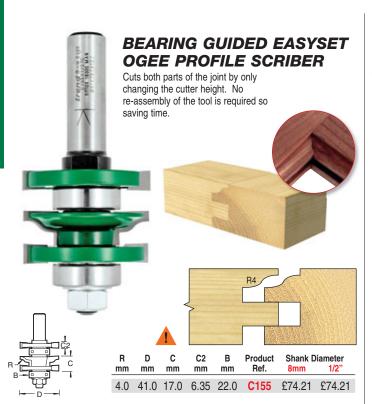

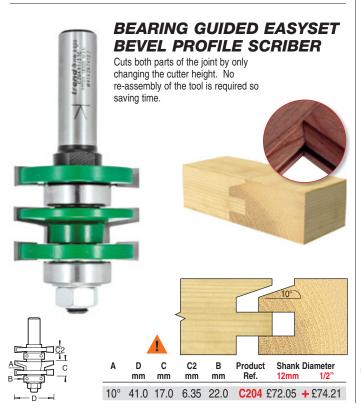


## **BEARING GUIDED COMBINATION OGEE PROFILE SCRIBER**




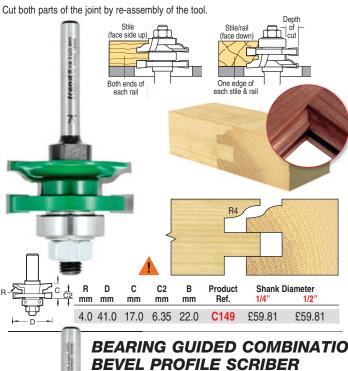



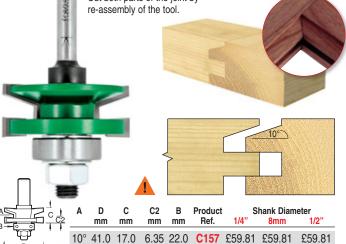

## **BEARING GUIDED COMBINATION** FLAT CLASSIC PROFILE SCRIBER

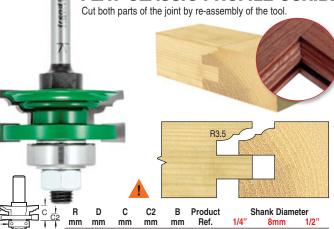

3.5 41.0 17.0 6.35 22.0 **C156** £59.81 £59.81 £59.81