



NEW PLASTICS & COMPOSITES

ALCUBOND® GROOVE CUTTER

- Specially designed tool for aluminium composite cladding material such as Alucobond® and Dibond® which comprises of an aluminium cover with a polyethylene core.
- Use at 12,000 to 15,000 RPM and feed speed of 400 - 600mm/min.

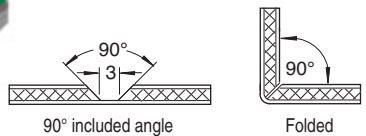


12,000 - 15,000

Included Angle	A Deg.	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
90°	45°	13.0	10.0	57.0	C300	£34.54

ABS/PVC STRAIGHT

- Used to slot and trim low melting point plastics such as ABS, Styrene and PVC.
- Single flute for fast cutting.



D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
6.3	25.0	65.0	C301	£17.26

JOINTING CUTTERS




MITRE LOCK JOINTER

Ideal for speaker cabinets and drawer construction.

Please note. This tool cannot be re-sharpened. Inverted use only.

INST
Instructions supplied
24,000





A Deg.	D mm	C mm	C2 mm	Product Ref.	Shank Dia. 1/4"
45°	42.0	14.3	4.0	C189	£52.80

LARGE MITRE LOCK JOINTER

Ideal for speaker cabinets and drawer construction.

Please note. This tool cannot be re-sharpened. Inverted use only.



INST
Instructions supplied
16,000



A Deg.	D mm	C mm	C2 mm	Product Ref.	Shank Dia. 1/2"
45°	68.0	30.0	12.5	C188	£72.24

BEARING GUIDED FINGER JOINTER


One-piece tool to increase gluing area for edge to edge joints.



D mm	C mm	B mm	Product Ref.	Shank Dia. 1/2"
35.0	38.1	19.1	C219	£74.21

OFFSET TONGUE & GROOVE

A reversible finger jointer, to increase the gluing area for edge to edge joints.



D mm	D2 mm	C mm	Product Ref.	Shank Dia. 1/2"
40.0	31.0	32.0	C192	£62.59