


SLOTTING & GROOVING

ONE-PIECE SLOTTING CUTTER

These two wing Tungsten Carbide Tipped slotting cutters are ideal for grooving and rebating operations. A 12.7mm diameter bearing is supplied with every cutter giving a 9.5mm groove depth. Depth of cut can be changed by purchasing alternative bearing sizes. Easy to set-up and use. Hex key is supplied. N.B. The grooving section of this tool cannot be detached from the shank.











£6.06


Price £4.74





C146







C144A


0.0	0,0	01.0		0.0	•	
10.0	-	31.8	12.7	9.5	C148	£
BEARING	GS		E mm		Product F	₹ef.
25.0mm	Ø		3.2		B25A	
22.0mm	Ø		4.8		B22A	
19.0mm	Ø		6.3		B19A	
16.0mm	Ø		7.9		B16A	
SPARE BEARING			E mm		Product Ref.	
12 7mm	Ø		9.5		R127Δ	


С D В Е **Shank Diameter** С Product mm inch inch Ref. mm mm 1/4 8mm 3.0 31.8 12.7 9.5 C143A £22.27 3.2 1/8 31.8 12.7 9.5 C143 £22.27 4.0 31.8 12.7 9.5 C144A -£22.27 4.7 3/16 31.8 12.7 9.5 C144 £22.27 6.0 9.5 C145A £24.22 31.8 12.7 . 6.3 1/4 31.8 12.7 9.5 C145 £24.22 8.0 5/16 31.8 12.7 9.5 C146 £24.22 9.5 3/8 31.8 12.7 9.5 C147 £25.43 £25.43 uct Ref. Price £10.90 £10.90 £7.64


BEARING GUIDED ONE PIECE BISCUIT JOINTER

This two wing self-guiding Tungsten Carbide Tipped slotting cutter is ideal for biscuit jointing. The set is supplied with three ball bearing guides to suit the three sizes of biscuits available. A slightly longer cut than the length of the biscuit is required for ease of alignment during assembly.











No.10 53mm x 19mm x 4mm Suitable for 13 - 18mm board

Profiles showing cross-section











B = 0 0 B2 = 0 0
B3 = 0


С	D	В	B2	B3	Product		Shank Diameter		
mm	mm	mm	mm	mm	Ref.	1/4"	8mm	12mm	1/2"
4 0	37.2	127	16.0	19.0	C152	£38 16	£38 16	£38 16	£38 16

Product Ref.	Price
B127A	£4.74
B16A	£6.06
B19A	£7.64
	B127A B16A


KEYHOLE For picture hanging flush to the wall. Plunge cutter and move forward, then retract out from entry hole. A template is recommended. For No.8 and No.10 screw heads. Not suitable for grooving applications. Instructions supplied ID H D2 С D **Shank Diameter** Product 1/4" Ref. 8mm mm mm mm mm £19.74 £19.74 9.5 4.5 4.5 5.5 C120

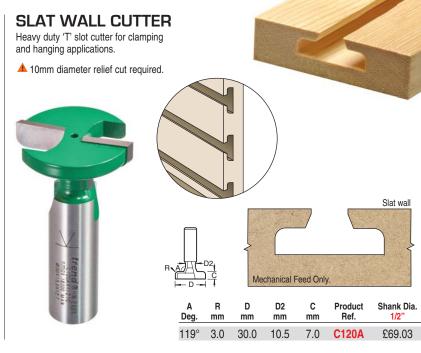

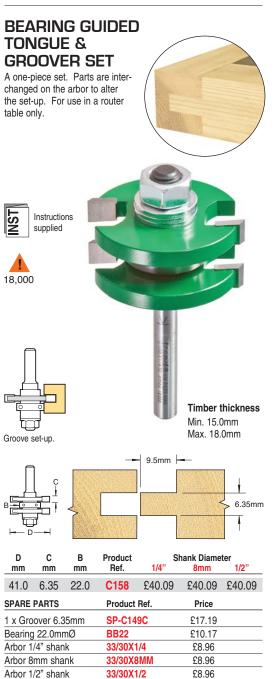

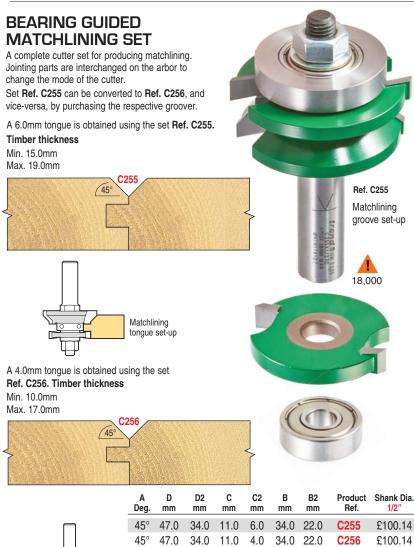

COMPRISES







£7.64

SP-C255A

£31.48

SPACER/8

Spacer set