


# MITRE SAW CROSSCUTTING

For crosscutting applications on mitre and radial arm saws. Blades have a negative hook angle, to minimise 'pick up' and 'snatching'.



## ALTERNATE TOP BEVEL TOOTH FORM

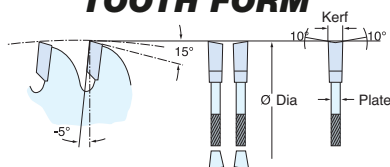

\* T = Anti-kickback with thin kerf for cordless saws. Blades QSN0. CT12.3, CT19.1, CT25A, CT30.3 are for Dewalt Flex Volt and have raker tooth.

\* PTFE Non-stick coated.

Blade Type	Quick Selector No.	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
○●	CT12.3	184	7-1/4	24	16	-	1.6	1.0	CSB/CC18424T	£33.27
○●	CT12.3	184	7-1/4	48	16	-	1.6	1.0	CSB/CC18448T	£34.97
○●	CT12.3	184	7-1/4	60	16	-	1.6	1.0	CSB/CC18460T	£38.24
○●	C15	190	7-1/2	24	30	20	2.6	1.7	CSB/CC19024	£27.79
○●	C15	190	7-1/2	48	30	20	2.6	1.7	CSB/CC19048	£29.90
○●	CT14.1	190	7-1/2	48	20	-	1.9	1.4	CSB/CC19048T	£31.69
○●	CT14.1	190	7-1/2	60	20	-	1.9	1.4	CSB/CC19060T	£33.88
○●	C15	190	7-1/2	60	30	20	2.6	1.7	CSB/CC19060	£33.34
○●	C18	210	8-1/4	48	30	-	2.8	1.8	CSB/CC21048	£34.14
○●	C18A	215	8-1/2	48	30	-	2.6	1.7	CSB/CC21548	£36.14
○●	C18A	215	8-1/2	60	30	-	2.6	1.7	CSB/CC21560	£41.69
○●	C19	216	8-1/2	24	30	-	2.6	1.7	CSB/CC21624	£32.53
○●	CT19.1	216	8-1/2	24	30	-	2.16	1.56	CSB/CC21624T	£33.90
○●	CT19.1	216	8-1/2	36	30	-	2.16	1.56	CSB/CC21636T	£35.55
○●	C19	216	8-1/2	48	30	-	2.6	1.7	CSB/CC21648	£36.14
○●	C19	216	8-1/2	60	30	-	2.6	1.7	CSB/CC21660	£39.70
○●	CT19.1	216	8-1/2	60	30	-	2.16	1.56	CSB/CC21660T	£40.85
○●	C25	250	10 nom.	24	30	16, 20 or 25.4	3.0	2.0	CSB/CC25024	£39.70
○●	CT25A	250	10 nom.	24	30	-	2.16	1.56	CSB/CC25024T	£39.25
○●	C25	250	10 nom.	42	30	16, 20 or 25.4	3.0	2.0	CSB/CC25042	£43.81
○●	CT25A	250	10 nom.	60	30	-	2.16	1.56	CSB/CC25060T	£51.98
○●	C25	250	10 nom.	72	30	16, 20 or 25.4	3.0	2.0	CSB/CC25072	£52.12
○●	CT26	254	10	24	30	-	2.5	1.8	CSB/CC25424*	£42.21
○●	CT26	254	10	40	30	-	2.5	1.8	CSB/CC25440*	£44.88
○●	CT26	254	10	60	30	-	2.5	1.8	CSB/CC25460*	£56.78
○●	C27	255	10	42	30	-	2.4	1.8	CSB/CC25542	£42.49
○●	C27	255	10	72	30	-	2.4	1.8	CSB/CC25572	£49.38
○●	C28	260	10-1/4	24	30	-	2.6	2.0	CSB/CC26024	£36.14
○●	C28.1	260	10-1/4	40	30	-	2.3	1.8	CSB/CC26040	£39.34
○●	C28	260	10-1/4	42	30	-	2.6	2.0	CSB/CC26042	£42.49
○●	C28.2	260	10-1/4	60	30	-	2.5	2.0	CSB/CC26060	£52.67
○●	C28	260	10-1/4	60	30	-	2.6	2.0	CSB/CC26060*	£54.24
○●	C28	260	10-1/4	72	30	-	2.6	2.0	CSB/CC26072	£49.38
○●	C28.1	260	10-1/4	80	30	-	2.3	1.3	CSB/CC26080	£49.17
○●	C30	305	12	24	30	-	3.0	2.0	CSB/CC30524	£48.04
○●	C30.2	305	12	40	30	-	2.5	1.8	CSB/CC30540	£49.17
○●	C30	305	12	48	30	-	3.0	2.0	CSB/CC30548	£56.37
○●	C30.2	305	12	60	30	-	2.5	1.8	CSB/CC30560	£53.54
○●	C30	305	12	60	30	-	3.0	2.2	CSB/CC30560A	£53.54
○●	CT30.3	305	12	60	30	-	2.44	1.6	CSB/CC30560T	£54.11
○●	C30	305	12	64	30	-	3.0	2.0	CSB/CC30564	£59.81
○●	CT30.3	305	12	78	30	-	2.44	1.6	CSB/CC30578T	£65.78
○●	C30.2	305	12	96	30	-	2.5	1.8	CSB/CC30596	£73.21
○●	C30	305	12	108	30	-	3.0	2.0	CSB/CC305108	£91.47


# ALUMINIUM/PLASTIC & WORKTOPS

Blades have negative hook angle.



Use a wax lubricant for cutting aluminium.

## TRIPLE CHIP TOOTH FORM

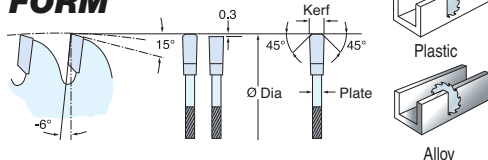

Blade Type	Quick Selector No.	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
●	7.1	160	6-1/4	52	20	-	2.2	1.6	CSB/AP16052	£49.15
●	8B.1	165	6-1/2	48	20	-	2.0	1.8	CSB/AP16548	£36.54
●	12	184	7-1/4	58	16	-	2.8	1.9	CSB/AP18458	£37.57
●	12.2	184	7-1/4	58	30	-	2.8	1.9	CSB/AP18458A	£39.34
●	15	190	7-1/2	60	30	20	2.8	1.9	CSB/AP19060	£41.02
●	C18A	215	8-1/2	64	30	-	2.8	1.9	CSB/AP21564	£54.91
●	C19	216	8-1/2	64	30	-	2.8	1.9	CSB/AP21664	£52.30
●	C19.2	216	8-1/2	64	30	-	2.3	1.7	CSB/AP21664A	£50.78
●	C19	216	8-1/2	80	30	-	2.8	1.9	CSB/AP21680	£59.28
●	25	250	10 nom.	84	30	16, 20 or 25.4	3.0	2.0	CSB/AP25084	£66.03
●	25	250	10 nom.	100	30	-	3.0	2.0	CSB/AP250100	£68.96
●	26	254	10	80	30	-	2.8	1.8	CSB/AP25480	£62.59
●	26	254	10	96	30	-	2.8	1.8	CSB/AP25496	£71.60
●	28	260	10-1/4	96	30	25	2.8	2.0	CSB/AP26096	£71.60
●	29	300	11-7/8	96	30	-	3.0	2.0	CSB/AP30096	£77.80
●	C30	305	12	80	30	-	3.0	2.2	CSB/AP30580	£65.41
●	30	305	12	84	30	-	3.0	2.0	CSB/AP30584	£66.03

# CRAFTPRO BUSHING WASHERS (REDUCING RINGS)

All CraftPro Bushing Washer Refs. CSB/BW.. Priced at £2.51 each.

Use 1.1mm thick for blades up to 180mmØ  
Use 1.5mm thick for blades 190-235mmØ  
Use 1.7mm for blades 250mmØ



Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into body of Trend CRAFTPRO sawblades only. Loose bushing washers/rings must not be used.

Outside Dia. (OD) mm	Inside Dia. (ID) mm	Thickness mm	Product Ref.	Outside Dia. (OD) mm	Inside Dia. (ID) mm	Thickness mm	Product Ref.
20	12.7 (1/2")	1.1	CSB/BW27	30	20	1.5	CSB/BW15A
20	16	1.1	CSB/BW17	30	20	1.7	CSB/BW15B
30	16	1.1	CSB/BW45	30	25	1.5	CSB/BW12A
30	16	1.5	CSB/BW45A	30	25	1.7	CSB/BW12
30	16	1.7	CSB/BW45B	30	25.4 (1")	1.3	CSB/BW14A
30	20	1.1	CSB/BW15	30	25.4 (1")	1.7	CSB/BW14