


DOOR STAND

Holds door on its edge while routing a hinge recess and mortise for locks.

- Allows door to be tilted back to assist fitting into frame.
- Holds door securely while routing, planing and drilling.
- Non-scratch base.
- Adjustable clamp for doors 32mm to 55mm thick.
- Maximum door weight 58kg.

D/STAND/A £45.91



Support for routing hinges & mortises.

Support to assist fitting door to frame or lining.



DOOR CLAMP

Holds door while drilling and fitting locks.

- No set-up time needed.
- No more searching for alternative door stops.
- Padded to prevent door and floor damage.
- For doors up to 55mm thick.

D/CLAMP/A £21.68



DOOR LIFTER

Foot operated lifter to support door while fitting frame into door.

- Slides under door and stays flat and stable until ready to activate the lift with users foot.
- Cam design with internal weight to keep level for ease of use.
- Ideal for pinned hinges.
- Lifts door 38mm (1-1/2") high and supports maximum weight 108kg.
- Hanging hole for storage.

D/LIFT/A £16.77



DOOR & BOARD LIFTER

Allows up, down and side to side movement for easy positioning and fixing of doors, panels and plasterboard.

- Foot operated lifter to support door while fitting into door frame, freeing up the users hands.
- 360 degree rotation.
- Lifts door 60mm (2-3/8") high
- Made from metal with non-marring foot pad.
- Raises up parallel to the floor.
- Ideal for carpenters, plasterers, dry liners and locksmiths.


Standard Max. Weight 75kg (165lbs)

D/LIFT/B £18.48

NEW

Heavy Duty Max. Weight 200kg (440lbs)

D/LIFT/C £34.50

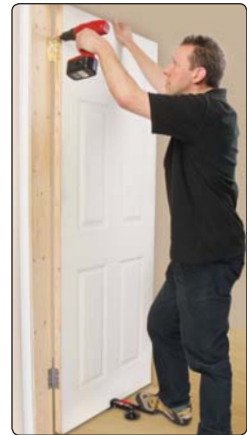

Non-slip surface pad to aid grip when operating by foot or knee.

SWIVEL TYPE

Non-marr pad on jaw face.

Parallel lifting & lowering max. 60mm.

Swivel for easy positioning.

DOOR HANGING JIGS

LOCK JIGS

See pages 166-168 for full details on our Lock Jigs.



Product Ref.

LOCK/JIG
LOCK/JIG/A
LOCK/JIG/B

HINGE JIGS

See pages 162-165 for full details on our Hinge Jigs.



Product Ref.

HINGE/JIG
H/JIG/A
H/JIG/B
H/JIG/C

HINGE FITTING

QUICK CHUCKS

See page 229 for full details on our Quick chucks. Fits into drill to allow quick change tools to be fitted.



Product Ref.
SNAP/QC

DRILL BIT GUIDE

See page 232 for full details of our Drill Bit Guides. Self-centres drill bit in hinge screw holes.



Product Ref.

SNAP/DBG/7 (2.75mmØ drill)
SNAP/DBG/9 (3.5mmØ drill)

SCREWDRIVER BITS

See page 238 for full details on our No. 2 Pozzi® bits and bit holder to fit hinge screws.



Product Ref.

SNAP/IPZ2P/BH

BUTT HINGE TEMPLATE

A routing template that allows a router to create a hinge recess on a door.

- Made from clear 8mm thick plastic.
- Includes metal templates for 75mm and 100mm butt hinges.
- Magnets in template frame to hold templates.
- Cuts rounded corners which can be removed with a corner chisel or chisel.
- Use on doors from 35mm to 44mm thick.
- Requires 12mm diameter cutter and 30mm guide bush.
- User-made batten 44mm x 34mm x 450mm and two F-clamps are required.

TEMP/BH/A £42.62

Size: 214 x 135 x 8mm



COMPATIBILITY
www.trend-uk.com/compatibility



INCLUDES:

- 1 x 75mm Template
- 1 x 100mm Template

OPTIONAL ACCESSORIES:

	Product Ref.	Price
Recommended 1/4" shank cutters		
Professional 12mmØ router cutter	3/8LX1/4TC	£27.73
Trade Range 12mmØ router cutter	TR12X1/4TC	£24.83
CraftPro 12mmØ router cutter	C019AX1/4TC	£18.53
Recommended 30mm guide bush		
(A Unibase may be required)	GB30	£8.36
Extra templates		
3" template	WP-BH/T/3	£8.36
4" template	WP-BH/T/4	£8.36

LOCK RECESS TEMPLATE

Clear plastic template for use with any plunge router to accurately fit 2, 3 and 5 lever sash and dead mortise locks.

- Clear plastic with magnets to hold metal templates.
- Includes six faceplate recess and three mortise templates.
- Requires 12mm diameter x 63mm cut length cutter with 1/2" shank and 30mm guide bush. A 1/4" shank extra long cutter can also be used but deepening of mortise with auger bit will be required.
- User-made batten 44mm x 34mm x 450mm and two F-clamps are required.

TEMP/LR/A £56.67

Size: 320 x 135 x 8mm



COMPATIBILITY
www.trend-uk.com/compatibility

TEMPLATES INCLUDED:

Faceplate Dimensions:		
Imperial	Metric	Template
7/8" x 6-1/8"	22.2 x 156mm	1
7/8" x 6"	22.5 x 152.5mm	2
1" x 5-1/4"	25.4 x 133.5mm	5
1" x 6"	25.4 x 153mm	7
1" x 6-3/8"	25.6 x 162mm	12
-	25.1 x 57mm	15

Mortise Dimensions:		
Imperial	Metric	Template
5/8" x 4-1/4"	16 x 107mm*	B
3/4" x 3"	19 x 79mm*	C
5/8" x 3-17/32"	16 x 90mm*	E

* These are maximum mortise lock case (body) lengths, unless radius ends are squared with a chisel. Actual length of mortise is 7mm longer. Smaller mortise locks can be accommodated depending on position of their fixing screws.

OPTIONAL ACCESSORIES:

	Product Ref.	Price
Recommended 1/2" shank cutters		
Professional 12mmØ router cutter	3/75X1/2TC	£41.41
Trade Range 12mmØ router cutter	TR37X1/2TC	£33.76
CraftPro 12mmØ router cutter	C172X1/2TC	£23.60
63mm cut length.		
Recommended 1/4" shank cutters		
Professional 12mmØ router cutter	3/8LX1/4TC	£27.73
Trade 12mmØ router cutter	TR12X1/4TC	£24.83
CraftPro 12mmØ router cutter	C019AX1/4TC	£18.53
70mm overall length. Deepening of mortise with auger bit required.		
Recommended 30mm guide bush		
(A Unibase may be required)	GB30	£8.36

SUITABLE FOR FOLLOWING LOCKS:

Additions H32306, H32331, Chubb 3U75, 3G114, ERA 196-62, 201-31, 201-32, 202-32, 208-31, 221-31, 301-32T, 302-32T, 467-32T, 471-32T, 571-32T, latch, **ES** bed latch, **Jewson** LISJK072, LISJK100, **Legge** P3751, P1645, **Travis Perkins** P19, P20, P22 (802503), P29 (802510), P81, **Union** L99, Y2201, Y2294, **Yale** PM246, PM320 and PM550.