

CONTRACTOR HINGE JIG

Contractor hinge jig with adjustable apertures to recess hinges in wooden doors and frames. Constructed from aluminium extrusion, it is easy to use with minimal setting-up time, completing the job both accurately and quickly. Single piece and two piece available.

- Use on-site and in joinery shops to increase productivity with excellent results.
- Four apertures for fire door requirements.
- No need for marking out in the conventional way.
- Quick and simple to set-up as the hinge is used as the pattern.
- Clean and accurate recesses are achieved every time.
- Suitable for timber based doors and square butt hinges.
- Use with a light duty router with 1/4" collet.
- Long reach router cutter required, 12mm diameter with 70mm overall length.
- Angled position slots to prevent edge guide creep.
- Jig thickness allows it to be used on frames with a maximum 25mm thick fixed stop fitted.

HINGE/JIG (single piece) £263.10
H/JIG/A (two piece) £267.35



HOW IT WORKS:

Setting the length using hinge as a pattern.



Setting the width



Setting the depth




Routing hinge recesses



Fitting the door



TECHNICAL DIAGRAM:

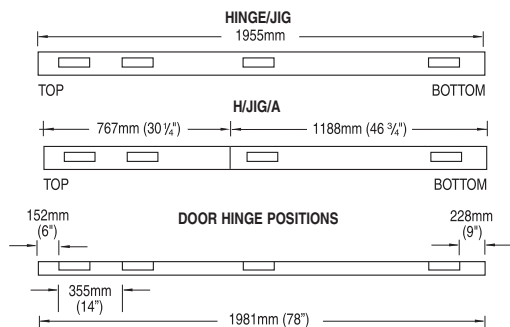

trend-uk.com/video



COMPATIBILITY
www.trend-uk.com/compatibility

FEATURES:

- With adjustable apertures.
- Fully adjustable bottom hinge recess.
- Can be used on max. 25mm thick fixed stops.
- Also suitable for fire doors.

INCLUDES:

- 4 x Apertures
- 2 x Bradawls with spacer
- 1 x 16mm guide bush
- 1 x T-handle hex key
- 1 x 4mm spacing gauge
- 1 x Plastic storage tube with HINGE/JIG
- 1 x Fabric storage case with H/JIG/A

SPECIFICATION:

Hinge sizes possible	
Length min.	2-5/8" (67mm)
Length max.	5" (127mm)
Width min.	3/8" (9.5mm)
Width max.	1-3/8" (35mm)
Door sizes possible	
Height min.	6' 5" (1955mm)
Height max.	6' 10" (2100mm)*
Thickness min.	5/8" (16mm)
Thickness max.	2" (51mm)

* Please note for doors over 2040mm the bottom hinge will be higher than 9" up.

REPLACEMENT PARTS:

	Product Ref.	Price
1. Special guide bush (dia. 16mm x 10mm)	GB160	£11.92
2. Bradawl (requires spacer)	WP-HJ/09	£5.47
3. Nylon spacer for bradawl (1 off)	WP-HJ/08	£1.84
4. 4mm feeler gauge (1 off)	WP-HJ/10	£3.17
5. Aperture block (1 off)	WP-HJ/02	£7.28
6. T-handle hex key (1 off)	WP-AKT/01	£6.36
7. Plastic storage tube (for HINGE/JIG)	CASE/HJ	£19.46
8. Fabric carry case (for H/JIG/A)	CASE/HJ/A	£22.23



ROUTING TIP

RADIUSED HINGES

For 10mm radius hinge solutions, use Trade router cutter Ref. TR20DX1/4TC & guide bush Ref. GB240.

