

SEALEY

ADBLUE® FUNNELS

MODEL NO: **ADB07A, ADB07S**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear eye protection



Wear protective gloves



Wear protective clothing

1. SAFETY

- ❑ **WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- ✓ Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- ✓ Maintain the funnel in good condition.
- ✓ Funnel is specifically designed for AdBlue (diesel engine fuel additive).
- ✓ Ensure safety eye protection and protective clothing are worn when using this product.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Maintain correct balance and footing. Ensure the floor is not uneven.
- ✓ Keep children and unauthorised persons away from the working area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- ✗ **DO NOT** dismantle, tamper with or adapt the funnel for any purpose other than for which it is designed.
- ✗ **DO NOT** use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- ✓ Keep the funnel clean and store in a safe dry, childproof location.
- ❑ **WARNING! DO NOT** allow uncontrolled discharge of fluids thus polluting the environment.

2. INTRODUCTION

Specially designed AdBlue® funnels screw directly onto filler neck alleviating risk of spills. Units are fitted with a manual internal valve which, when opened, allows fluid to pass through. Large capacity of 1.1L and fitted with a click close lid to keep dirt and debris out when not in use. Available in both straight and angled configurations depending on position of AdBlue® filler neck on vehicle.


3. SPECIFICATION

MODEL NO:	ADB07A	ADB07S
Diameter:	95mm	95mm
Spout Type:	Angled	Straight

4. OPERATION

Note: Depending on the location of the AdBlue® filler port the funnel can either be filled whilst attached to the vehicle or at a more convenient location and then attached.

- 4.1. Screw the funnel onto the AdBlue® filler cap.
- 4.2. Fill the funnel to the desired level using the graduated scale.
- 4.3. Release the internal plunger valve.
- 4.4. When the reservoir is full close off internal valve to stop flow.
- 4.5. Unscrew funnel from filler cap and dispense of unused AdBlue® into suitable container.
- 4.6. Clean funnel with water

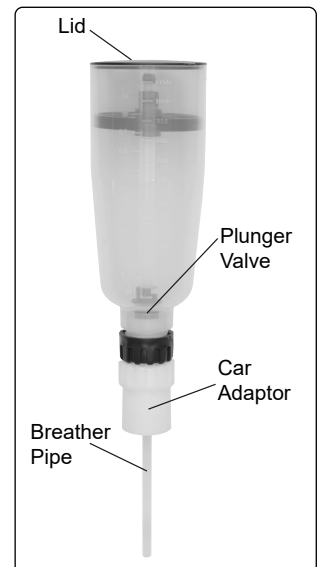

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk