

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

### 1. SAFETY INSTRUCTIONS

- ✓ **ONLY USE THE SUPPLIED ADAPTOR FOR CONNECTING TO A 12V VEHICLE CIGARETTE SOCKET.**
- ✓ This lantern is designed for intermittent use only and not for long periods. *Continual use will drain the vehicle battery.*
- ☐ **WARNING!** The lens becomes very hot during operation.
- ✗ DO NOT cover or block the lens during use.
- ✗ DO NOT shine directly into yours, other persons or animals eyes.
- ✗ DO NOT stand the lantern near any surface or item that may be adversely effected by the heat generated from the lens.
- ✗ DO NOT allow children to use the lantern.
- ✓ Ensure correct rated bulb is used for replacement.
- ✓ When not in use store the lantern in a safe, dry, childproof location.

### 2. INTRODUCTION & OPERATION

#### 2.1. INTRODUCTION



The AK434 is a powerful, weather proof spotlight, providing a clean white beam which can be seen for miles. The unit is operated by plugging into a 12 Volt vehicle cigarette lighter socket by using the supplied adaptor.

#### 2.2. OPERATING

- ☐ **WARNING!** Ensure you read, understand and apply safety instructions. Reminder: This lantern is designed for intermittent use only. **NOTE:** *Continual use will drain the vehicle battery.*
  1. Ensure the vehicle battery has sufficient charge and check that the lantern is turned OFF before connecting adaptor. .
  2. Plug the 12Volt vehicle plug adaptor into the jack inlet on the lantern body (3).
  3. Plug other end of adaptor into the vehicle cigarette lighter socket.
  4. Turn lantern ON and OFF by the switch on the main body (fig 1.S).
  5. To use as shown in figure 1, press locking button (fig 1.1), release and turn handle (2) to grip.
  6. The lower lantern profile (figure 2) may be used to concentrate the beam of light. If lantern is set as figure 1, reverse procedure 2.2.5.

#### 2.3. CHANGING THE LAMP BULB

1. Undo the lantern hood (fig 1.H) by turning it anti-clockwise, carefully remove the hood.
2. Unscrew bulb retaining collar (fig 3.C) anti-clockwise and carefully remove.
3. Remove the old bulb (B) and replace with a new one.
4. Replace the collar and screw clockwise locking the bulb in place.
5. Reassemble the lantern hood.

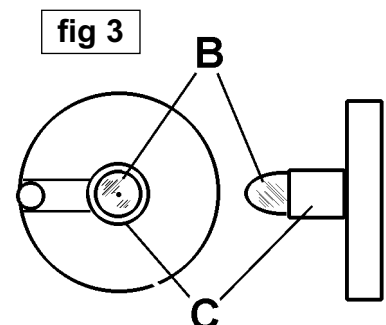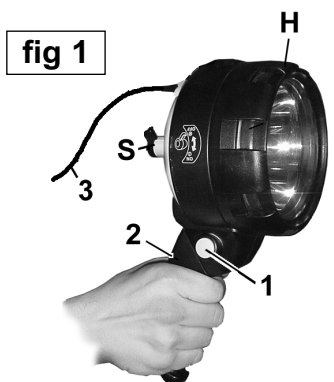

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

