

GEARLESS COMBINATION WRENCH SETS

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

When using the ratchet rings remember the following:

The gearless ratcheting mechanism is designed to offer rapid tightening of a fastener in a confined space. However the mechanism can be damaged by excessive torque and if necessary the final tightening should be done with the open jawed end of the spanner.


DO NOT exceed the torque figures shown in the table below.

DO NOT strike the shaft of the spanner with a hammer to tighten fastener.

DO NOT increase leverage by placing a length of pipe over the spanner.

DO NOT use the spanner as a crowbar.

Spanner size Metric (mm) SAE (ins)	10	11	12	13	14	15	16	17	18	19	
	3/8	7/16		1/2	9/16		5/8	11/16		3/4	
Max torque on ratchet ring	Nm	28.5	33.2	40.0	47.4	56.9	63.6	71.2	73.1	74.0	75.9
	lb.ft	21.0	24.5	29.5	35.0	42.0	46.9	52.5	53.9	54.6	56.0

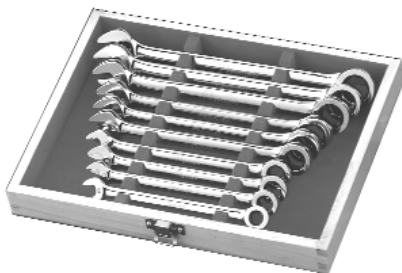

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this equipment.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

