

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY PRECAUTIONS

1.1. GENERAL SAFETY INSTRUCTIONS.


- X **DO NOT** open more than one drawer at a time.
- X **DO NOT** step on the drawers.
- X **DO NOT** let children near the rollcab.
- ✓ Ensure drawers are fully closed before moving the rollcab.
- ✓ Secure brakes when rollcab is in the desired position.
- ✓ Only use on a firm, level surface.
- ✓ This item is heavy, assembly requires two people.

2. INTRODUCTION AND SPECIFICATIONS

Premier Ball Bearing range of rollcabs and topchests for the professional, units supplied as complete stacks only.


- Two sizes, 36" 10 drawer and 42" 19 drawer combined rollcab and topchest.
- Heavy gauge steel with double wall construction for extra strength and durability.
- Ball bearing drawer runners provide superior performance and carry heavier loads.
- Each drawer fitted with drawer liners and full length aluminium handle with centre hand grip for ease of opening and closing.
- Added security provided by cylinder locks, supplied with two keys.
- Topchest lids are fitted with gas dampers for ease of opening and preventing accidental closure.
- Rust and solvent resistant powder coat paint finish.
- Each rollcab includes two Ø125mm swivel castors with large toe locks and two fixed wheels.

Components requiring assembly.

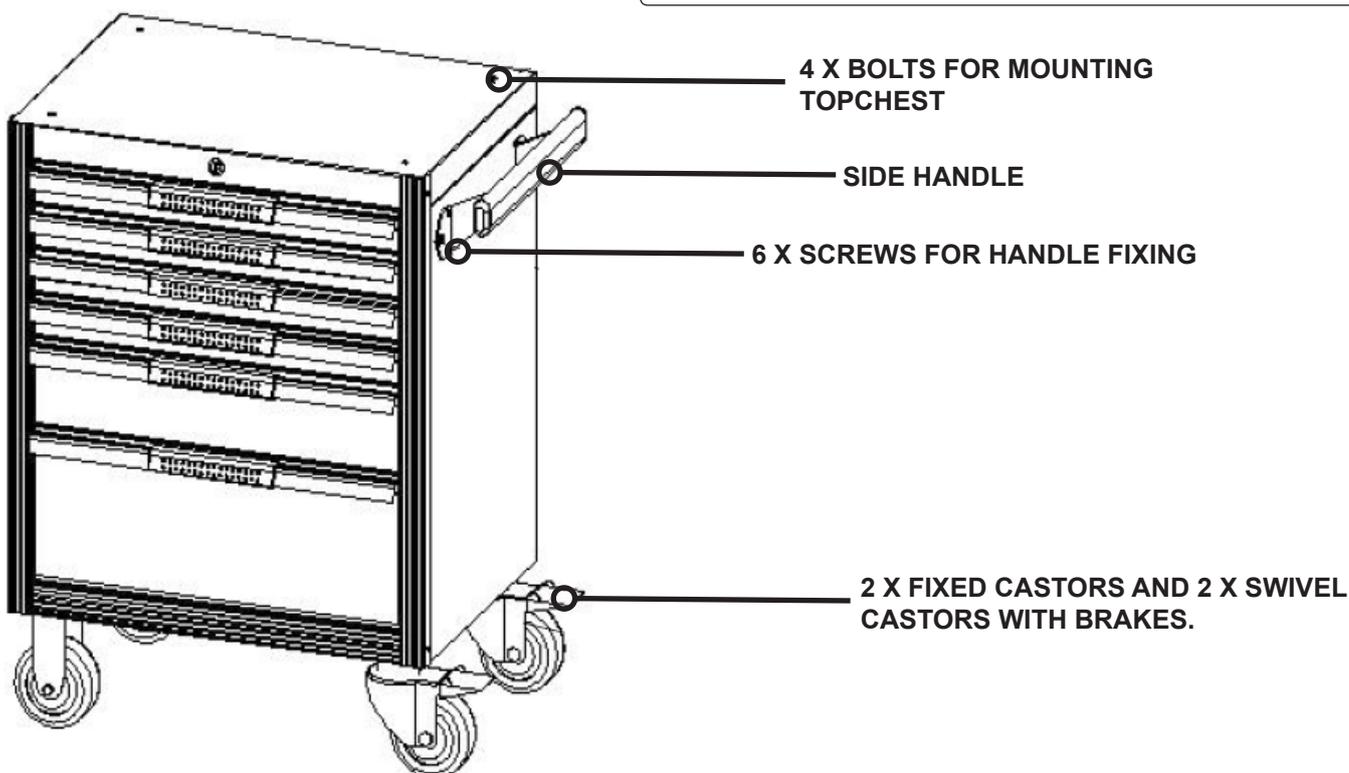


3. ASSEMBLY


3.1 Open the packaging and remove the keys, open the drawers and remove the accessories.
Assemble the castors as fig.1, ensure both the swivel castors with brakes are fitted to the same end of the cabinet as fig.1 to prevent tipping.

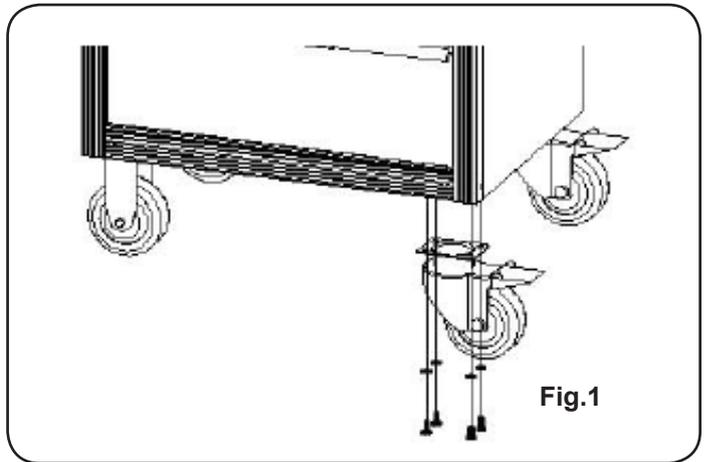

3.2 Fasten the handle with the screws provided as fig.2.

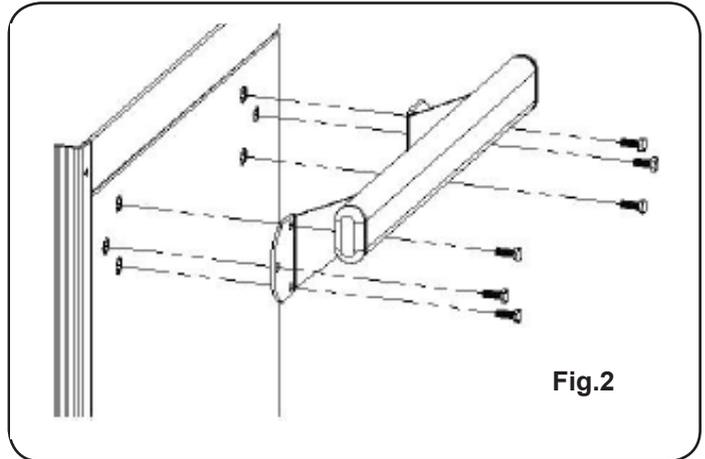

3.3 Align the top chest with the 4 x flanges (fig.3), remove the two lower drawers from the topchest to provide access and using the bolts supplied fix the top chest to the cabinet.
(To remove a drawer, pull the drawer completely out, press down the right tab and lift up the left tab on the side runners, pull drawer off the slides. To reinstall the drawer, realign with the internal drawer slide and push until it locks in place).

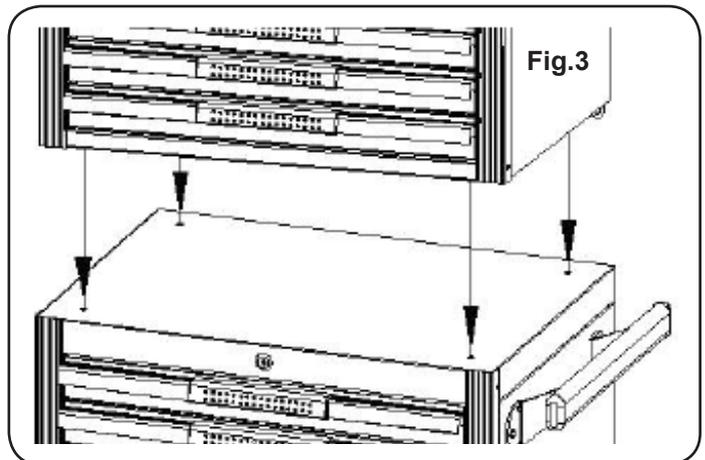

MAINTENANCE: Periodically lubricate castors and tighten all nuts/bolts.

IMPORTANT: To avoid tipping, open one drawer at a time and close and secure all drawers when moving.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
Kempson Way, Suffolk Business Park,
Bury St. Edmunds, Suffolk,
IP32 7AR

01284 757500

01284 703534



www.sealey.co.uk



sales@sealey.co.uk