

5 LEVEL RACKING UNIT 200KG CAPACITY PER LEVEL

MODEL NO: **AP7200.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY, KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions

1. SAFETY

- WARNING! Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this racking unit.
- ✓ Locate racking unit in a suitable work area.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- WARNING! Use racking unit on level and solid ground, preferably concrete. For added safety fix unit to a wall.
- ✓ Keep the racking unit clean and tidy in accordance with good workshop practice.
- ✓ Keep children and unauthorised persons away from the work area.
- **DO NOT** use the racking unit for any purpose other than that for which it is designed.
- **DO NOT** use the racking unit outdoors.
- DO NOT place the racking unit in a damp or wet location or an area where there is condensation.
- DO NOT clean the racking unit with any solvents which may damage the surfaces or the protective coating.
- **DO NOT** move the racking unit when there are items placed on it.
- DO NOT overload the racking unit.

2. INTRODUCTION

Fully painted steel frame with five MDF shelves. 200kg capacity per level giving a maximum capacity of 1000kg per rack. Bolt-less design means no tools required to assemble. Two piece uprights allow use as a single bay rack or split into two separate shelf systems or workstations. Ideal for use in conjunction with Model No. AP7150C corner racking unit.


Dimensions W x D x H: 900 x 400 x 1830mm

3. CONTENTS

- 3.1. Unpack the unit and confirm that all the parts listed below are present. Refer to Parts List below.
- 3.2. Assemble the unit on a solid, level surface. Avoid carpet. A second person will be required to help with assembly.


4. ASSEMBLY

- **4.1.** Assemble the racking unit in the sequence below, referencing the parts list overleaf.
- **4.2.** Use a rubber mallet to tap the brackets together.





Allow one keyhole free between the foot cap and the shelving bracket.

Place foot end caps onto the bottom of the 4 legs 'D'. Note upright position. Place shelving bracket 'A' onto the legs 'D'. A rubber mallet can be used to lightly tap all brackets into the keyholes of the legs into place. Allow one keyhole free between the foot end cap and the shelving bracket.





Use shelf bracket 'B' for the side brackets using the shelf bracket from Step 1 as a guide for height. Allow 1 keyhole free from the ground as shown in the diagram. Use same shelving brackets for opposing sides as shown in the diagram. Place brace 'C' as shown.

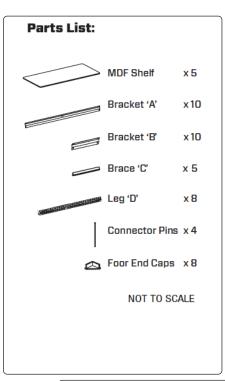




Place MDF board on bottom shelf to minimise buckling. Join the upper legs to the lower legs with the connector pins. Note upright position. Note: The legs are designed to sit directly on top of each other – don't overlap them. Handy Hint: Flathead screwdriver may be used to tap in connector pins.

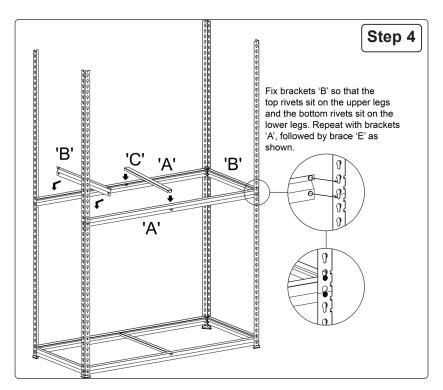




Fix brackets 'B' at the very top allowing room for the MDF board to sit flush against the legs. Repeat with brackets 'A'.



Apply remaining brackets as above to desired height. Ensure that braces 'C' are fixed to all shelves



Place the MDF boards on shelves, ensure they are sitting flush against the edge of the shelf brackets

Parts support is available for this product. Please email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR

1 01284 757500 01284 703534 sales@sealey.co.uk www.sealey.co.uk