



TRACK PUMP WITH DIGITAL GAUGE, BICYCLE PUMP, 8BAR, 180PSI, AUTO-SHUT-OFF

MODEL NO: **BC115D**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Battery in product

BATTERY WARNING

KEEP OUT OF REACH OF CHILDREN
Swallowing can lead to chemical burns, perforating of soft tissue, and death. Severe burns can occur within 2 hours of ingestion. Seek medical attention immediately.



1. SAFETY

- ✓ Read operating instructions before use.
- ✓ Check capacity and maximum inflation pressure of inflatable before commencing inflation.
- ✓ Monitor the pressure gauge while in operation. The gauge should be used as an indication of pressure only. We recommend the use of a dial pressure gauge for definitive reading.
- ❑ **WARNING! DO NOT** inflate any item beyond its maximum capacity.
- ✗ **DO NOT** carry by the hose, or yank the hose from an inflation valve.
- ✗ **DO NOT** use the pump for a task it was not designed to perform.
- ✗ **DO NOT** operate the pump when you are tired, under the influence of alcohol, drugs or intoxicating medication.
- ✗ **DO NOT** operate the pump if any parts are missing as this may cause failure or possible personal injury.
- ✓ Keep children and non essential persons away from the inflation area.
- ✓ Keep the pump clean and in good condition.
- ✓ Replace or repair damaged parts.

2. INTRODUCTION

Durable construction with chrome plated steel upright tube. Digital gauge calibrated in psi, kPa and bar with ranges from 0-120psi and 0-8bar. Fitted with twin head for both Presta and Schrader valves and a 360° rotatable hose. Features a wide base for added stability. Auto-shut-off after 30 seconds. Supplied with accessories for inflating items such as small inflatable boats, air beds and balls stored in a compartment located in the handle.

3. SPECIFICATION

Model No:	BC115D
Accuracy:	±0.8%
Battery Run Time:	Continuous working time: 20 hours
Battery:	CR2032 (Supplied)
Maximum Pressure Output:	120psi
Nett Weight:	0.89kg
Pressure Units:	Psi, bar, kPa
Range:	0-8 bar (0-120psi)

4. OPERATION

- 4.1. Remove all packaging.
- 4.2. Select Presta or Schrader valve connection.
- 4.3. Unscrew the valve cap.
- 4.4. Place the pump head onto the tube valve, lift the lever up to the locked position (Fig.2).
- 4.5. Use On/Off button (Fig.3) to turn on digital gauge. Use On/Off button to select the display unit (psi, bar, kPa).
- 4.6. Place feet on to base, grasp handles. Raise and lower handles to pump air into item to be inflated.
- 4.7. Inflate tyre to desired pressure.
- 4.8. Lower lever to unlocked position to release pump head (Figure 2).
- 4.9. Fasten the tube valve cap.
- 4.10. CHANGING THE BATTERY**
- 4.10.1. Slide the battery tray out to change the battery. Make sure you insert the battery the correct way up see fig.4 for reference.



fig.1


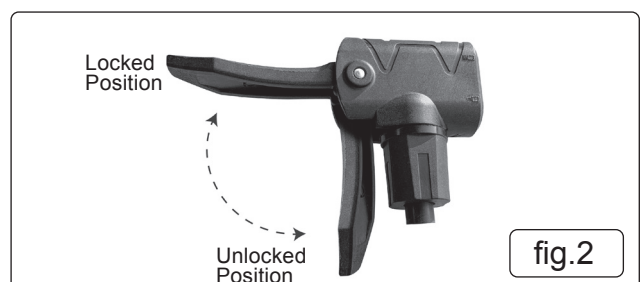


fig.2

5. MAINTENANCE

- 5.1. Keep tyre pump clean and check for damage before every use. If damage is observed, remove from use until unit is repaired.
- 5.2. Keep the tyre pump clean by wiping with a damp cloth.
 - × **DO NOT** allow water ingress into the tyre pump.
 - × **DO NOT** use solvents to clean tyre pump.
- 5.3. Store tyre pump in a dry childproof area.
- 5.4. **LIFE TIME OF THE MACHINE/DISPOSAL**
 - 5.4.1. Through years of normal wear, the tyre pump will eventually become unserviceable. When this happens ensure that it is disposed of in accordance with local authority regulations.

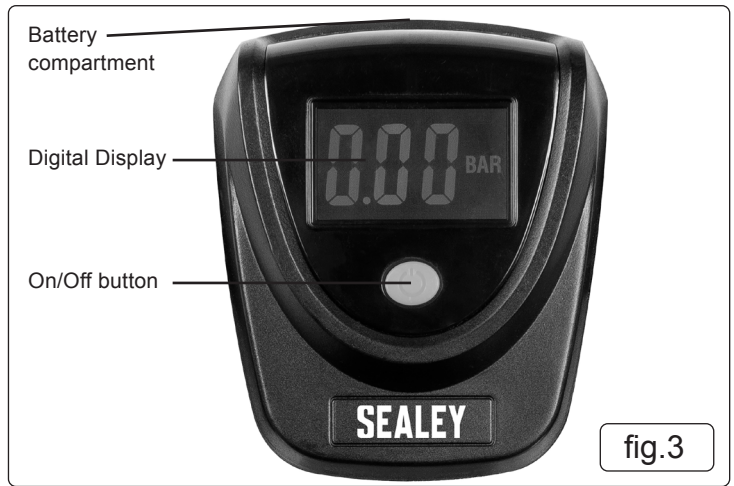

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE



BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk