



INSTRUCTIONS FOR

## 12-24V ANTI-THEFT BATTERY TERMINAL AND FUSE HOLDER

MODEL NO: **BTANT1224V**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to  
instruction  
manual



Wear eye  
Protection



Warning:  
Explosive  
Material



Warning:  
Corrosive  
substance

### 1. SAFETY

#### 1.1. PERSONAL PRECAUTIONS

- ✓ Ensure that there is another person within hearing range and close enough to come to your aid, should a problem arise when working near a lead-acid battery.
- ✓ Wear safety eye protection and protective clothing. Avoid touching eyes while working near battery.
- ✓ Have fresh water and soap nearby in case battery acid contacts skin, clothing, or eyes.
- ✓ Wash immediately with soap and water if battery acid contacts skin or clothing. If acid enters eye, flush eye immediately with cool, clean running water for at least 15 minutes and seek immediate medical attention.
- ✓ Remove personal metallic items such as rings, bracelets, necklaces and watches. A lead-acid battery can produce a short-circuit current which is high enough to weld such items to the vehicle and cause severe burns.
- ✓ Ensure that hands, clothing (especially belts) are clear of fan blades and other moving or hot parts of engine. Remove ties and contain long hair.
- ✗ **DO NOT** smoke or allow a spark or flame in the vicinity of the battery or engine.

#### 1.2. GENERAL SAFETY INSTRUCTIONS

- ✓ Familiarise yourself with the application, limitations and potential hazards of the product. Also refer to the vehicle manufacturer's hand book. IF IN ANY DOUBT CONSULT A QUALIFIED ELECTRICIAN.
- ✓ Keep tools and other items away from the engine and ensure that you can see the battery and working parts of engine clearly.
- ✓ If the battery terminals are corroded or dirty, clean them before fitting the product.
- ✓ Keep children and unauthorised persons away from the work area.
- ☐ **WARNING!** To prevent the risk of sparking, short circuit and possible explosion **DO NOT** drop metal tools in the battery area, or allow them to touch the battery terminals.
- ✓ Ensure there is effective ventilation to prevent a build-up of explosive gases.

### 2. INTRODUCTION

Battery isolator switch. Fused bypass that maintains computer settings, radio and clock, while the battery is disconnected. Fits both 12V & 24V batteries.

### 3. SPECIFICATION

Model No:.....**BTANT1224V**  
Continuous rate:..... 125A  
Crank rate: .....500A  
Voltage:..... 12V-24V  
Cable size: .....4-6AWG


### 4. INSTALLATION

**Refer to fig.1**

- 4.1. Disconnect negative then positive battery lead.
- 4.2. Fit one end of the fused bypass link to the Anti-theft terminal clamp bolt. Fit the other end to the vehicle's original clamp bolt.
- 4.3. Unscrew green knob anticlockwise and remove.
- 4.4. Connect the vehicle's Positive battery lead and tighten clamp.
- 4.5. Fit the vehicle's Negative battery lead with the Anti-theft terminal and tighten clamp. Screw green knob clockwise back into Anti-theft terminal.
- 4.6. The fused link will maintain computer settings, radio, clock etc. whilst the battery is disconnected.

## 5. OPERATION

- 5.1. Unscrew the knob anticlockwise a few turns to disconnect the battery.
- 5.2. Reconnect the battery by tightening the knob clockwise.
- 5.3. The knob can be removed completely to deter theft.

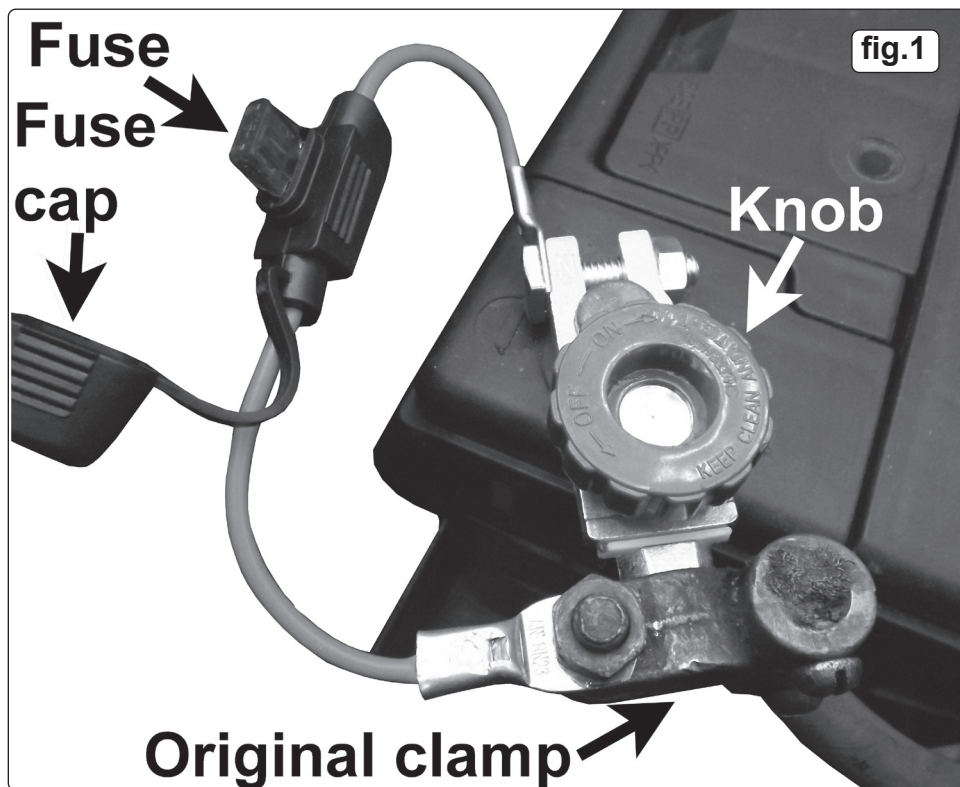

### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR  
PURCHASE HERE

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No Liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

**Jack Sealey Ltd t/a Sealey Group**, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK

**Jack Sealey (EU) Ltd t/a Sealey Group**, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland

**Tel:** 01284 757500 • **Email:** sales@sealey.co.uk • **Web:** www.sealey.co.uk