



INSTRUCTIONS FOR:

BENCH MOUNTED SHEET METAL BENDER

Model No: **DF760**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

Bench mounted sheet metal folder, fitted with mounted plates. Capable of bending up to 22 gauge steel sheet. Ideal for the small garage or restoration operation.

Maximum sheet size:	760mm
Maximum sheet thickness:	22gauge
Maximum bending angle:	90 degrees
Length of unit:	800mm
Width of unit:	150mm
Height of unit:	73mm

1. SAFETY INSTRUCTIONS

- ✓ Wear approved safety goggles when operating the DF760. Your local Sealey dealer offers a complete range of safety equipment.
- ✓ Use the tool only for its intended purpose.
- ✓ Check all items of the DF760 regularly for damaged parts. Do not use if any of its components are broken, worn or damaged.
- ✓ Use original Sealey spare parts and accessories. Use of non-recommended spare parts may be dangerous and will invalidate warranty.
- ✗ DO NOT operate this tool while tired, under the influence of drugs, alcohol or other impairing medication.
- ✗ DO NOT allow unqualified persons to operate the metal folder. Keep children away from the tool.

2. ASSEMBLY

Unpack the unit and check that all parts are included and not damaged. Should you experience a problem contact your supplier immediately.

Note: Numbers in brackets with “#” symbol refers to item numbers on the parts diagram.


- 2.1. The stand (#1) should be secured to a work bench using the mounting holes and 4 bolts (3/8” diameter).
- 2.2. Each handle ball (#7) should be attached to the handle lever (#6) and the handle levers should be placed into the pins (#5).

3. OPERATION

- 3.1. To use the bender, lower the handle lever until the moving plate is parallel to the work bench. Position the material to be bent on the supporting plate (#2) and the moving plate and properly align with the edge to be bent up against the back edge of the supporting plate.
- 3.2. Place and secure the pressing plate (#3) on top of the supporting plate with the back edge of pressing plate aligned with back edge of supporting plate. Suitable clamps (not included) are required to secure the pressing plate. For a full range of clamps see your authorised Sealey dealer.
- 3.3. Raise the two handle levers to bend the material to the desired angle.
- 3.4. When the folder is not in use, it should be covered and stored in a dry location.

4. PARTS

Item	Part No.	Description
1	DF760.01	Stand
2	DF760.02	Supporting plate
3	DF760.03	Pressing plate
4	DF760.04	Moving plate
5	DF760.05	Pin
6	DF760.06	Handle lever
7	DF760.07	Handle ball

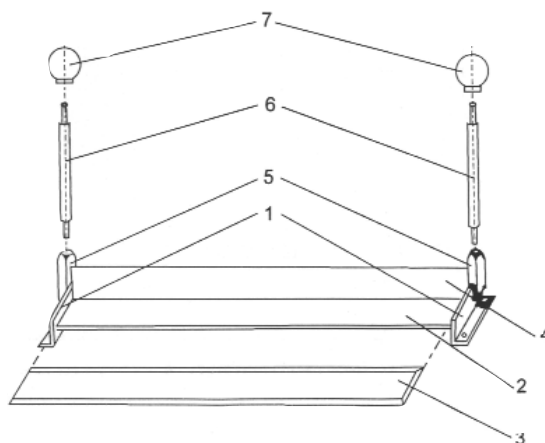

MODIFICATIONS: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No responsibility is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date. Proof of purchase will be required for any claim.

INFORMATION: Please call us for a copy of our latest catalogue



Sealey Group,
Bury St. Edmunds,
Suffolk.

01284 757500

01284 703534

sales@sealey.co.uk

www.sealey.co.uk