


baridi

Pivot Shower Door 800 x 1850mm, 6mm Tempered Glass, Reversible - Chrome/Black

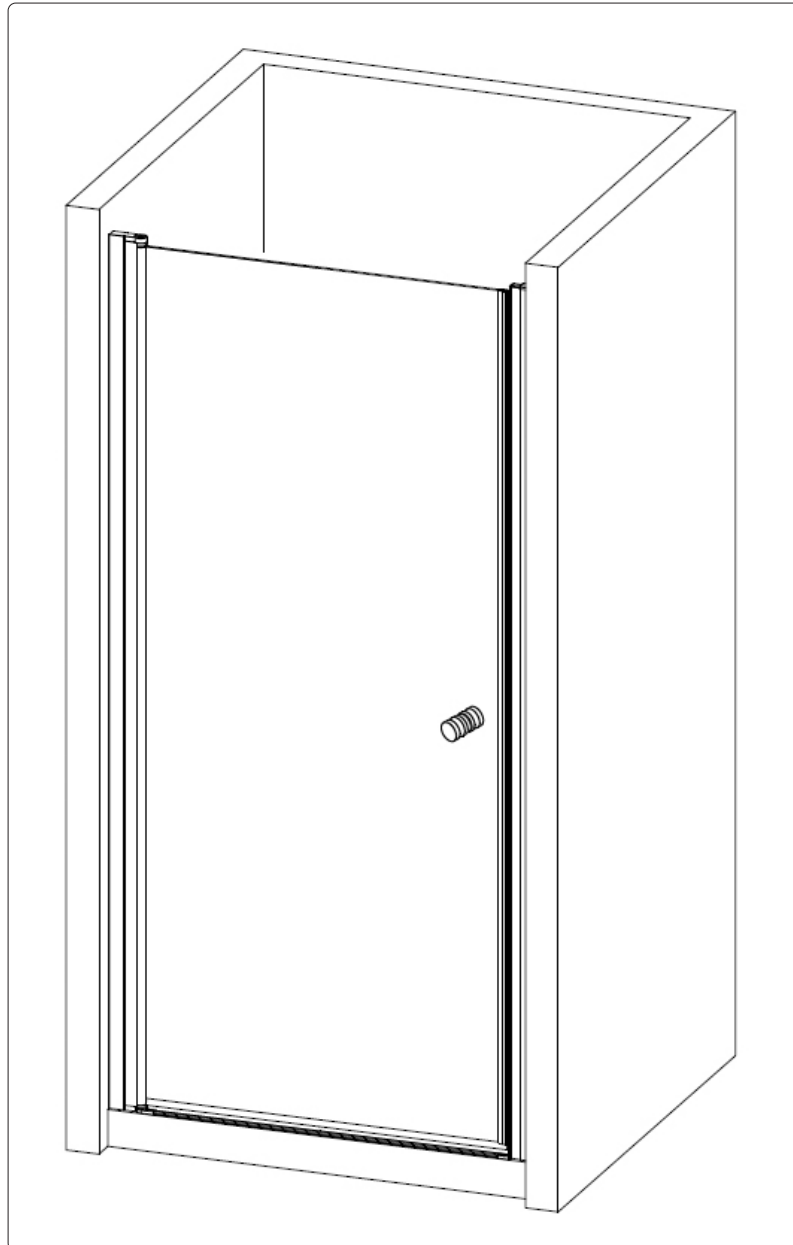

Model No. DH303, DH304


Thank you for purchasing a Dellonda product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.


Important Information

Please read these instructions carefully and note any safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.

Contents

Please check all components shown in the component checklist. If any components are missing or damaged. Contact your point of purchase for replacement.

NO.	Description	QTY	Diagram	NO.	Description	QTY	Diagram
1	Wall jamb	1		14	Water retaining aluminium strip	1	
2	Wall anchor	8		15	Water retaining block	1	
3	Metric Screw(3.9x30)	8		16	Water retaining rubber strip	1	
4	Screw cover cap	6		17	Handle	1	
5	Metric Screw(3.9x10)	6		18	Vertical aluminum material	1	
6	Glass	1		19	Spindle seat	1	
7	Magnetic adhesive strip	1		20	Metric Screw(3.5x25)	2	
8	Magnetic adhesive strip	1		21	Metric Screw(3.5x25)	2	
9	Decorative cover	1		22	Metric Screw(3.5x20)	4	
10	Decorative cover	1		23	Lower shaft core	1	
11	Wall jamb	1		24	Decoration	1	
12	Wall jamb	1					
13	Water retaining block	1					

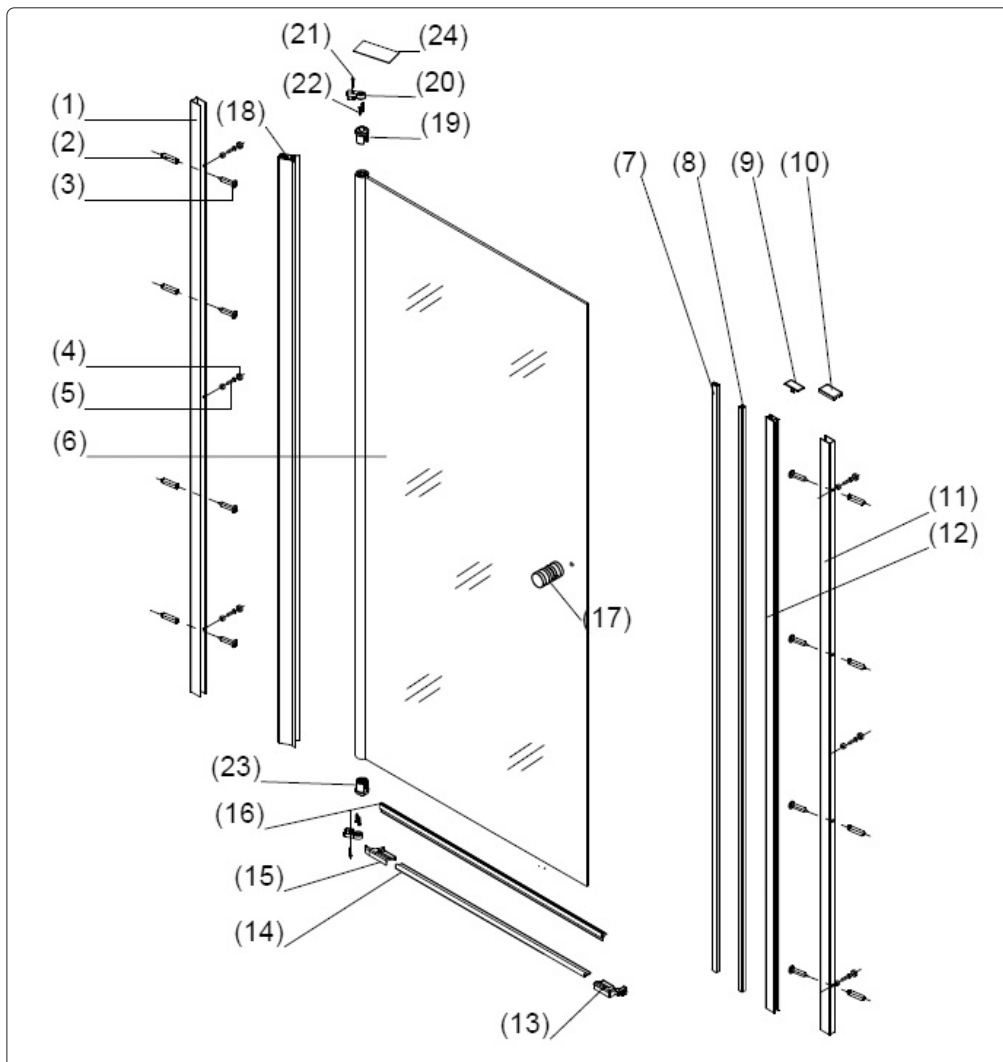

Specification

Model No:	DH303	DH304
Colour:	Glass / Chrome	Glass / Black
Glass Thickness:	6mm	6mm
Material:	Aluminium Profile with Chrome Finish	Aluminium Profile with Chrome Finish
Nett Weight:	23kg	23kg
Product Dimensions (W x D x H):	80 x 0.6 x 185cm	80 x 0.6 x 185cm
Minimum Installation Width (W x H):	76 x 185cm	76 x 185cm
Maximum Installation Width (W x H):	80 x 185cm	80 x 185cm

Safety


- Handle Glass with Care Tempered glass is strong but can shatter if mishandled. Never set it directly on hard surfaces or strike the edges with tools.
- Inspect Before Installation Check all parts for damage before starting. Damaged glass or components can pose serious risks.
- Use Proper Tools and Gear Always wear safety glasses when drilling or cutting. Use a spirit level, silicone gun, rubber mallet, and appropriate drill bits.
- Avoid Rushing the Sealant Allow silicone sealant to cure for at least 24–48 hours before using the shower to prevent leaks and ensure stability.
- Two-Person Job Pivot doors are heavy and awkward to manoeuvre alone. Enlist help to avoid injury and ensure proper alignment.

Mistakes to Avoid


- **INCORRECT TRAY LEVELLING:** If the shower tray isn't perfectly level, the door may not close properly or seal correctly.
- **SKIPPING WALL CHECKS:** Ensure walls are plumb and free of loose tiles or cracks. Uneven surfaces can compromise the door's function.
- **DO NOT** apply silicone inside the enclosure. Only seal external joints to prevent mould and mildew build-up.
- To preserve surfaces and ensure safety, avoid harsh or abrasive cleaners. Opt instead for gentle soap and water, which clean effectively without damaging finishes.

Assembly


Step 1

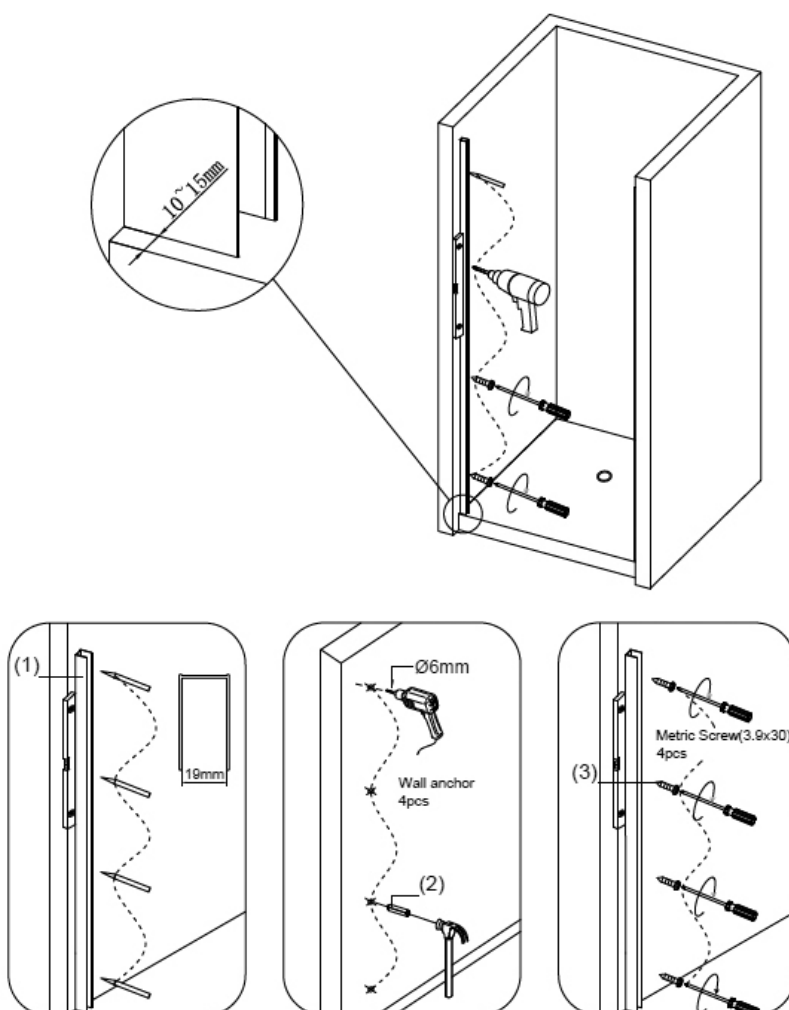


Step 2

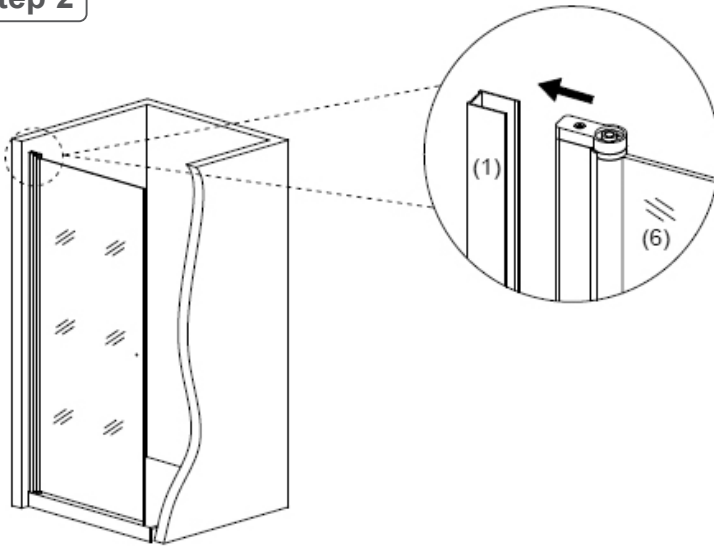


Step 3

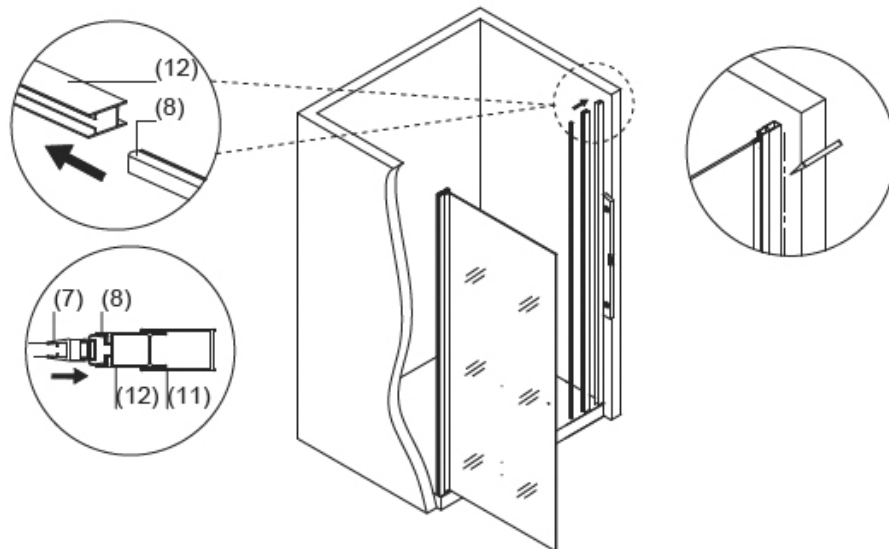


Step 4

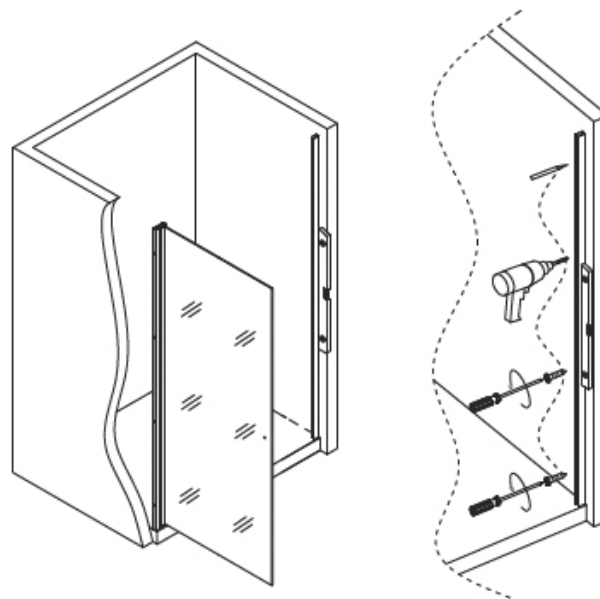


Step 5

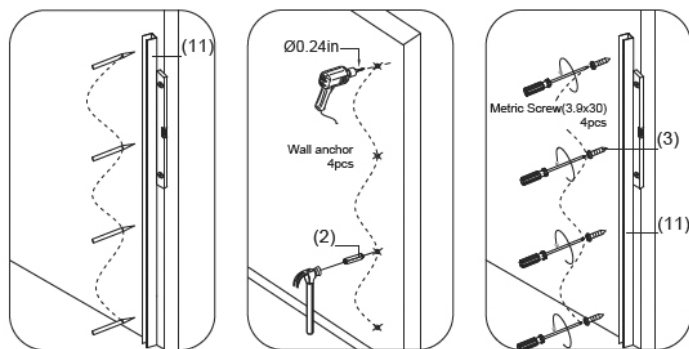


Step 6

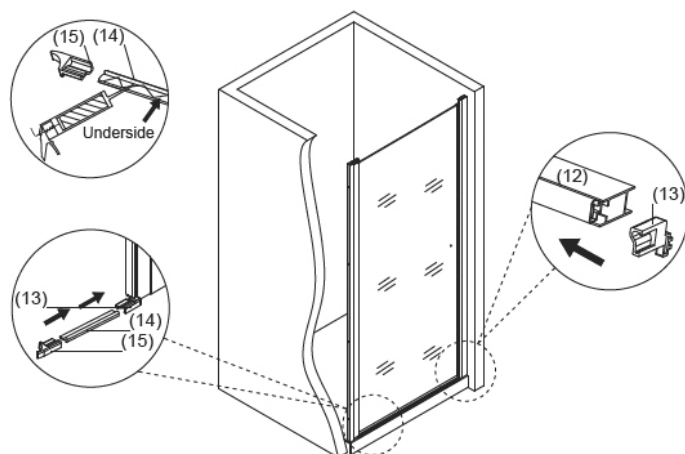

Step 7

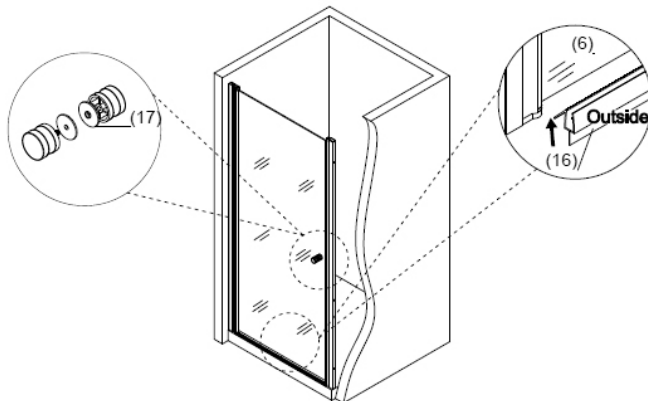


Step 8

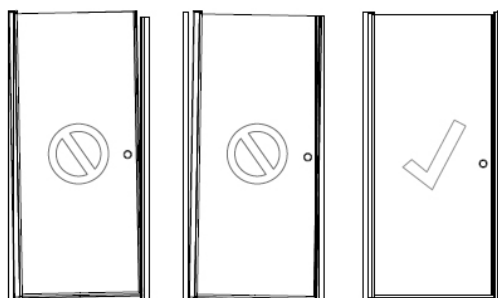


To ensure the magnetic strip seals firmly, slide the shower door slightly to the left or right until it aligns and connects securely.


Step 9

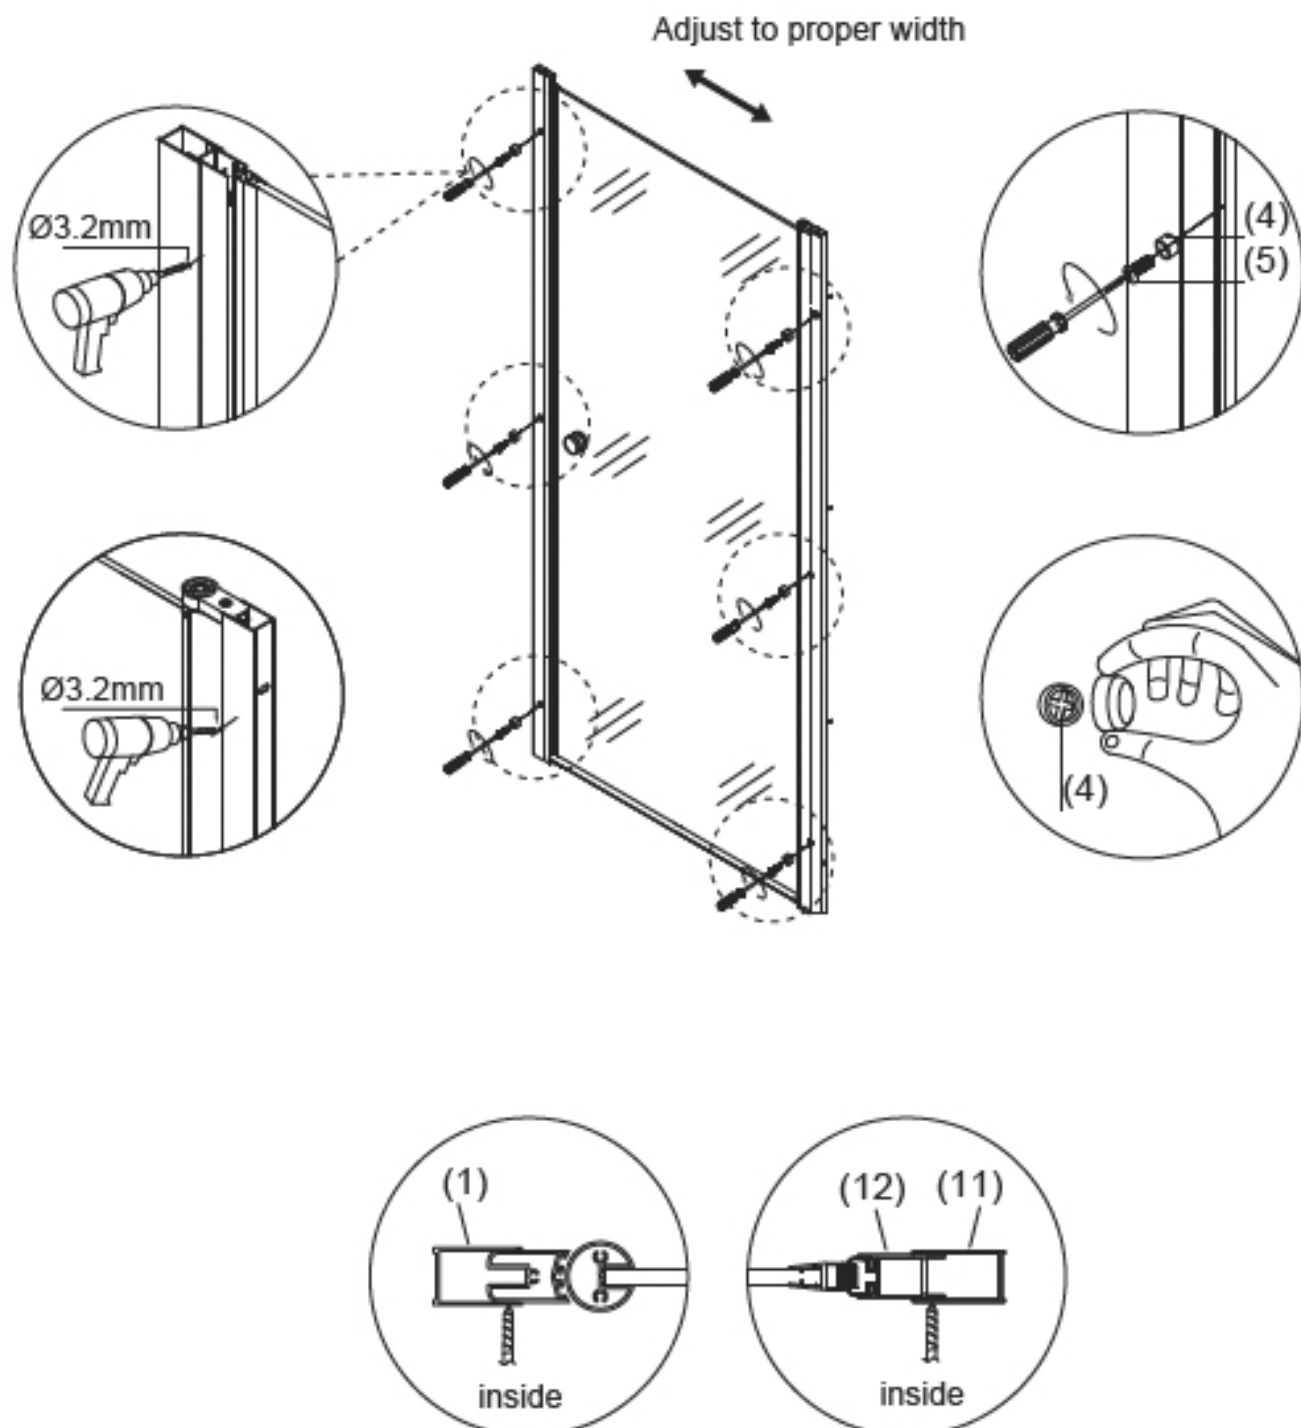

Step 10

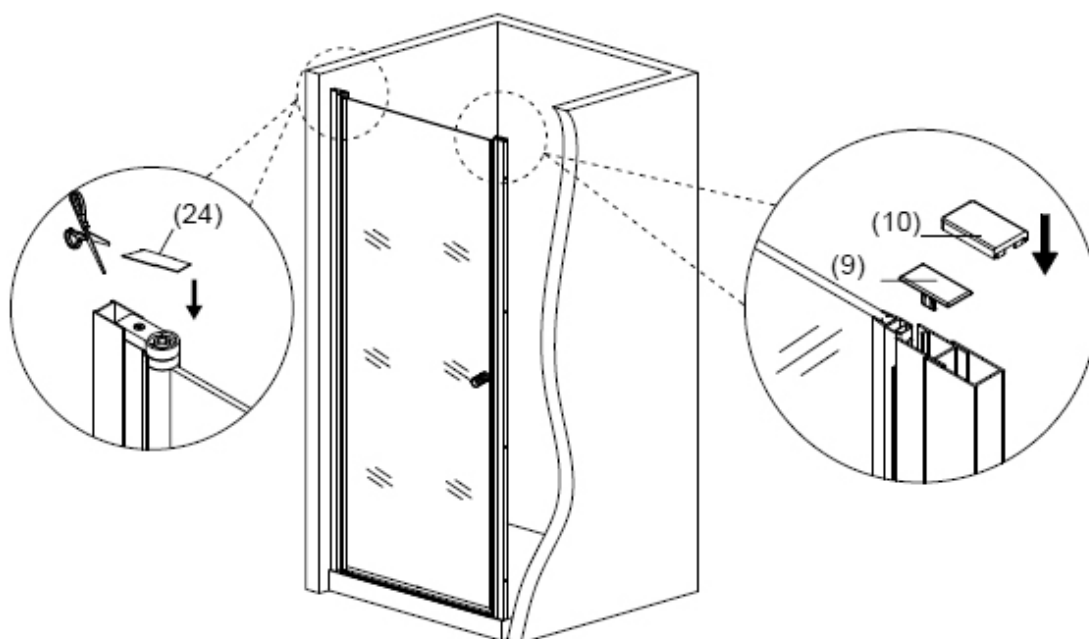

Step 11

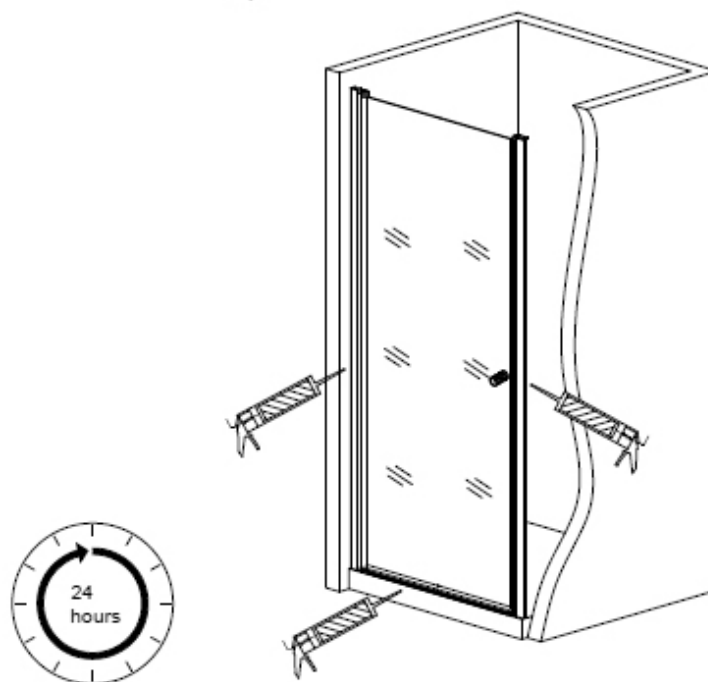

Allow 24 hours for silicone to dry before use.
Silicone on the outside edge only



Environment Protection, Waste Electrical and Waste Electronic Equipment Regulations (WEEE)



Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of in an environmentally friendly way. Drain any fluids (if applicable) into approved containers, in accordance with local waste regulations.



Please note that this product contains one or more batteries. It is our policy to continually improve products and we reserve the right to alter data, specifications and parts without prior notice. No liability is accepted for incorrect use of this product. Guarantee is 12 months from purchase date, proof of which is required for any claim.



Jack Sealey (EU) Ltd t/a Dellonda Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Jack Sealey Ltd t/a Dellonda Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Tel: 01284 757575 • Email: support@dellonda.co.uk • Web: www.dellonda.co.uk