



53L GRAVITY FED MOBILE DISPENSING TANK

MODEL NO: **DT53**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear eye protection



Wear protective gloves

1. SAFETY

- ❑ **WARNING!** Ensure all Health and Safety, local authority and general workshop practice regulations are strictly adhered to when using this equipment.
- ✓ Familiarise yourself with the applications, limitations and potential hazards of this product.
- ✓ Maintain the tank in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. Use genuine parts only. Unauthorised parts will invalidate the warranty.
- ✓ Use only with Diesel, Oil and Water.
- ✓ Ensure safety eye protection and protective clothing are worn when using this product.
- ✓ Keep the work area clean and uncluttered and ensure that there is adequate lighting.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Keep children and unauthorised persons away from the work area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- ✗ **DO NOT** use the tank to transfer hazardous or harmful chemicals, solvents, petrol or acids.
- ✗ **DO NOT** use the pump for any purpose other than for which it is designed.
- ✓ Keep the tank clean and store in a safe, dry location when not in use.

2. INTRODUCTION

Manufactured from high-density polyethylene. 53L Capacity suitable for the distribution of Diesel, Oil and Water. Fitted with two roller wheels, hose holder and vent valve. Gravity fed system features a 3m delivery hose and manual dispensing nozzle. Designed for on site and marina locations. Not suitable for petrol.

3. SPECIFICATION


Model no.: DT53
Flow rate: Maximum: 8L/min
Size (W x D x H): 41.5 x 28.3 x 84.4cm

4. OPERATION

- 4.1. Connect delivery tube to Tank Stop Valve (fig.1).
- 4.2. Open Tank Stop Valve and Hose Stop Valve.
- 4.3. Open Vent Screw on filler cap (fig.1).
- 4.4. Squeeze the Pump Lever to begin fluid flow.
- 4.5. Release the Pump Handle to stop the flow.
- 4.6. After use, close both stop valves and the Vent Screw.

5. MAINTENANCE

- 5.1. Check the tightness of all fittings regularly and tighten if necessary.
- 5.2. Keep the pump unit clean to highlight any leaks which may develop in service.

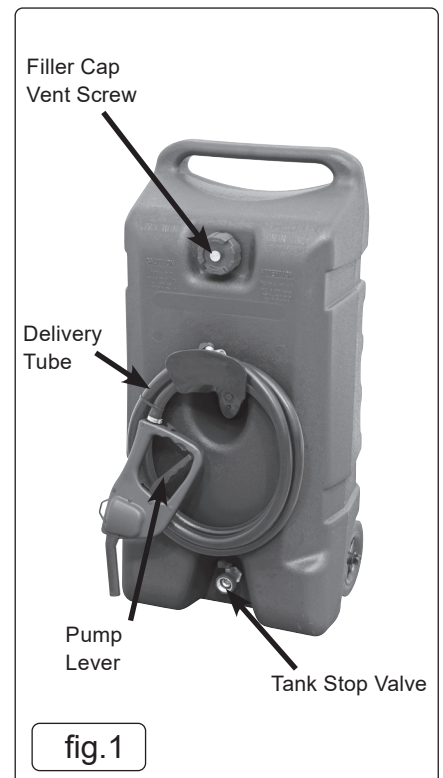

Parts support is available for this product. Please email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk