

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

**⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.**

### 1. SAFETY INSTRUCTIONS

- ✓ Familiarise yourself with the application and limitations of the hose reel, as well as the specific hazards.
- ❑ **WARNING!** Disconnect the hose reel from the water supply before changing accessories, servicing or performing any maintenance.
- ✓ Maintain the hose reel in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. *Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Locate and fix the hose reel in a suitable working area. Do not position the hose in direct sun light, or in areas of extreme heat or cold. Ensure there is adequate lighting.
- ❑ **WARNING!** Ensure maximum pressure is not exceeded.
- ✓ Keep extended hose away from heat, oil and sharp edges. Check hose for wear before each use, and ensure all connections are secure.
- ✓ Keep the unwound hose at a safe distance from the working area and free from oily surfaces.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings, and other loose jewellery and contain and/or tie back long hair.
- ✓ Keep children and unauthorised persons away from the working area.
- x **DO NOT** operate the hose reel if any parts are damaged or missing as this may cause failure and/or personal injury.
- x **DO NOT** exceed the rated capacity of the hose reel.
- x **DO NOT** use the hose reel for any purpose other than that for which it is designed.
- x **DO NOT** yank the hose from the water supply.
- x **DO NOT** operate the hose reel when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- x **DO NOT** direct water from the water hose at yourself or others.
- ✓ When not in use ensure the water supply is turned off and tools disconnected. Disconnect from the water supply and retract the hose into case.

### 2. INTRODUCTION & SPECIFICATION

Heavy-duty steel open style construction with mounting bracket for fixing to wall or floor. Suitable for industrial applications or areas where longer length of hose is required. Will hold up to 80mtr (270ft) of Ø13mm hose. Spring loaded pin for locking drum.

Hose Capacity (not supplied): . . . . .80mtr x Ø13mm	Max Pressure: . . . . .300psi (20bar)
Inlet/Outlet: . . . . .13mm(1/2")	Weight (Excluding Hose): . . . . .19kg

### 3. MOUNTING/ASSEMBLY

- ❑ **WARNING!** Ensure the hose is disconnected from the water supply. Do not position the hose in direct sun light or in areas of extreme heat or cold.
- 3.1. To wall mount the reel first remove the wall mounting bracket from the reel by removing securing bolts/nuts (fig 1 & 2).
  - 3.2. Fix the bracket in an appropriate position ensuring that the wall and the mounting screws and plugs will adequately support the weight of the reel and the tension of the hose as it is pulled from the reel.
  - 3.3. Re-attach the reel to the bracket ensuring that the bolts/nuts are securely tightened.
  - 3.4. Ensure that the hose reel is located so that the hose can be pulled out to, and reeled back from work sites without causing unnecessary sideways force.
  - 3.5. It is recommended that three people fit the reel to the chosen surface, two to support the weight and the third to secure the reel using the bolt holes (fig 3 overleaf). Sturdy masonry bolts are suitable for securing the hose reel, providing they give ample support during the unreeling/reeling of the hose.

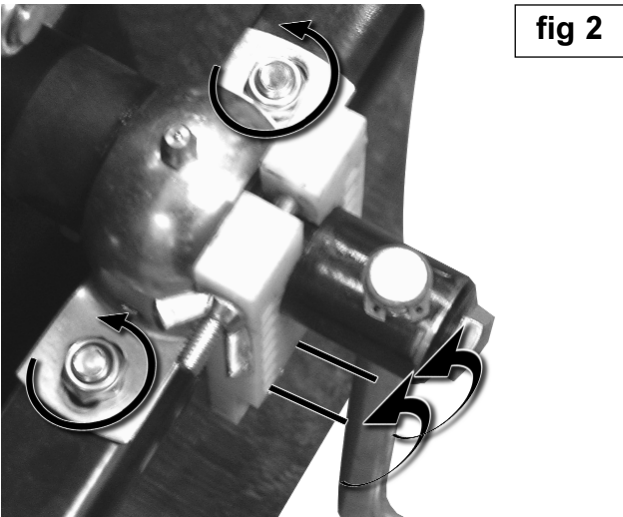
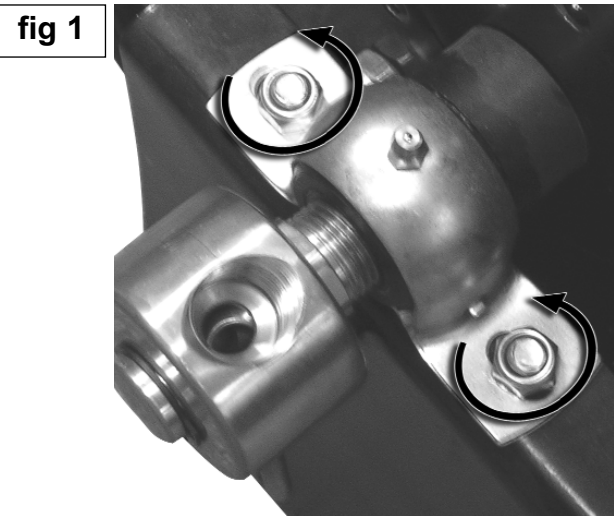


fig 3


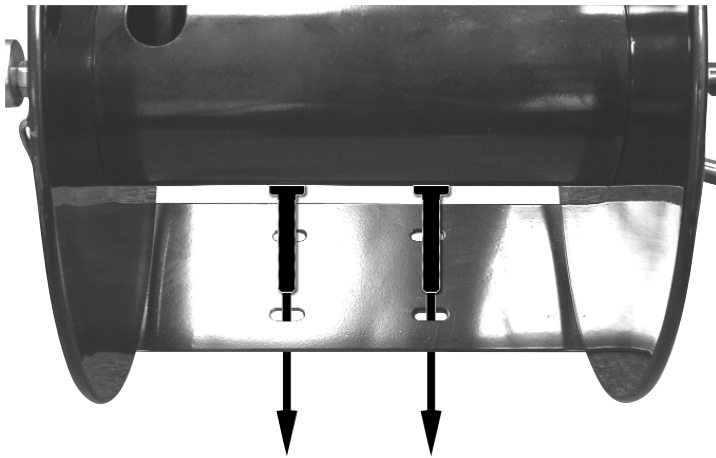


fig 4

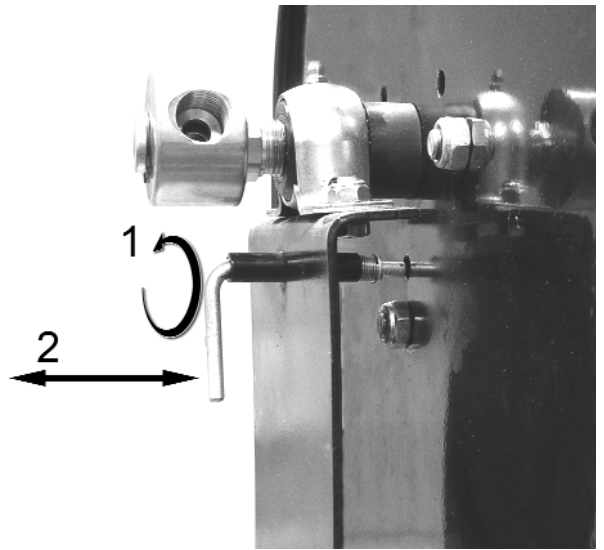

## 4. OPERATION

### 4.1 ADJUSTING THE HANDLE

4.1.1 To adjust the handle, or to stow it away, simply loosen the bolt situated at the end of the handle guide with a 14mm spanner/socket, adjust to the suited position and tighten.

### 4.2 EXTENDING THE HOSE

4.2.1 First of all release the reel latch (fig 4).

4.2.2 When extending the hose, it is recommended to assist the hose by using the handle, this will decrease the strain on the wall mount and lower the risk of damaging parts of the hose reel.

### 4.3. RETRACTING THE HOSE.

4.3.1 When retracting the hose, always make sure the reel is unplugged from the water supply, also make sure there is plenty of space to perform the task. Free the hose's path of any obstructions and check for kinks in the hose before reeling in.

4.3.2 When the task is complete re-insert the reel latch (fig 4).

## 5. MAINTENANCE & STORAGE

**⚠ WARNING!** Before attempting maintenance or inspection vent any pressure remaining in the hose.

To ensure reliable operation, clean the hose and casing regularly. **DO NOT** spray or wet the product, but clean with a cloth and warm water. **DO NOT** use solvents or detergents, as these may permanently damage the item.

### STORAGE:

Should you wish to store the hose and reel, ensure they are clean and dry. Place in a dark, safe, dry, childproof location, where the temperature will remain reasonably stable. **DO NOT** store in a nylon, or plastic, bag as this will encourage condensation.

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this equipment. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

**SEALEY POWER PRODUCTS**

Sole UK Distributor, Sealey Group, Bury St. Edmunds, Suffolk.



01284 757500



01284 703534



[www.sealey.co.uk](http://www.sealey.co.uk)



[sales@sealey.co.uk](mailto:sales@sealey.co.uk)