

360° 16 SMD & 3W SMD LED RECHARGEABLE INSPECTION LIGHT

MODEL NOS: LED360PLUS.V2, LED360PLUSG.V2 LED360PLUSR.V2

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



. SAFETY

instructions

- Inspect the cable and connector for wear and damage to ensure items are safe before connecting to the power supply. If worn or damaged DO NOT use.
- ✓ Ensure the lamp is fully charged before initial use.
- **DO NOT** charge in damp conditions.
- **DO NOT** turn the lamp on when it is being charged.
- **DO NOT** shine directly into your, another person's or an animal's eyes.
- **DO NOT** allow children to use the lamp.
- **DO NOT** handle or move the lamp whilst it is being charged.
- DO NOT use the lamp if you suspect that the battery or the lamp casing is damaged.
- **DO NOT** leave battery in a discharged state, recharge battery immediately. Before storage, fully recharge the battery, subsequently recharge the battery at least once every six months of non-use.
- **DO NOT** attempt to open, disassemble, modify or service the battery pack.
- **DO NOT** crush, puncture, short external contacts or dispose of in fire or water.
- **DO NOT** expose to temperatures above 60°C (140°).
- ✓ Replace only with the battery pack designated for this product.
- ✓ Recycle or dispose of used battery as stipulated by local regulation.
- ✓ If the electrolyte in the cells gets on your skin, thoroughly wash with soap and water. If it gets in your eyes, rinse thoroughly with cool water and seek immediate medical attention.

2. INTRODUCTIONS

Unique and innovative 360° swivel and tilt function enables the light source to be positioned in any direction. Includes two 3.7V 2.6Ah rechargeable lithium-ion batteries in parallel for up to 15 hours run time. 16 SMD LEDs providing up to 700 lumens output with 120° spread of light, illuminating the whole work area. Includes an additional 3W LED directional torch. Features two swivel hooks and three rubber covered magnets, two on the rear and one on the end, which allow hands-free operation. Supplied with high quality braided USB cable.

3. SPECIFICATION


Model No	LED360PLUS.V2
Battery:	3.7V 2.6Ah Lithium-ion (x2)
Charging Time:	7hr
IP Rating:	IP54
	16 SMD + 3W SMD
	Side(High/Low)/Top - (700/350)/150lm
Maximum Length:	276mm
Minimum Length:	256mm
-	Side(High/Low)/Top - (6/12)/15hr

The battery fitted to this lamp is considered to be a consumable item and its ability to accept a charge will reduce over time. We will provide warranty against mechanical and electrical defect for a period of one year - this does not cover fair wear and tear. If the battery is not properly charged before first use, or regularly conditioned, its capacity will diminish. Under these circumstances we will not replace the battery regardless of whether it is less than one year old.

Note: The lithium battery does not suffer from memory effect and once fully charged may be stored for up to six months without another charge.

4. OPERATION

- **4.1.** Connect the USB lead to the rear of the lamp. Plug into USB power supply and turn on, the charging LEDs on the lamp will flash green to show that charging has commenced.
- **4.2.** The number of green lights flashing indicate the level of charge.
- **4.3.** When the battery has charged fully all the LEDs will show steady green.
- **4.4.** Direct the lens away from your eyes before switching on.
- **4.5.** Toggle the lamp between the end light and side light using the ON/OFF switch.
- **4.6.** The output of the side LED can be varied by pressing the switch a further time.
- **4.7.** The lamp may be suspended by the hooks or attached to any ferrous surface by using the magnets. When the light is hanging from the hook it can be rotated through 360° for more precise positioning.
- 4.8. Separate the top and bottom sections by pulling apart. When attached to a ferrous surface, using the base magnet, the lamp can

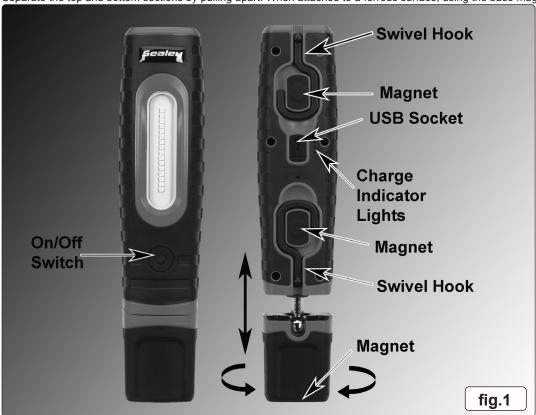



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.





WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



BATTERY REMOVAL Remove 6 screws on back of lamp. Remove rear casing and disconnect the wiring from the circuit board. Remove battery and dispose of according to local authority guidelines.

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR 01284 757500 Representation of the sealey o