

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



**IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.**

### 1. SAFETY INSTRUCTIONS

- ✓ Familiarise yourself with the application and the limitations and potential hazards of the stand.
- ✓ Maintain stand in good condition (use authorised replacement parts).
- ✓ Keep the stand clean for best and safest performance.
- ✓ Locate the rack in a suitable work area.
- ☐ **WARNING!** Use stand on level and solid ground, preferably concrete.
- ✗ **DO NOT** overload the stand.
- ✗ **DO NOT** climb on the stand.
- ✗ **DO NOT** use stand for any purpose other than for which it is designed.
- ✗ **DO NOT** use the stand if any parts are damaged or missing as this may cause failure and/or personal injury.
- ✓ Keep the work area clean, uncluttered and ensure that there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the work area.

### 2. INTRODUCTION



Adjustable padded arms and chains support bumpers during preparation and spraying. Main frame pivots and locks through 180°. Two castor wheels allow manoeuvrability between preparation area and spray booth.

### 3. ASSEMBLY INSTRUCTIONS

- 3.1 Check that all contents are present and familiarise yourself with the parts.
- 3.2 Attach the Bottom 'L' tube (7) to the Erect tube (8) using a 5/16" x 2-1/2" screw (6), two 5/16" washers (3) and a 5/16" nut (2).
- 3.3 On either side of this assembly place a Base tube (1) and clamp the four components together as shown in Fig.2 using two 5/16" x 3-1/2" screws (4), two 5/16" washers (3) and a 5/16" nut (2). Ensure that the Castor fixing hole in each base tube will be at the same end of the stand.
- 3.4 Attach a Castor wheel (5) to the open end of each Base tube (1) using two 5/16" washers (3) and two 5/16" nuts (2).
- 3.5 Lay the tubular part of the Angular adjuster (14) onto a flat surface. Place an Oblique tube (10) either side of it and clamp the three components together using two 5/16" x 3-1/2" screws (4), two 5/16" washers (3) and two 5/16" nuts (2). Ensure that the holes for the cross tubes (11) are adjacent to each other before assembling and that when assembled the cross tube mountings are positioned over the castor wheels.
- 3.6 Invert the assembly so that the quadrant of the Angular adjuster (14) is facing downwards and mount the assembly to the top of the Erect tube (8) using a 3/8" x 1-3/4" screw (15), two 3/8" washers (16) and a 3/8" Lock nut (13).
- 3.7 Rotate the assembly to a horizontal position and insert the Locking pin (17) through the Erect tube (8) and into the nearest hole in the angular adjuster.
- 3.8 Mount a Cross tube (11) to each Oblique tube (10) as shown in Fig.2 using a 5/16" x 2-1/2" screw (6), two 5/16" washers (3) and a 5/16" Lock nut (12) for each tube. Adjust the nuts to allow the cross tubes to rotate.
- 3.9 Have the two chains (9) ready to hand to secure a bumper to the frame.

### 4. OPERATION

- 4.1 With the help of a second person lift the bumper into position and find a suitable feature for the cross tubes to rest against.
- 4.2 Hook the chains to a suitable feature on each end of the bumper and stretch the chain backwards to the other end of the Oblique tubes and pass the chain links into the slots in the ends of the tubes. Do not let go of the bumper until you are sure that it is properly secured

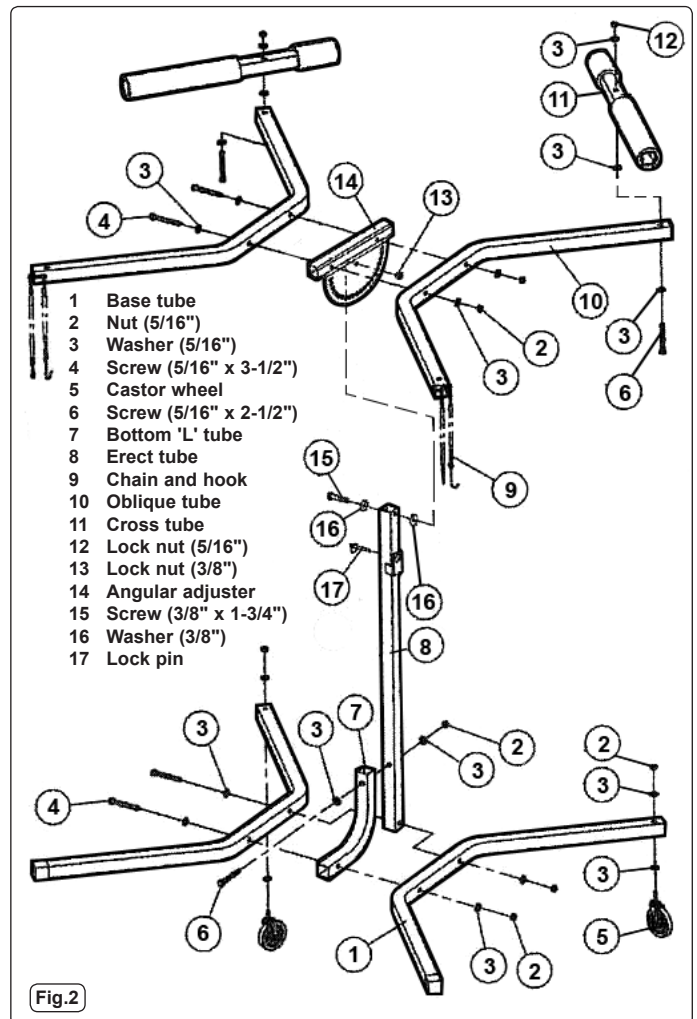

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim.

**INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.

