

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.




IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- x **DO NOT** place hands, or any other part of your body within the concertina structure at any time.
- ✓ Maintain stand in good condition (use authorised replacement parts).
- ✓ Keep the stand clean for best and safest performance.
- ✓ Locate the stand in a suitable work area.
- WARNING!** Use stand on level and solid ground, preferably concrete.
- x **DO NOT** overload the stand.
- x **DO NOT** climb on the stand.
- x **DO NOT** use stand for any purpose other than for which it is designed.
- x **DO NOT** use the stand if any parts are damaged or missing as this may cause failure and/or personal injury.
- ✓ Keep the work area clean, uncluttered and ensure that there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the work area.

2. INTRODUCTION

Extending and height adjustable stand, ideal for a variety of applications. Mounted on smooth rolling castor wheels with brake. Soft foam padded arms help prevent damage to workpiece. Ideal for professional bodyshop use.

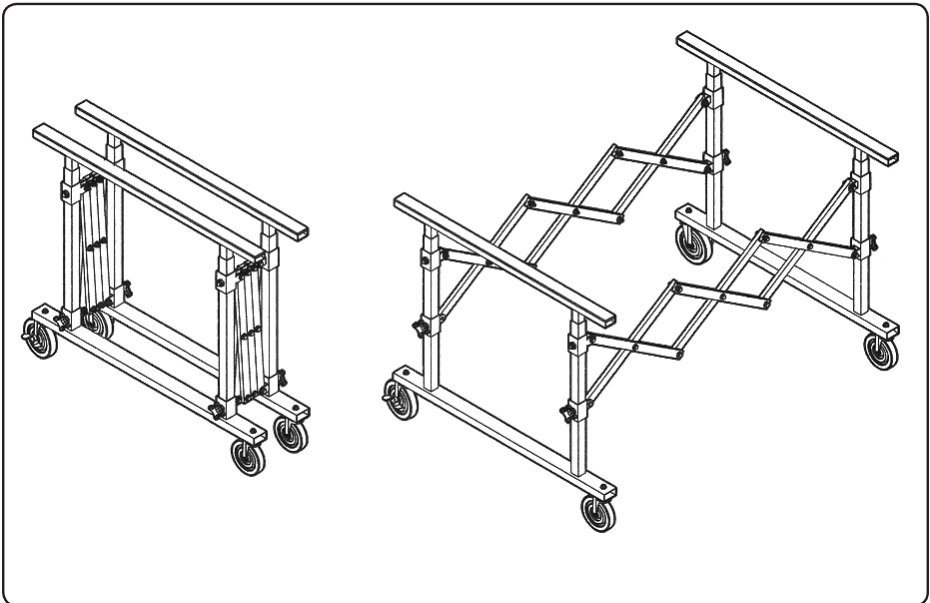


3. ASSEMBLY INSTRUCTIONS

NOTE: Numbers in brackets refer to the component numbers in Fig.2.


- 3.1 Assemble the two concertinas using 6 square tube components (12) either side. Each joint should be assembled using one 1-1/4" x 1/4" screw (7), three 1/4" washers (8), and one 1/4" lock nut (11). Leave the joints loose enough to allow the concertinas to open and close. Assemble 3 pairs of crossed tubes first then join them together into a six segment concertina. Repeat the process for the second side. Match the two concertinas together so they are both the same height and length.
- 3.2 Attach two castor wheels to each bottom supporter (4) using two 3/8" washers (2), and one 3/8" nut (3) for each castor wheel.
- 3.3 Over each upright of each bottom supporter (4) slide two set tube components (6). Ensure that the threaded hole in each set tube will be facing away from the assembled frame. Screw a knob (5) into the four lower set tubes (6). Do not tighten at this stage. Insert a screw (13) into the four upper set tube components. Do not tighten at this stage.
- 3.4 Slide a top supporter (9) into each bottom supporter (4). Set both top supporters at the same height and insert a pin (10) into each upright to retain them.
- 3.5 Take one end frame and attach a concertina to one of the uprights. Connect it to the lower set tube (6) using one 1-1/4" x 1/4" screw (7), two 1/4" washers (8), and one 1/4" lock nut (11).
- 3.6 Slide the upper set tube (6) up the upright and align it with the upper end of the concertina and connect the two using one 1-1/4" x 1/4" screw (7), two 1/4" washers (8), and one 1/4" lock nut (11).
- 3.7 Attach the other end of the concertina to the other end frame in the same manner.
- 3.8 Attach the other concertina to the other side of the end frames.
- 3.9 With the set tube components (6) still loose, close the stand right up ensuring that the lower set tubes are resting on the frames. Tighten the screws (13) in the four upper set tube components to lock them in place.
- 3.9 To test the action of the concertinas, ensure the four lower set tubes are loose. With the aid of a second person open and close the stand. Keep hands out of concertina area. If the action is too loose, tighten the concertina joints. If the action is too tight, loosen the concertina joints.
- 3.10 When the action of the concertinas is satisfactory the stand can be locked at any length by tightening the knobs (5) on the lower set tube components.

4. OPERATION

- 4.1 Match the length of the stand to the length of the panel to be sprayed by opening or closing the concertinas.
- 4.2 To do this, loosen the knobs on the four lower set tube (6) components and with the help of a second person expand or contract the stand as required.
- 4.3 Retighten the knobs on the four lower set tube components to lock the stand.
- 4.4 Set the height of the end frames as required by removing the locking pins and raising or lowering the upper supports and reinserting the pins.
- 4.5 Place the panel onto the stand and check that it is stable before moving the stand.
- 4.6 When the stand is in the processing area lock the castor wheels.

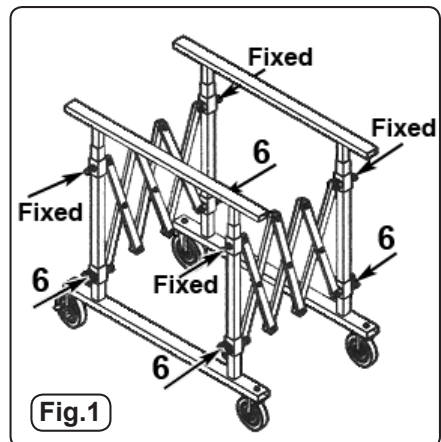

- 1 Wheel (4)
- 2 Washer (3/8") (8)
- 3 Nut (3/8") (4)
- 4 Bottom supporter (2)
- 5 Knob (4)
- 6 Set Tube (8)
- 7 Screw (1/4" x 1-1/2") (22)

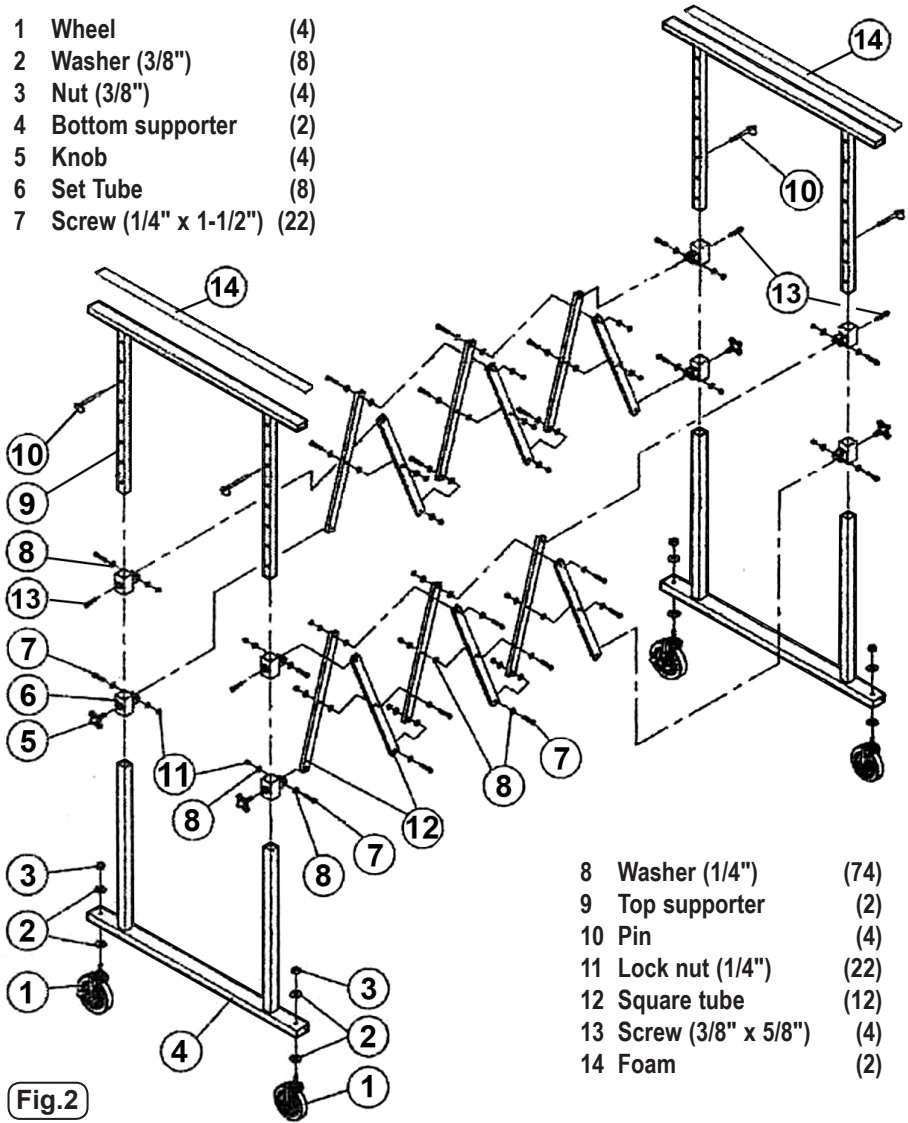

- 8 Washer (1/4") (74)
- 9 Top supporter (2)
- 10 Pin (4)
- 11 Lock nut (1/4") (22)
- 12 Square tube (12)
- 13 Screw (3/8" x 5/8") (4)
- 14 Foam (2)

Fig.2

Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to www.sealey.co.uk, email sales@sealey.co.uk or phone 01284 757500.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.
IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
 Kempson Way, Suffolk Business Park,
 Bury St. Edmunds, Suffolk,
 IP32 7AR

01284 757500

www.sealey.co.uk

01284 703534

sales@sealey.co.uk