

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1. GENERAL SAFETY


- WARNING!** Ensure Health & Safety, local authority and general workshop practice requirements are adhered to when using this equipment.
- WARNING!** Always refer to the motorcycle manufacturer's service instructions, or a proprietary manual to establish the current procedure for rear wheel alignment.
- ✓ Ensure that the motorcycle chain is in good condition.
- ✓ Use the chain alignment tool in a suitable work area. Keep the area clean and tidy and ensure there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the work area.
- ✓ Keep fingers clear of the chain and sprocket when using the chain alignment tool.
- x **DO NOT** use the chain alignment tool for any purpose other than for which it is designed.
- x **DO NOT** use the chain alignment tool if any part of it is damaged or missing.
- x **DO NOT** allow untrained persons to use the chain alignment tool.
- x **DO NOT** attempt to align a motorcycle chain when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✓ When not in use, clean the chain alignment tool and store in a safe, dry, childproof area.

2. INTRODUCTION

Simple to use yet accurate tool for correct alignment of the chain and sprocket. Helps prevent wear to the chain and sprockets.

3. OPERATING INSTRUCTIONS

- WARNING!** Before using the chain alignment tool ensure that you have read and understood the Safety Instructions in Section 1.
- 3.1. Attach the chain alignment tool to the sprocket as shown in fig.1. Position the tool so that the wire indicator is aligned with the white marker line on the body of the tool. Tighten bolt 'B' to clamp the chain alignment tool to the sprocket.
- 3.2. Insert the alignment rod into the top of the chain alignment tool and clamp into position by tightening screw 'A'.
- 3.3. Observe the position of the alignment rod as shown in fig.2. Referring to the motorcycle manufacturer's service instructions, or a proprietary manual, align the rear wheel so that the chain runs parallel with the alignment rod on the chain alignment tool.
- 3.4. Ensure that the motorcycle chain is correctly tensioned. Fully tighten the rear wheel fixings and engage any locking devices.
- 3.5. Remove the chain alignment tool from the sprocket and check that the rear wheel will rotate freely.

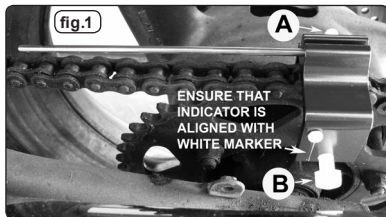

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.