



MOTORCYCLE PORTABLE FUEL TANK 1L

MODEL NO: MS029.V3

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear eye protection



Wear protective gloves



Wear safety footwear




Wear protective clothing



Highly flammable

1. SAFETY

- WARNING: DO NOT SMOKE OR USE A NAKED FLAME WHILE USING THIS ITEM. BE AWARE THAT PETROL VAPOUR IS HEAVIER THAN AIR AND FORMS AN EXPLOSIVE MIXTURE.**
- WARNING!** Ensure Health & Safety, local authority and general practice regulations are adhered to when using this equipment.
- WARNING!** Always wear approved eye protection and appropriate protective clothing including gloves.
- × **DO NOT** use to store fuel.
- × **DO NOT** use the tank for any other purpose than that for which is designed.
- ✓ Ensure that the working area is well ventilated.
- ✓ Check that the hose clips are tight before use.
- ✓ Check the condition of the hose before use.
- ✓ Ensure that the hose delivery valve is closed before filling.
- ✓ Fill with the minimum amount of petrol necessary for each engine test.
- ✓ Ensure that the cap is secure.
- ✓ Check the unit for leaks before use.
- ✓ Any fuel spillage should be cleaned up immediately to avoid the risk of accidental ignition.
- ✓ If fuel leakage is noticed at any time, abort the engine test, close the delivery valve and remove the tank to an open area.
- ✓ After use, drain the tank of petrol into an approved container. Leave the cap off and the valve open to allow any fuel residue in the portable fuel tank to evaporate.
- ✓ When dry and clear of vapour: store in a cool, dry, childproof location.

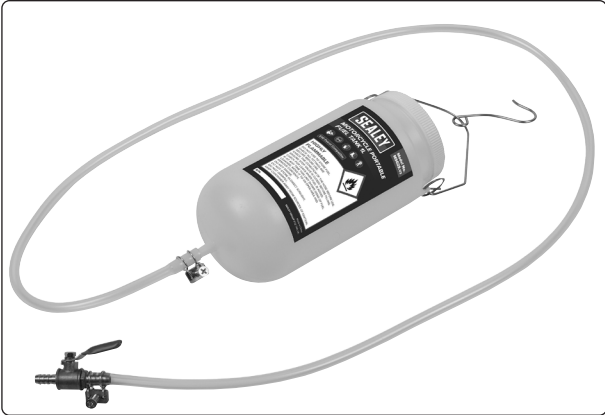

2. INTRODUCTION

Must have item when needing to remove fuel tank to perform motorcycle maintenance. Eliminates the need to balance fuel tank in an awkward position. Simply remove your tank, connect the auxiliary fuel tank, which is gravity fed, and hang it up using the hook provided. Features 1L tank, 1.5m hose, two hose clamps, two hose clips and on/off tap. For dual entry carburettor systems, use the Model No. MS029DCK Fuel Feed Lines. Suitable for E10 petrol.

3. SPECIFICATION

Model No.: MS029.V3
 Tank Size: 1L
 Hose Length: 1500mm
 Nett Weight: 0.3kg



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR

01284 757500 sales@sealey.co.uk www.sealey.co.uk



REGISTER YOUR PURCHASE HERE