

CABLE OILER HYDRAULIC TYPE

MODEL NO: MS0381

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



SAFETY 1.


- WARNING! Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment
- Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- Maintain the pump station in good condition (use an authorised service agent).
- Replace or repair damaged parts. Use genuine parts only. Non authorised parts will invalidate the warranty.
- Ensure safety eye protection, oil resistant gloves and protective clothing are worn when using this product.
- Keep the work area clean, uncluttered and ensure there is adequate lighting.
- Maintain correct balance and footing. Ensure the floor is not slippery and wear non slip shoes.
- Keep children and unauthorised persons away from the working area.
- After use, drain any fluids from the equipment before storage.
- Dispose of waste liquids in accordance with local authority regulations.
- ~ Keep the oiler clean and store in a safe dry, childproof location.
- WARNING! DO NOT allow uncontrolled discharge of fluids thus polluting the environment. All liquids must be disposed of according to local authority regulation

2. INTRODUCTION

Hydraulic cable oiler, forces oil between inner and outer cables throughout their entire length leaving them silky smooth. For use on brake, throttle, speedo and choke cables for motorcycle, car, bicycle and lawnmowers that require regular oiling as part of their servicing. Easyto-use and cleaner to service the most popular size cables up to 8mm. Avoids replacing cables that are worn or seized. Results in smooth operating cables.


CONTENTS

Description
Body
Ram
Compression Discs
Neoprene Collar
Pressure Cap
End Cap



4. OPERATION

- **4.1.** Pass cable over pressure cap (5).
- **4.2.** Assemble the neoprene collar (4) with a compression disc (3) either side.
- 4.3. Press the cable end into the slots in items 4 and 3 and press the complete arrangement into the base of the body.
- **4.4.** Firmly screw on the pressure cap (5) to ensure a good grip of neoprene collar (4) onto the cable.
- **4.5.** Unscrew ram (2) and end cap (6) fully and remove from body (1). Fill the chamber to within 20mm from its end with the required lubricant and replace end cap.
- **4.6.** Screw the ram down until lubricant is forced fully through the cable housing.
- **4.7.** Before removing cable, unscrew the end cap (6) and drain off surplus lubricant.

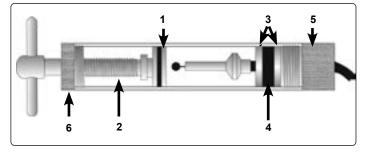



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR 01284 757500 01284 703534 @ sales@sealey.co.uk www.sealey.co.uk

Original Language Version