

**SEALEY****POWER****TOOLS**

INSTRUCTIONS FOR:

# AIR CUT-OFF TOOL 75mm

MODEL No: **SA650.V2**

Thank you for purchasing a Sealey Product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



**IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.**

## 1. SAFETY INSTRUCTIONS

- ✓ Follow all workshop Health & Safety rules, regulations and conditions when using tool.
- ❑ **WARNING!** Disconnect from air supply before changing cutting disc or servicing.
- ✓ Maintain tool in good condition and replace any damaged or worn parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ❑ **WARNING!** Check correct air pressure is maintained and not exceeded. We recommend 90psi.
- ✓ Keep air hose away from heat, oil and sharp edges. Check air hose for wear before each use and ensure that all connections are secure.
- ❑ **WARNING!** Before each use check cutting disc is secure and the disc is not worn or damaged. If damaged replace immediately.
- ✓ Ensure replacement discs are not damaged in any way such as cracks, deformations or splinters etc. Also check the mounting washer to ensure it is not deformed, burred or notched. Damaged washer must not be used as it may cause irregular pressure on the disc which may cause the disc to break. DO NOT over tighten a disc and never tamper with a disc in order to adapt it to a different size holder.
- ✓ Always use the correct disc suitable for the material being cut. Ensure the maximum speed specification of the cutting disc is higher than that indicated on the machine data plate.
- ❑ **WARNING!** Keep disc guard in place, tight and in good working order. The safety guard is a mandatory fitting where tool is used in premises covered by the Health & Safety at Work Act.
- ❑ **WARNING!** Always wear approved eye or face protection when operating the tool.
- ✓ Use breathing protection in accordance with COSHH regulations if fumes or dust pose a hazard.
- ✓ Wear ear defenders and gloves if necessary.
- ✓ Keep hands and body clear of the workpiece when operating the tool.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Secure unstable workpiece with a clamp, vice or other adequate holding device.
- ✓ Keep children and non essential persons away from the working area.
- ✓ Avoid subjecting disc to excessive strain, always ease disc down against workpiece (a harsh impact may break the disc). Do not use force in order to cut workpiece. Maintain a controlled progression.
- ✗ DO NOT get the tool wet or use in damp or wet locations.
- ✗ DO NOT hold the workpiece by hand. Use clamps or a vice to secure the workpiece.
- ✗ DO NOT use the tool for a task it is not designed to perform.
- ❑ **WARNING!** DO NOT use tool if damaged or faulty. Contact your local service agent.
- ✗ DO NOT use tool unless you have been instructed in its use by a qualified person.
- ✗ DO NOT position your body in line with the disc whilst cutting, and DO NOT remove the safety guard whilst in use.
- ✗ DO NOT carry the tool by the air hose, or yank the hose from the air supply.
- ✗ DO NOT direct air from the air hose at yourself or others.
- ❑ **WARNING!** DO NOT cut any materials containing asbestos.
- ✗ DO NOT switch the tool on whilst the disc is in contact with the workpiece.
- ✗ DO NOT allow workpiece to over heat. Periodically cool by immersing the workpiece in water.
- ✗ DO NOT use tool where there are flammable liquids, solids or gases such as paint solvents, including waste wiping or cleaning rags etc. as any sparks generated may be dangerous.
- ✗ DO NOT touch the workpiece close to the ground surface as it will be very hot. Allow to cool. The workpiece may also be very sharp.
- ✗ DO NOT operate tool if you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✓ When not in use disconnect from air supply and store in a safe, dry, childproof location.

## 2. INTRODUCTION & SPECIFICATION

Shaped composite cover moulded around lightweight aluminium alloy housing for ultimate comfort and control. Air motor with quality bearings for smooth and powerful operation. Integral sintered brass baffle with rear exhaust gives quiet operation. Fitted with metal safety guard and safety trigger. Supplied with spanner and key. Disc not included.

Disc size	76x2x10mm
Free speed	20,000rpm
Air consumption	3cfm
Operating pressure	90psi
Air inlet size	1/4" BSP
Weight	0.8kg
Noise Power	89DB.A
Noise Pressure	100.8dB.A

**Spare disc part no: PTC/3C (single) or PTC/3C5 (Pack of 5).**



## 3. PREPARING TOOL FOR USE

### 3.1. Air Supply



Recommended hook-up procedure is shown in fig 1.

- 3.1.1. Ensure tool air valve (or trigger) is in "Off" position before connecting to the air supply.
- 3.1.2. You will require an air pressure of 90psi, and an air flow according to specification.
- 3.1.3.  **WARNING!** Ensure the air supply is clean and does not exceed 90psi while operating the tool. Too high an air pressure and unclean air will shorten the product life due to excessive wear, and may be dangerous causing damage and/or personal injury.
- 3.1.4. Drain the air tank daily. Water in the air line will damage the tool.
- 3.1.5. Clean air inlet filter weekly.
- 3.1.6. Line pressure should be increased to compensate for unusually long air hoses (over 8 metres). The minimum hose diameter should be 1/4" I.D. and fittings must have the same inside dimensions.
- 3.1.7. Keep hose away from heat, oil and sharp edges. Check hose for wear, and make certain that all connections are secure.

### 3.2. Couplings.

Vibration may cause failure if a quick change coupling is connected directly to the tool.

To overcome this, connect a leader hose to the tool. A quick change coupling may then be used to connect the leader hose to the air line recoil hose. See fig 1 & 2.

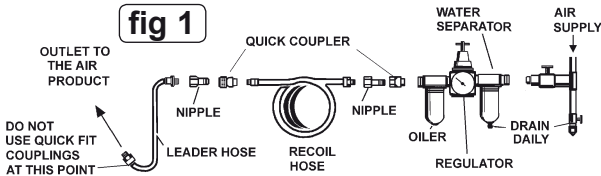

## 4. OPERATING INSTRUCTIONS

### 4.1. FITTING CUTTING DISC

- WARNING!** Disconnect from the air supply before changing disc.
- 4.1.1. Use hex key to remove hex screw (Item 40 on the parts list) and spacer (Item 39).
- 4.1.2. Place the cutting disc onto the spindle.
- 4.1.3. Replace the spacer and secure with hex screw, but do not over tighten. Check that replacement disc is not damaged, (cracks, deformations or splinters etc). Also check the mounting washer to ensure it is not deformed, burred or notched. A damaged washer must not be used as it may cause irregular pressure on the disc which may cause it to break. DO NOT tamper with a disc in order to adapt it to a different size holder.

## 4.2. OPERATING

- WARNING!** Ensure you have read, understood and apply safety instructions.
- 4.2.1. Connect the tool to the air supply.
- 4.2.2. To start the tool, hold firmly and push the trigger locking lever forward whilst depressing trigger.
- 4.2.3. The disc must be running at its maximum speed before attempting to cut the workpiece.
- 4.2.4. Slowly and smoothly bring the cutting disc toward the workpiece (avoid jerky movements).
- 4.2.5. Exert adequate pressure on the tool to allow cutting according to the type and size of the material you are working with. Avoid subjecting disc to excessive strain, always hold tool firmly and ease disc against workpiece (a harsh impact may break the disc). Maintain a controlled progression.

DO NOT allow tool to free run for an extended period of time as this will shorten its life.

## 5. MAINTENANCE

- WARNING!** Disconnect tool from air supply before changing accessories, servicing or performing maintenance. Replace or repair damaged parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- 5.1. If the air supply does not have an oiler, lubricate the air tool daily with a few drops of Sealey air tool oil dripped into the air inlet to prolong its life.
- 5.2. Clean the tool after use.
- 5.3. Loss of power or erratic action may be due to the following:
  - a) Excessive drain on the air line. Moisture or restriction in the air pipe. Incorrect size or type of hose connectors. To remedy check the air supply and follow instructions in chapter 3.
  - b) Grit or gum deposits in the tool may also reduce performance. If your model has an air strainer (located in the area of the air inlet), remove the strainer and clean it. Flush the tool out with gum solvent oil or an equal mixture of SAE No 10 oil and paraffin. Allow to dry before use.
- 5.4. For a full service contact your local Sealey service agent.
- 5.5. When not in use, disconnect from air supply, clean tool and store in a safe, dry, childproof location.

### DANGER OF FIRE/EXPLOSION HAZARD

- WARNING!** The grinding process can produce streams of sparks (especially when grinding metal) which are a potential source of ignition.
- DO NOT use the grinder where there are flammable liquids, solids or gases.**
- DO NOT allow grinder sparks to make contact with the operator's clothing or any other fabric such as cleaning rags.** Fabrics contaminated with inflammable materials such as petrol, oil, grease, paint and solvents are a particular fire hazard.
- To reduce the risk of clothing catching fire the operator should wear wool or cotton outer garments treated with a fire retardant in preference to man-made fibres.**

### **Risk of Hand Arm Vibration Injury.**

The SA650.V2 Air Cut-Off Tool 75mm Super Duty when operated in accordance with these instructions and tested in accordance with EN 28662-2: 1994 results in the following vibration emission declared in accordance with BS EN12096: 1996.

Measured vibration emission value: .....2.5m/s<sup>2</sup>      Uncertainty: ..... 1.0m/s<sup>2</sup>

**These values are suitable for comparison with emission levels of other tools that have been subject to the same test.**

**This tool may cause hand-arm vibration syndrome if its use is inadequately managed.**

**Recommended Measures to reduce risk of hand-arm vibration syndrome:** This item represents a low Hand Arm Vibration risk to users. The calculated maximum usage period exceeds 8 hours. We recommend appropriate safety equipment is utilised and regular breaks for the operator are employed to reduce any residual risk of fatigue or repetitive strain injury.

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of this product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim.

**INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,  
Kempson Way, Suffolk Business Park,  
Bury St. Edmunds, Suffolk,  
IP32 7AR

01284 757500



[www.sealey.co.uk](http://www.sealey.co.uk)

01284 703534



[sales@sealey.co.uk](mailto:sales@sealey.co.uk)