


Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.




IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1 ELECTRICAL SAFETY

- ☐ **WARNING!** It is the responsibility of the owner and the operator to read, understand and comply with the following:
 - You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. We also recommend that a Residual Current Device (RCD) is used. It is particularly important to use an RCD with portable products that are plugged into a supply which is not protected by an RCCB. If in any doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer.
 - You must also read and understand the following instructions concerning electrical safety.
- 1.1.1 The Electricity at Work Act 1989 requires that all portable electrical appliances, if used on business premises, are tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- 1.1.2 The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. If in any doubt about electrical safety, contact a qualified electrician.
- 1.1.3 Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply. See 1.1.1 and 1.1.2 and use a Portable Appliance Tester.
- 1.1.4 Ensure that cables are always protected against short circuit and overload.
- 1.1.5 Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none is loose.
- 1.1.6 Important: Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating at right.
- 1.1.7 DO NOT pull or carry the appliance by the power cable.
- 1.1.8 DO NOT pull the plug from the socket by the cable.
- 1.1.9 DO NOT use worn or damaged cables, plugs or connectors. Immediately have any faulty item repaired or replaced by a qualified electrician. When a BS 1363/A UK 3 pin plug is damaged, cut the cable just above the plug and dispose of the plug safely. Fit a new plug according to the following instructions (UK only).
 - a) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
 - b) Connect the BROWN live wire to the live terminal 'L'.
 - c) Connect the BLUE neutral wire to the neutral terminal 'N'.
- d) After wiring, check that there are no bare wires, that all wires have been correctly connected, that the cable outer insulation extends beyond the cable restraint and that the restraint is tight. Double insulated products, which are always marked with this symbol , are fitted with live (brown) and neutral (blue) wires only. To rewire, connect the wires as indicated above - DO NOT connect either wire to the earth terminal.
- 1.1.10 Products which require more than 13 amps are supplied without a plug. In this case you must contact a qualified electrician to ensure that a suitably rated supply is available. We recommend that you discuss the installation of an industrial round pin plug and socket with your electrician.
- 1.1.11 If an extension reel is used it should be fully unwound before connection. A reel with an RCD fitted is preferred since any appliance plugged into it will be protected. The cable core section is important and should be at least 1.5mm², but to be absolutely sure that the capacity of the reel is suitable for this product and for others which may be used in the other output sockets, we recommend the use of 2.5mm² section cable.

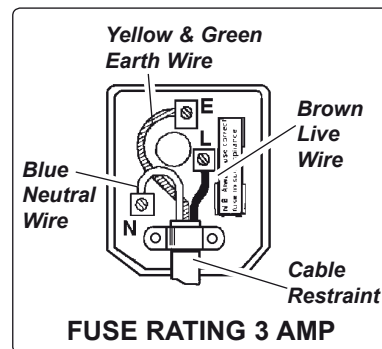

1.2 GENERAL SAFETY

- ✓ Disconnect the fan from the mains power when not in use, and before servicing or performing any maintenance or cleaning.
- ✓ Use the fan in dry areas only. Do not use in wet or high condensation locations such as bathrooms, showers, or pools.
- ☐ **WARNING!** If fan falls into water, immediately disconnect from the mains power supply. Do not touch the fan until the mains power supply has been disconnected.
- ✓ Always disconnect the fan from the power supply when moving it from one location to another.
- ✓ Keep the fan clean and maintained in good condition (use an authorised service agent).
- ✓ Use recommended parts only (unauthorised parts may be dangerous, and will invalidate your warranty).
- ✓ Place fan on a flat, level surface to avoid tipping.
- ✗ DO NOT operate the fan without the guards being in place.
- ✗ DO NOT place the fan where it may be knocked over or where the lead may cause a person to trip.
- ✗ DO NOT insert any objects through the fan guard.
- ✗ DO NOT cover the fan.
- ✗ DO NOT immerse the fan in water or any other liquid.
- ✗ DO NOT allow children to operate the fan.
- ✗ DO NOT use the fan outdoors.
- ✗ DO NOT use an extension cord unless it has been approved by an electrical authority.
- ✓ When not in use store in a safe, dry, childproof location.

2. INTRODUCTION & SPECIFICATION

Features tilt and swivel head for optimum air circulation. Touch pad/Remote control operation and fully guarded fan blades to BS5060/IEC879 for ease of use and extra safety. Smooth running motor powers both fan blades and electronically operated oscillating gearbox for even air distribution. Timer function allows preset running time between 30 minutes and 7.5 hours. Features three modes - Normal, Nature and Sleep. Nature mode for alternate strong and weak intensities of circulating air. Sleep mode for gradual reduction in intensity of circulating air.



Max Air Flow68mtr³/min
Supply230V 50Hz 40W
Height1090 - 1390mm

Fan Diameter. 400mm
Speeds 3
Modes Normal, Nature, Sleep

3. ASSEMBLY

Unpack carton and assemble the fan as follows:

- 3.1. Fix pole (fig 1.1) to base (fig 1.4) using four screws (fig 1.3) and slide base cover (fig 1.2) over base .
 - 3.2. Fit head unit onto top of pole and secure by tightening knob at base of head.
 - 3.3. Remove the locking nut (fig 2.1) from the centre of the fan.
 - 3.4. **Fitting the rear fan guard.** Identify the rear fan guard by the location holes in the centre plate (fig 2.2) and place the guard over the fan spindle and fit onto the three location pins (fig 2.3.).
 - 3.5. Replace and secure the back guard with locking nut (fig. 2.1).
 - 3.6. **Fitting the fan.** Slide the fan onto the motor shaft until it comes to rest against the pin which is pushed through the shaft. Rotate the fan slightly until the pin comes to rest in the shallow groove in the back of the fan. Now take the large plastic circular lock nut and thread it onto the end of the motor shaft by turning it **anticlockwise**. Hold one of the fan blades with one hand and tighten the nut down onto the fan to hold it in place.
 - 3.7. **Fitting the front fan guard to the rear fan guard.** The front guard has a metal clip attached to it which enables it to hook over the top of the rear guard (fig 3.A) and a screw fix at the bottom (fig 3.B).
 - 3.8. When the metal clip has been hung on the top and the screw attached in the bottom, slide the four clips on the front cover down so they clip to the rear guard.
- If all is correct the fan is now ready to use.



4. OPERATION

- WARNING! Ensure you read, understand and apply the safety instructions in part 1 before using the fan.**
- 4.1. Place the fan in a suitable location on a level surface. Plug into the mains power supply.
 - 4.2. Adjust tilt, direction and height of fan as required.
 - 4.3. Using either the remote control or the buttons on the fan, press the power button to switch the fan on.
 - 4.4. Adjust the fan speed by pressing the speed button. The sequence is Low - Medium - High.
 - 4.5. Set the timer by pressing the timer button. The timer can be set between 30 minutes and 7 hours 30 minutes. Each press increases the time by 30 minutes and is indicated by the appropriate lights.
 Note: depending on time selected, more than one light may light up - add together the lit up times to reach the time set.
 - 4.6. To make the fan oscillate, press the oscillating button. To stop the fan oscillating, press the button again.
 - 4.7. **MODES:** The fan has three mode settings, these are selected by pressing the Mode button. The three modes are:
 Normal, Nature and Sleep.
 - 4.8. Normal is a constant speed.
 - 4.9. Nature is an alternating fast / slow speed.
 - 4.10. Sleep is the same as Nature initially, then after 30 minutes the fan speed will gradually decrease.



5. CARE OF FAN

IMPORTANT: Turn the fan OFF and disconnect from power supply before cleaning.

- 5.1. Use only a soft, damp cloth to clean the fan.
- 5.2. DO NOT submerge the fan in water and NEVER allow water to drip into the motor housing.
- 5.3. DO NOT use solvents or other chemicals to clean the fan.
- 5.4. To clean the fan blades, remove front guard - reverse of assembly procedure 3.7. above.
- 5.5. Wipe the blades and guards clean.
- 5.6. Reassemble front guard following assembly procedure 3.7. and 3.8. above.
- 5.7. Store the fan in its original box or otherwise cover the fan to protect it from dust.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor, Sealey Group,
 Kempson Way, Suffolk Business Park,
 Bury St. Edmunds, Suffolk,
 IP32 7AR

01284 757500
 01284 703534

www.sealey.co.uk
 sales@sealey.co.uk