



INSTRUCTIONS FOR: PLATFORM SCAFFOLD STAND Model No. **SSCL1**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

1.1 GENERAL SAFETY


- ❑ **WARNING!** Take care when using and moving scaffolding, extended ladders and other such equipment in the vicinity of power cables - risk of potentially fatal electric shock.
- ❑ **WARNING!** Ensure Health and Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
 - ✓ Familiarise yourself with the application and limitations of the scaffold, as well as the potential hazards.
 - ✓ Maintain the equipment in good condition.
 - ✓ Replace or repair damaged parts. Use genuine parts only. Non-authorized parts may be dangerous and will invalidate the warranty.
 - ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ❑ **WARNING!** Use scaffold on level and solid ground and ensure the breaks are applied and/or that the scaffold is anchored and held firmly in place by some means.
- ❑ **WARNING!** DO NOT use the scaffolding on sloping ground.
- ❑ **WARNING!** Never over-reach when on the scaffolding.
 - ✓ Keep children and unauthorised persons away from the working area.
 - x **DO NOT** use the scaffolding for any purpose other than that for which it is designed.
 - x **DO NOT** use the equipment if any parts are damaged or missing as this may cause failure and/or personal injury.
 - x **DO NOT** exceed the rated capacity of the scaffolding.
 - x **DO NOT** climb scaffolding to get onto platform, always use a second set of steps.
 - x **DO NOT** allow children to climb the scaffolding.
 - x **DO NOT** use the equipment when you are tired, under the influence of alcohol, drugs or intoxicating medication.
 - ✓ When not in use store in a safe, dry, childproof area.

2. INTRODUCTION

GS/TUV EN131 and GS ZH1/534.8 approved high quality scaffold platform system for the professional tradesman. Robust aluminium frame unit with anodised finish for durable corrosion resistance. Heavy duty platform with trap door for easy manoeuvrability. Can be used as a 3mtr or 4mtr working height platform by fitting extension kit supplied with the unit. Unique design enables the unit to be quickly and easily folded down without tools for transportation or storage. 780mm width means unit will pass through most doorways even when fully erected. High hand rail for comfort and safety. Four large Ø125mm wheels for easy mobility.


3. SPECIFICATION

SSCL1	A	B	C	D	E	Weight
Dimensions (mm)	780	1670	3000	4000	340-2360	36kg

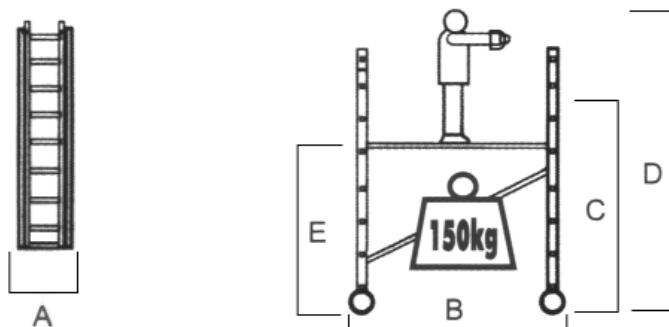

4. CONTENTS AND ASSEMBLY


4.1 Basic scaffold

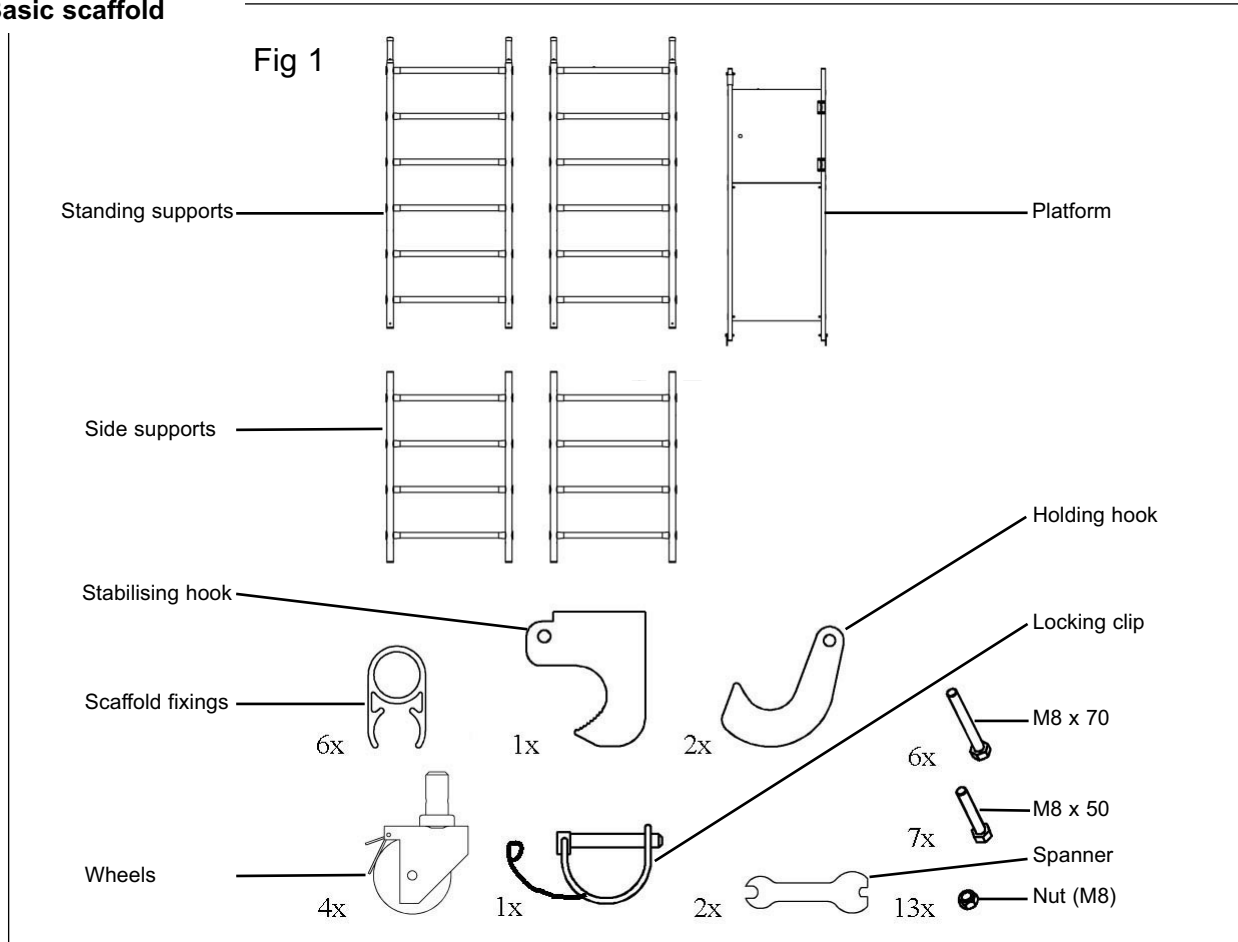


4.1.1 Attach a wheel to the bottom of each upright pole of the standing supports, using bolt M8 x 50 and appropriate nut.



4.1.2 Couple the two side supports using the scaffold fixings and bolt M8 x 70. at the bottom, and the locking clip at the top, as shown




4.1.3 Engage the locking clip and affix the two side supports (now joined) to the two upright standing supports, using scaffold fixings and bolts M8 x 70 + nuts, as shown.

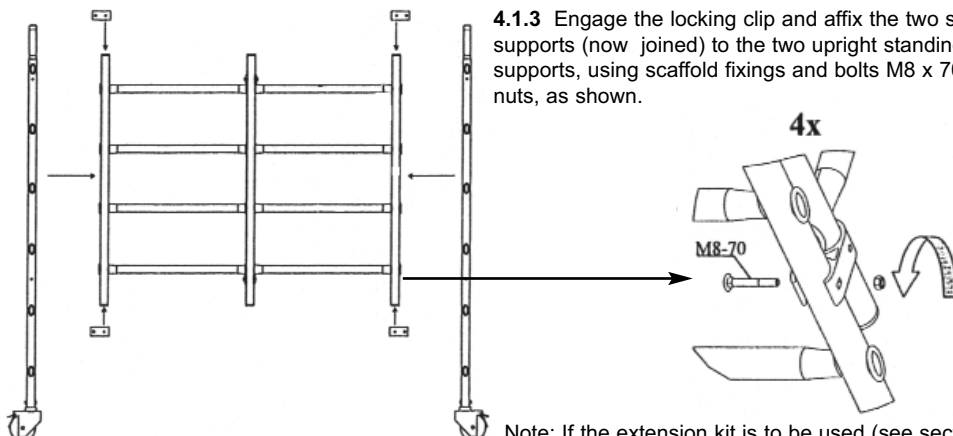


Note: If the extension kit is to be used (see section 4.3), a locking clip must now be installed on one of the top scaffold fixings.


2 X




4.1.4 Attach platform stabilising hooks to the end of the platform furthest from the trapdoor, using bolts M8 x 50 and nuts, as shown.

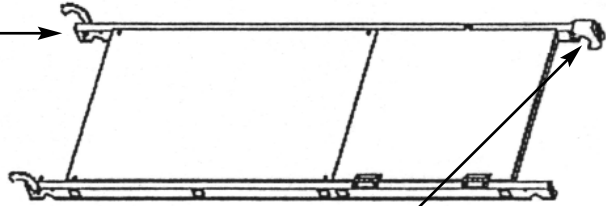

4.1.5 Attach the platform holding hook to the other side of the platform, using bolt M8 x 50 and nut, as shown




4.1.6 Now to complete the construction of the base kit, place the platform onto the supports.

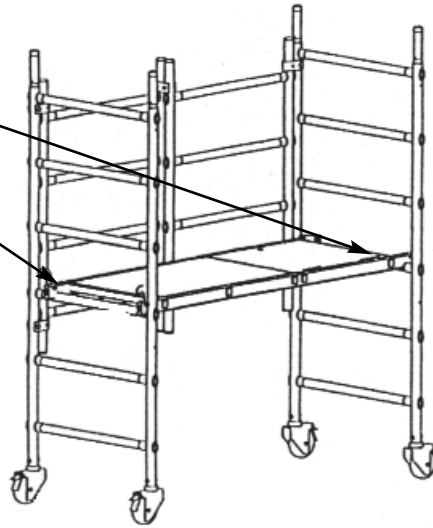

- 4.2 This scaffold can be folded for convenient storage without needing to be dismantled.
- 4.2.1 Remove the platform and place safely to one side, where it cannot over balance and is highly visible.
- 4.2.2 Disengage the locking pin(s).
- 4.2.3 Carefully allow the scaffold to "concertina" and lay it flat. Take great care whilst doing this - ensure that the scaffold is folded and lowered gently and under control and that the area is free from non-essential persons/objects.
- 4.2.4 To re-erect the scaffold, reverse the procedure outlined above.

4.3 Extension kit

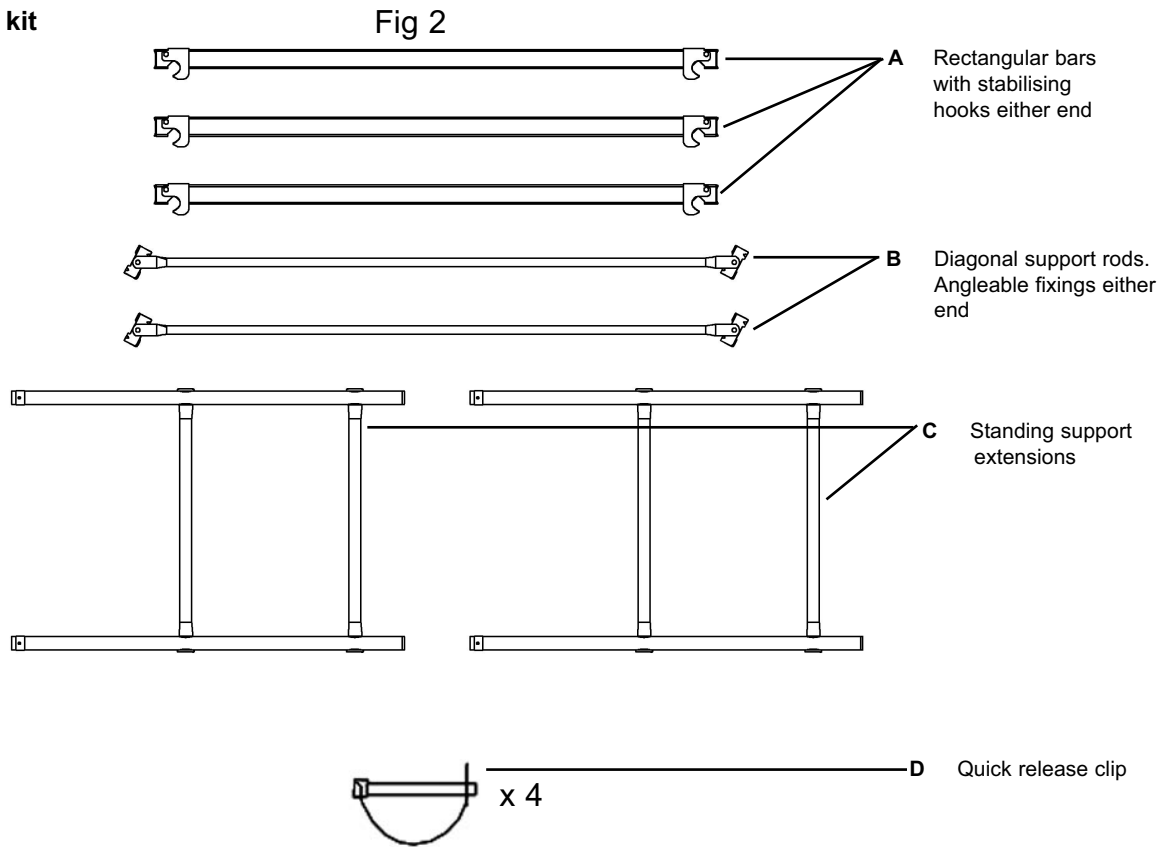

- 4.3.1 First, fit the lower rectangular bar i.e. at the base of the scaffold (Fig 3. A#1)
- 4.3.2 Fit the lower diagonal support rod (Fig 3. B#1). See fig 4 (overleaf) for directions on fitting the angleable fixings.
- 4.3.3 Fit the two standing support extensions, by inserting them into the tops of the standing supports and then secure them using the quick release clips (Figs 2 & 3. D).
- 4.3.4 Fit the upper diagonal support rod (Fig 3. B#2)
- 4.3.5 Fit the remaining two rectangular bars to the top of the scaffold (Fig 3 A#2, A#3).



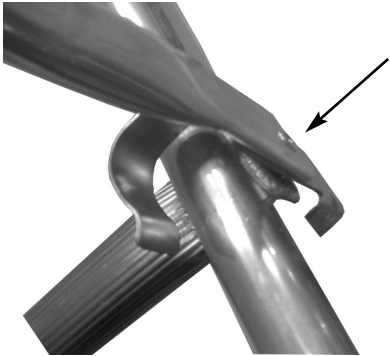


Fig 4: Attaching the angleable fixings


1. Place the fixing against the standing support. Ensure that fixing is perpendicular to the standing support. The rubber coated protrusion in the centre of the fixing, should be aligned with the appropriate tube in the standing support.




2. Insert the protrusion into the tube, by firmly tapping the back of the fixing.

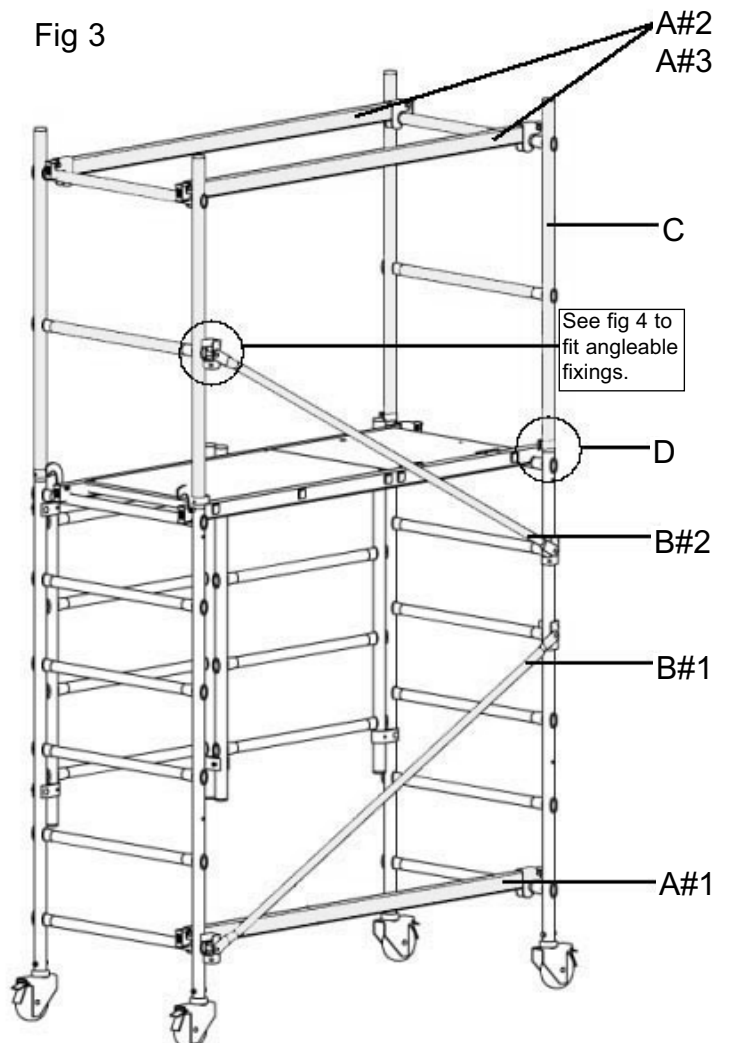

3. Rotate the fixing in the direction required for it to "clip" onto the standing support. This may require significant pressure which should be applied carefully and in a controlled manner to avoid potential injury to hands/fingers.

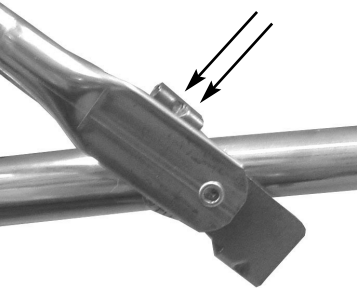

4. The fixing should now be clipped securely to the standing support. **WARNING:** Violent and/or excessive movement of the diagonal support rod may loosen and/or damage the fixing. Be sure to check all fixings are secure and intact before using the scaffold.



4.4 The extension kit must be completely removed before the scaffold can be folded and stored (see section 4.2). In order to remove the extension kit, simply reverse the procedure outlined in section 4.3.

5. MAINTENANCE

- 5.1 Inspect the scaffold before and after each use, check for damaged/suspect components. Should any such components be found, remove the scaffold from service immediately. Contact your authorised Sealey dealer for replacement/repair parts.
- 5.2 Keep the scaffold clean and free of any hazardous substances (including corrosive substances, and those which could cause a person to slip e.g. oil, paint etc)

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: Call 01284 757525 for our catalogue & promotions. Leave your full name, address & postcode.

	Sole UK Distributor, Sealey Group, Bury St. Edmunds, Suffolk.		
 01284 757500	 01284 703534	 sales@sealey.co.uk	 www.sealey.co.uk